


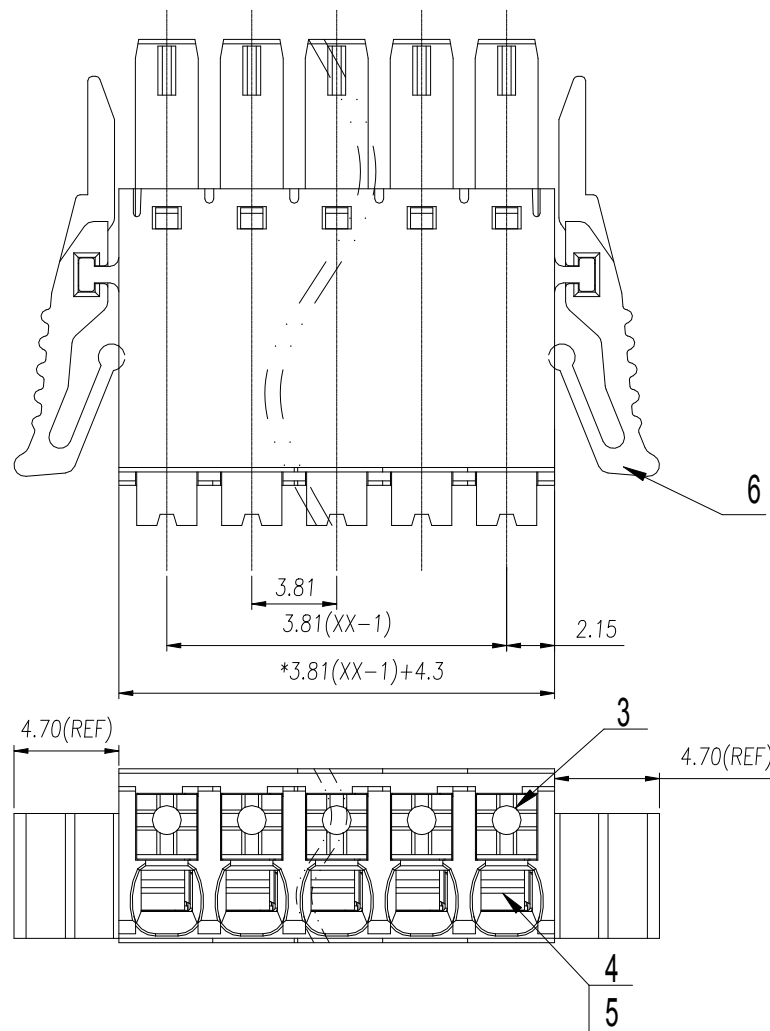

REVISION RECORD						
REV.	DESCRIPTION			ECN No.	APPROVED	DATE
V0	新发行				WangP	24.09.06
UL/CUL 技术参数 UL/CUL Technical Data						
等级		Use Group		B	C	D
额定电压		Rated Voltage [V]		300	-	300
额定电流		Rated Current [A]		10	-	10
接线范围		Wire Range				
单/多芯线		Solid/Stranded [AWG]		28-16		
耐电压		Withstanding Voltage		1600V/1Min		
IEC 技术参数 IEC Technical Data				IEC61984		
过电压类别		Overvoltage Category		III	III	II
污染等级		Contamination Class		3	2	2
额定电压		Rated Voltage [V]		160	160	320
额定电流		Rated Current [A]		10	10	10
额定冲击电压		Impulse withstand voltage [KV]		2.5	2.5	2.5
导线截面积		Conductor cross section				
硬质/柔性导线		Solid/ flexible [mm ²]		0.2-1.5		
一般参数 Other Data						
间距 Pitch / 极数		Poles [mm] / [P]		3.81 /02~24		
剥线长度		Stripping Length [mm]		9~10		
工作温度		Operating temperature [°C]		-40~105		
符合RoHS环保要求						

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

6	Hook	PA66	UL94V-0
5	Spring	Stainless Steel	
4	Clamp	Copper Alloy	Sn Plated
3	Button	PA66(G25)	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WangP	DATE	24.09.06	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	YangHJ	DATE	24.09.06	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	JASON	DATE	24.09.06	SCALE	3:1	DRAWING TYPE: SP-03	REV	V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15KVG-3.81-XXP-1Y-00A		