

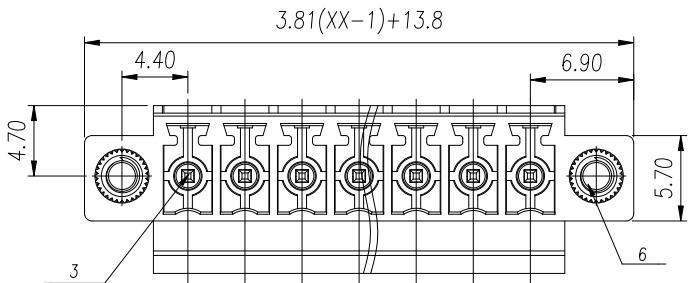


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		ChenK	25.07.22

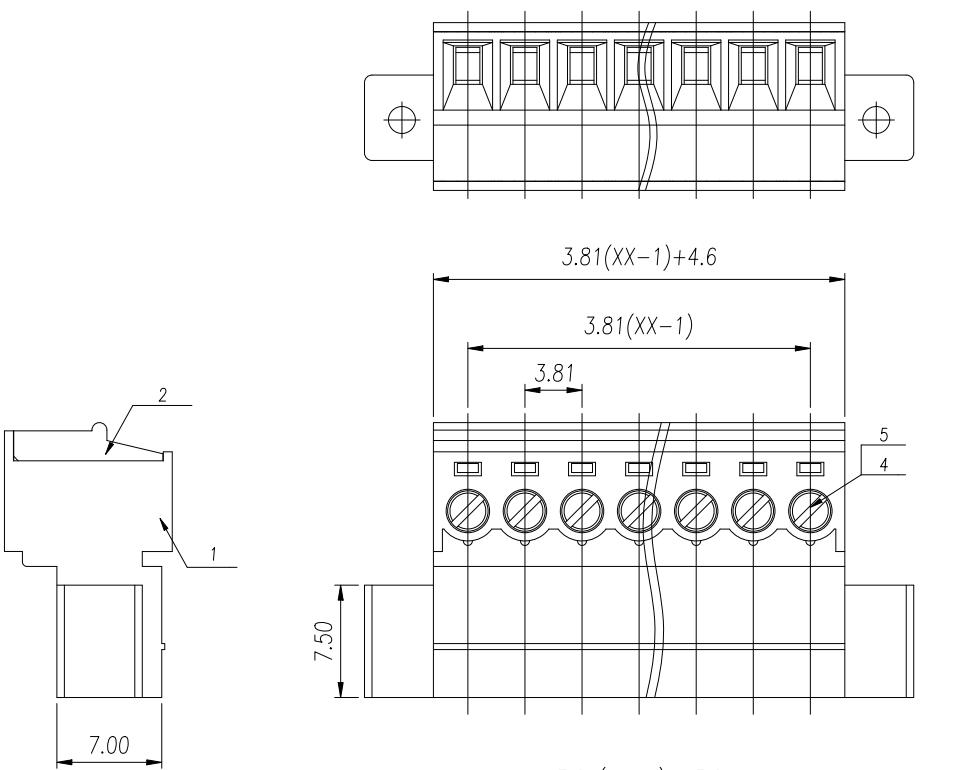

General Tolerances

variable range	— □ ⊥									
	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 200	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

ITEM	NAME OF PART	MATERIAL	NOTES
6	Nut	Copper Alloy	M2.5
5	Cage	Copper Alloy	M2/Ni Plated
4	Screw	Steel	M2/Zn Plated
3	Pin	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ15EDGKRN-3.81-XXP-1Y-00A

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]			28-16
耐电压	Withstanding Voltage			1600V/1min
IEC 技术参数	IEC Technical Data			
过电压类别	Overshoot Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面	Conductor cross section			
硬质/柔性导线	Solid/ flexible [mm²]			0.2-1.5
一般参数 Other Data				
间距	Pitch /极数 Poles [mm] / [P]			3.81/02~24
剥线长度	Stripping Length [mm]			6~7
螺丝	Screw/Torque(Max) [N.m]			M2/0.2
工作温度	Operating temperature [°C]			-40~105
符合RoHS环保要求				