

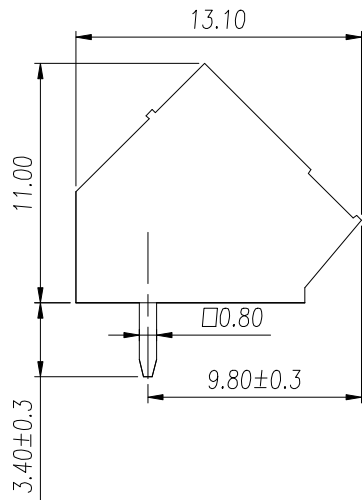
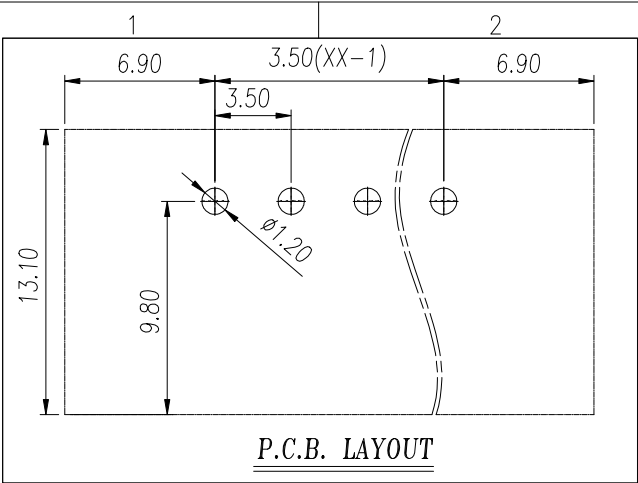


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

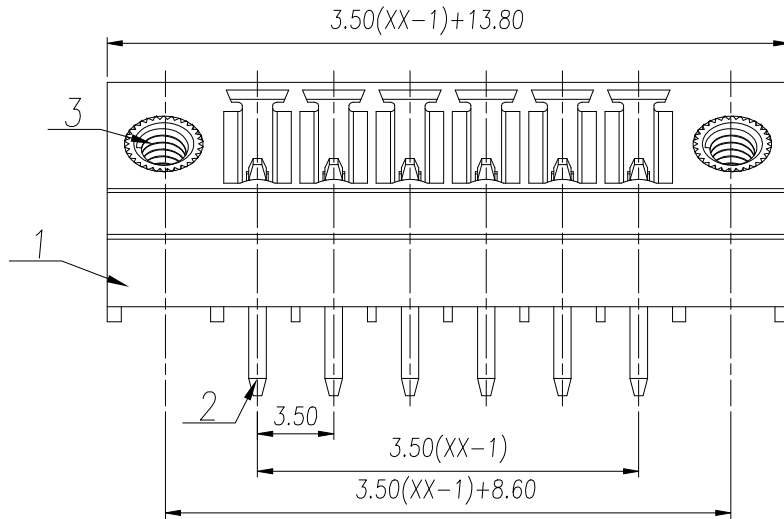

General Tolerances								—	▤	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

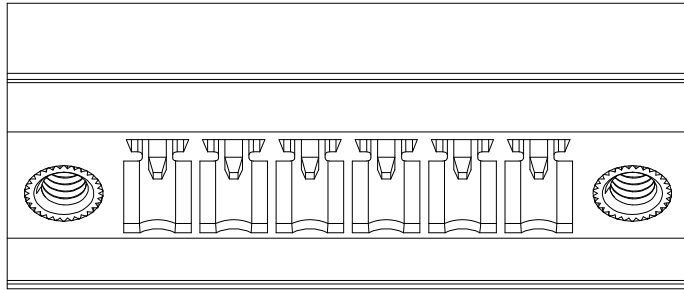

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.11.29

UL/CUL 技术参数		UL/CUL Technical Data			UL/CUL Technical Data						
等级	Use Group	B	C	D	等级	Use Group	B C D				
额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300 - 300				
额定电流	Rated Current [A]	8	-	8	额定电流	Rated Current [A]	8 - 8				
接线范围	Wire Range	-			接线范围	Wire Range	-				
单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]					
耐电压	Withstanding Voltage	1600V/1Min			耐电压	Withstanding Voltage	1600V/1Min				
IEC 技术参数		IEC61984			IEC 技术参数		IEC61984				
IEC Technical Data					IEC Technical Data						
过电压类别	Overvoltage Category	III	III	II	过电压类别	Overvoltage Category	III III II				
污染等级	Contamination Class	3	2	2	污染等级	Contamination Class	3 2 2				
额定电压	Rated Voltage [V]	160	160	320	额定电压	Rated Voltage [V]	160 160 320				
额定电流	Rated Current [A]	7	7	7	额定电流	Rated Current [A]	7 7 7				
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5	额定冲击电压	Impulse withstand voltage [KV]	2.5 2.5 2.5				
导线截面积	Conductor cross section	-			导线截面积	Conductor cross section	-				
硬质/柔性导线	Solid/flexible [mm²]				硬质/柔性导线	Solid/flexible [mm²]					
一般参数		Other Data			一般参数		Other Data				
间距	Pitch / 极数 Poles [mm] / [P]	3.5 / 02-24			间距	Pitch / 极数 Poles [mm] / [P]	3.5 / 02-24				
工作温度	Operating temperature [°C]	-40~105			工作温度	Operating temperature [°C]	-40~105				
焊锡温度	Soldering temperature	260°C/5S			焊锡温度	Soldering temperature	260°C/5S				
符合RoHS环保要求					符合RoHS环保要求						
3	NUT	Copper Alloy		M2.5	3	NUT	Copper Alloy		M2.5		
2	Pin	Copper Alloy		Sn Plated	2	Pin	Copper Alloy		Sn Plated		
1	Housing	PA66		UL94V-0	1	Housing	PA66		UL94V-0		
ITEM	NAME OF PART	MATERIAL		NOTES	ITEM	NAME OF PART	MATERIAL		NOTES		

DES.	YuCZ	DATE	23.11.29	UNITS	mm	THIRD ANGLE PROJECTION	☉
CHK.	YangHJ	DATE	23.11.29	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.29	SCALE	3:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGLM-3.5-XXP-1Y-00A	