

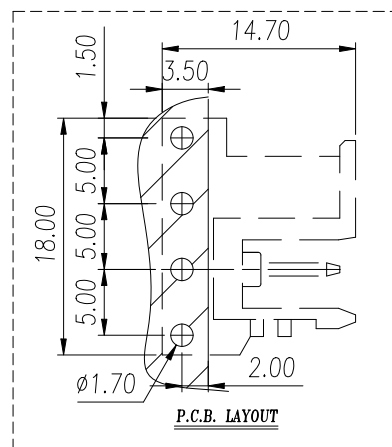


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。

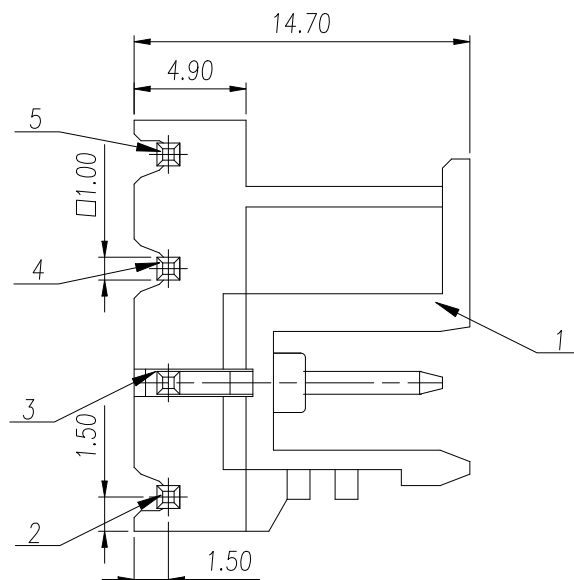

REVISION RECORD							
REV.	ESCRPTION				ECN No.	APPROVED	DATE
V0	新发行					YaoFei	23.10.23
1	UL/CUL 技术 参数						
	UL/CUL Technical Data						
	等 级		Use Group		B	C	D
	额定电压		Rated Voltage	[V]	300	-	300
	额定电流		Rated Current	[A]	15	-	10
	接线范围		Wire Range	-			
	单/多芯线		Solid/Stranded				
	耐电压		Withstanding Voltage	1600V/1Min			
	IEC 技术参数				IEC61984		
	IEC Technical Data						
	过电压类别		Overvoltage Category		III	III	II
	污染等级		Contamination Class		3	2	2
	额定电压		Rated Voltage	[V]	250	320	400
	额定电流		Rated Current	[A]	16	16	16
	额定冲击电压		Impulse withstand voltage	[KV]	4.0	4.0	4.0
	导线截面积		Conductor cross section	-			
	硬质/柔性导线		Solid/ flexible				
	一般参数 Other Data						
	间距		Pitch / 极数	Poles	[mm] / [P]	5.0 / 04P	
	工作温度		Operating temperature	[°C]	-40~105		
焊锡温度		Soldering temperature	260°C/5S				
引针尺寸		Pin Dimensions	[mm]	1.0*1.0			
PCB板孔径		PCB Hole Diameter	[mm]	Ø1.7			
符合RoHS环保要求							

S.	YaoFei	DATE	23.10.23	UNITS	mm	THIRD ANGLE PROJECTION	
K.	YangHJ	DATE	23.10.23	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
P.	JASON	DATE	23.10.23	SCALE	2.5:1	DRAWING TYPE: SP-03	REV V0

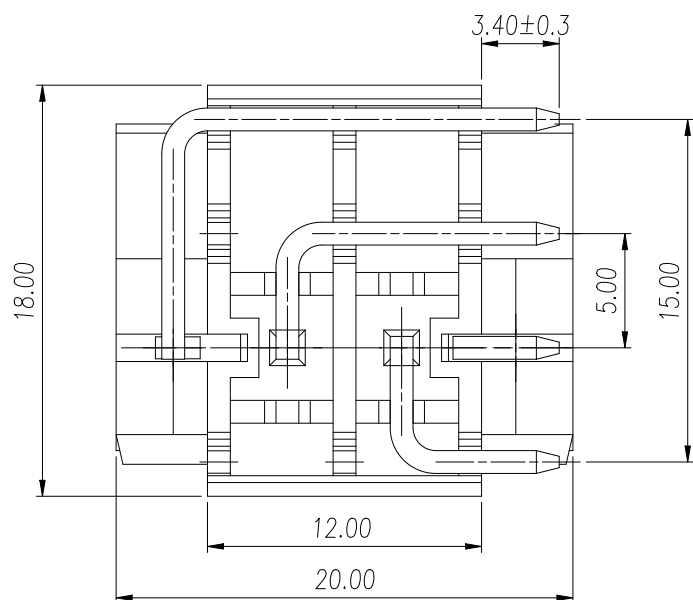

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ2EDGRF-5.0-04P-1Y-00A

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Pin 4	Copper Alloy	Sn Plated
4	Pin 3	Copper Alloy	Sn Plated
3	Pin 2	Copper Alloy	Sn Plated
2	Pin 1	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES