
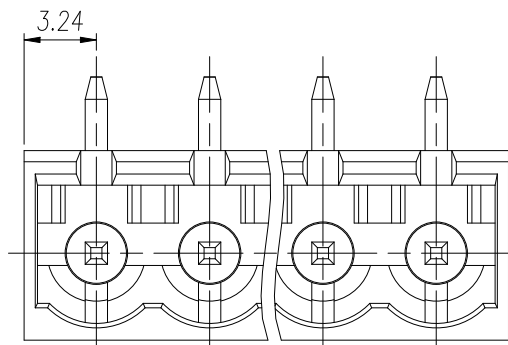
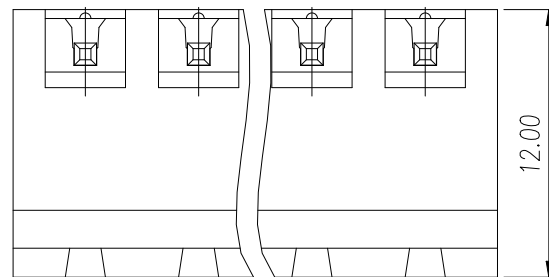
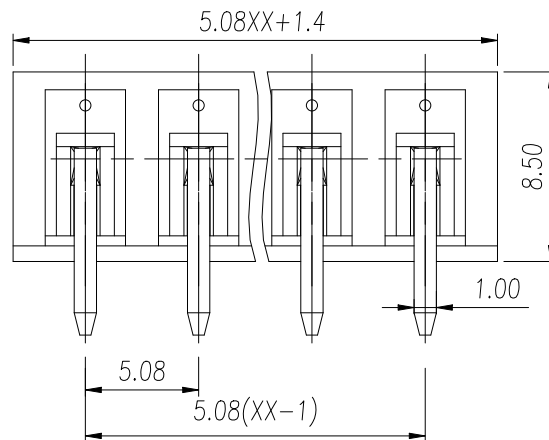


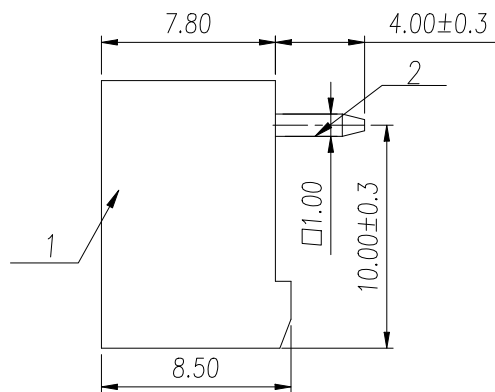

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

YaoFei	DATE	24.01.19	UNITS	mm	THIRD ANGLE PROJECTION		
YangHJ	DATE	24.01.19	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
JASON	DATE	24.01.19	SCALE	3:1	DRAWING TYPE: SP-03	REV	0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ2EDGRRC-5.08-XXP-1Y-00A		

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		YaoFei	24.01.19

UL/CUL	技术参数			
UL/CUL	Technical Data			
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range	-		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数		IEC61984		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0	4.0
导线截面积				
硬质/柔性导线	Solid/flexible [mm²]	-		
一般参数 Other Data				
间距	Pitch / 极数 Poles [mm] / [P]	5.08 / 02~24		
工作温度	Operating temperature [°C]	-40~105		
焊锡温度	Soldering temperature	260°C/5S		
引针尺寸	Pin Dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.7		
符合RoHS环保要求				