
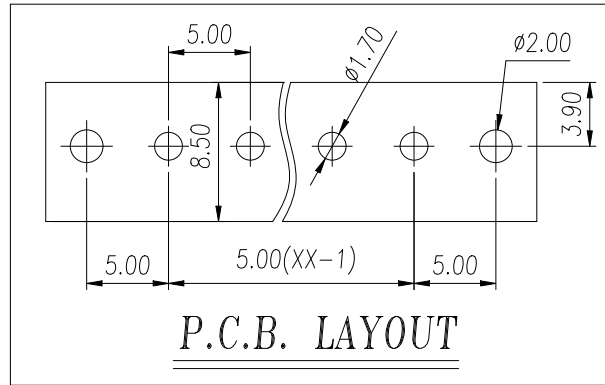
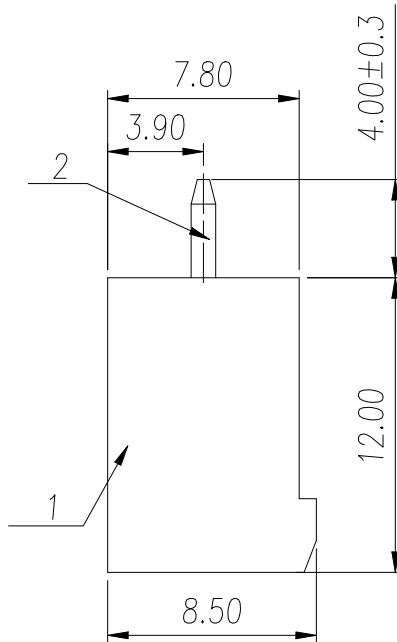
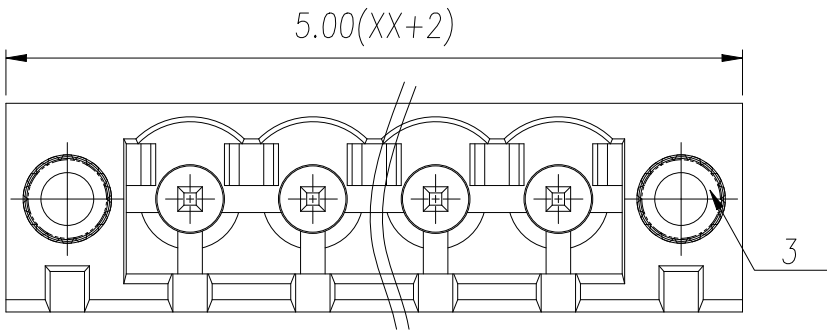


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除丰给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

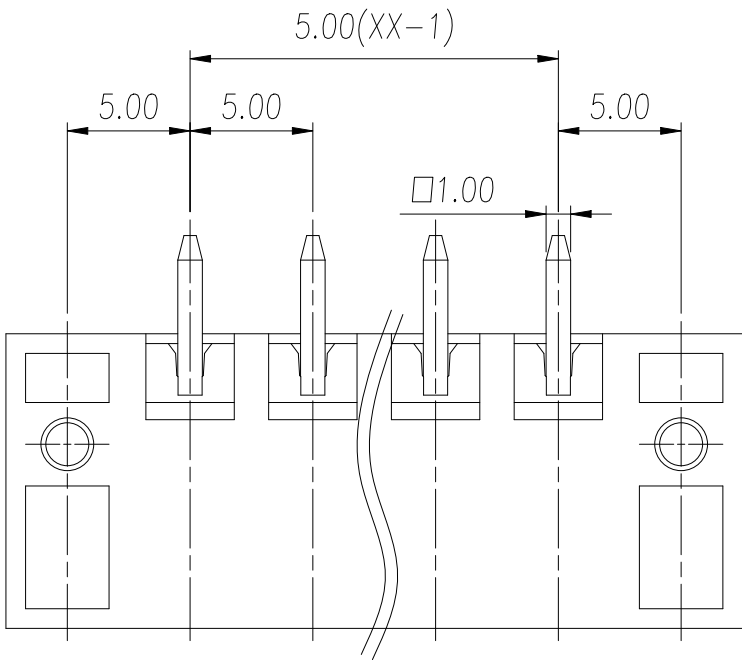

P.C.B. LAYOUT

REVISION RECORD				
REV.	ESCRPTION	ECN No.	APPROVED	DATE
0	新发行		YaoFei	24.01.22

UL/CUL 技术参数		UL/CUL Technical Data			
等级	Use Group	B	C		
额定电压	Rated Voltage [V]	300	-		
额定电流	Rated Current [A]	15	-		
接线范围	Wire Range	-			
单/多芯线	Solid/Stranded [AWG]				
耐电压	Withstanding Voltage	1600V/1Min			
IEC 技术参数					
IEC Technical Data					
过电压类别	Overvoltage Category	III	III		
污染等级	Contamination Class	3	2		
额定电压	Rated Voltage [V]	250	320		
额定电流	Rated Current [A]	15	15		
额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0		
导线截面积	Conductor cross section	-			
硬质/柔性导线	Solid/ flexible [mm²]				
一般参数 Other Data					
间距 Pitch /极数 Poles	[mm] / [P]	5.0 / 02-24			
工作温度	Operating temperature [°C]	-40-105			
焊锡温度	Soldering temperature	260°C/5S			
引针尺寸	Pin Dimensions [mm]	1.0*1.0			
PCB板孔径	PCB Hole Diameter [mm]	Ø1.7			
符合RoHS环保要求					

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

				DES.	YaoFei	DATE	24.01.22	UNITS	mm	THIRD ANGLE PROJECTION		
3	Nut	Copper Alloy	M2.5	CHK.	YangHJ	DATE	24.01.22	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
2	Pin	Copper Alloy	Sn Plated	APP.	JASON	DATE	24.01.22	SCALE	3:1	DRAWING TYPE: SP-03	REV	0
1	Housing	PA66	UL94V-0	 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ2EDGVM-5.0-XXP-1Y-00A		
ITEM	NAME OF PART	MATERIAL	NOTES									

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

