

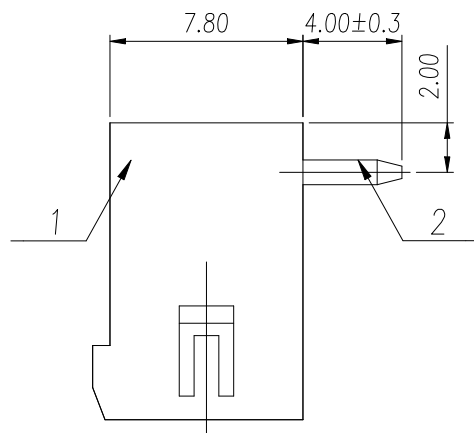


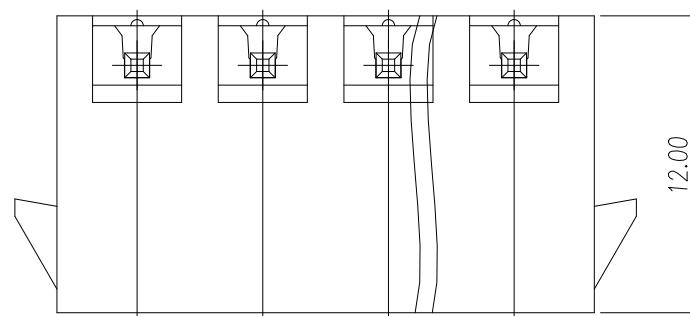

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

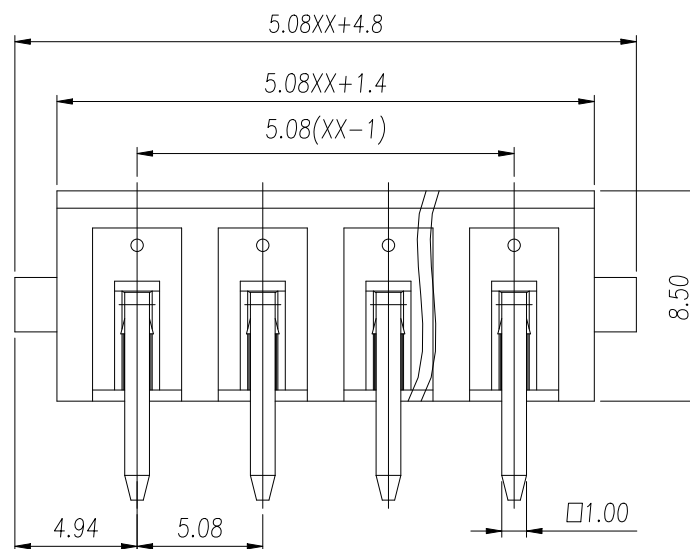

2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD									
REV.	DESCRIPTION				ECN No.	APPROVED	DATE		
0	新发行					YaoFei	24.01.22		
UL/CUL 技术参数 UL/CUL Technical Data									
等级		Use Group			B	C	D		
额定电压		Rated Voltage [V]			300	-	300		
额定电流		Rated Current [A]			15	-	10		
接线范围		Wire Range			-				
单/多芯线		Solid/Stranded [AWG]							
耐电压		Withstanding Voltage			1600V/1Min				
IEC 技术参数					IEC61984				
IEC Technical Data									
过电压类别		Overvoltage Category			III	III	II		
污染等级		Contamination Class			3	2	2		
额定电压		Rated Voltage [V]			250	320	400		
额定电流		Rated Current [A]			15	15	15		
额定冲击电压		Impulse withstand voltage [KV]			4.0	4.0	4.0		
导线截面积		Conductor cross section			-				
硬质/柔性导线		Solid/ flexible [mm²]							
一般参数 Other Data									
间距		Pitch /极数 Poles [mm]/[P]			5.08 / 02~24				
工作温度		Operating temperature [°C]			-40~105				
焊锡温度		Soldering temperature			260°C/5S				
引针尺寸		Pin Dimensions [mm]			1.0*1.0				
PCB板孔径		PCB Hole Diameter [mm]			Ø1.7				
符合RoHS环保要求									

S.	YaoFei	DATE	24.01.22	UNITS	mm	THIRD ANGLE PROJECTION			
K.	YangHJ	DATE	24.01.22	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
P.	JASON	DATE	24.01.22	SCALE	3:1	DRAWING TYPE: SP-03		REV	0



慈溪市万捷电子有限公司
 CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
 WJ2EDGRG-5.08-XXP-1Y-00A