


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。使用新型和外观设计专利的所有权利。

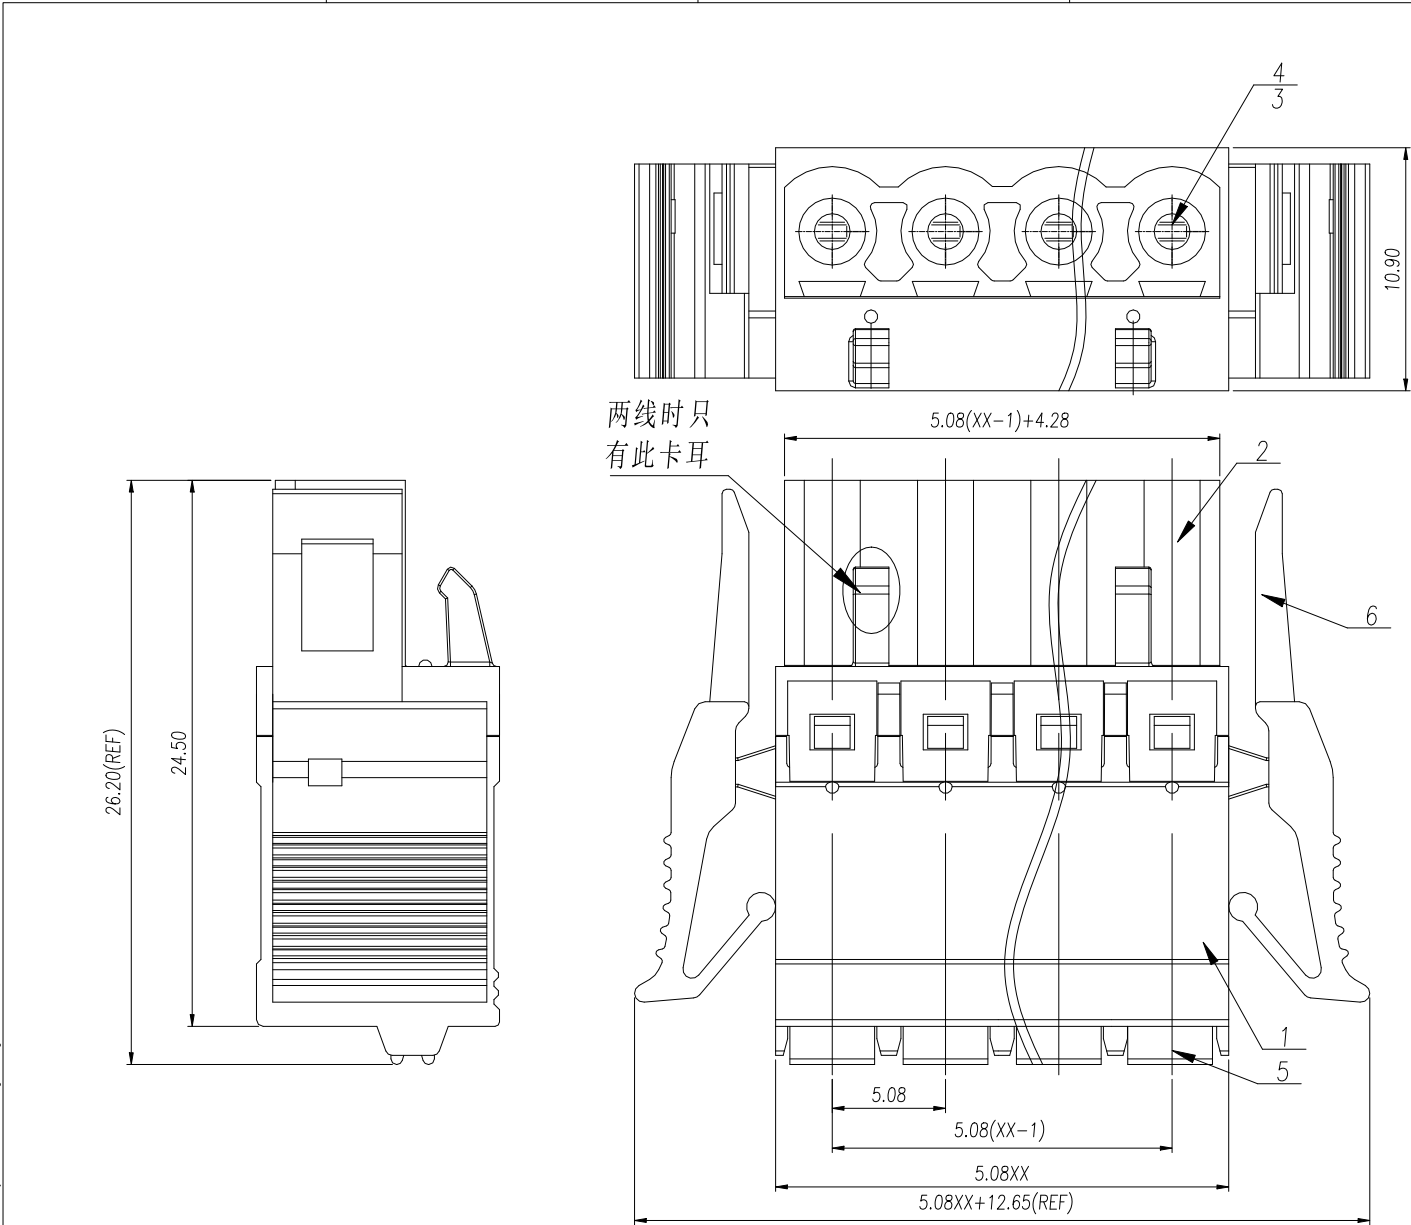

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD												
REV.		DESCRIPTION				ECN No.		APPROVED		DATE		
0		新发行						YaoFei		24.01.17		
		UL/CUL 技术参数 UL/CUL Technical Data										
		等 级 Use Group				B		C		D		
		额定电压 Rated Voltage [V]				300		-		300		
		额定电流 Rated Current [A]				12		-		10		
		接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]				24-16						
		耐电压 Withstanding Voltage				1600V/1Min						
		IEC 技术参数 IEC Technical Data				IEC61984						
		过电压类别 Overvoltage Category				III		III		II		
		污染等级 Contamination Class				3		2		2		
		额定电压 Rated Voltage [V]				320		320		630		
		额定电流 Rated Current [A]				12		12		12		
		额定冲击电压 Impulse withstand voltage [KV]				4.0		4.0		4.0		
		导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]				0.2-1.5/0.2-2.5						
		一般参数 Other Data										
		间距 Pitch /极数 Poles [mm] / [P]				5.08 / 02~24						
		剥线长度 Stripping Length [mm]				11~12						
		工作温度 Operating temperature [°C]				-40~105						
		符合RoHS环保要求										
		6		Hook		PA66		UL94V-0				
		5		Button		POM		UL94-HB				
		4		Clamp		Copper Alloy		Sn Plated				
		3		Spring		Stainless steel						
		2		Cover		PA66		UL94V-0				
		1		Housing		PA66		UL94V-0				
		ITEM		NAME OF PART		MATERIAL		NOTES				
		YaoFei	DATE	24.01.17	UNITS	mm	THIRD ANGLE PROJECTION					
		YangHJ	DATE	24.01.17	SIZE	A4	TYPE: CUSTOMER DRAWING				SHEET 1 of 1	
		JASON	DATE	24.01.17	SCALE	3:1	DRAWING TYPE: SP-03				REV 0	
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ2EDGKNG-5.08-XXP-1Y-00A							