


Transfer or duplication of this document as well as the utilization of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容, 侵权者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

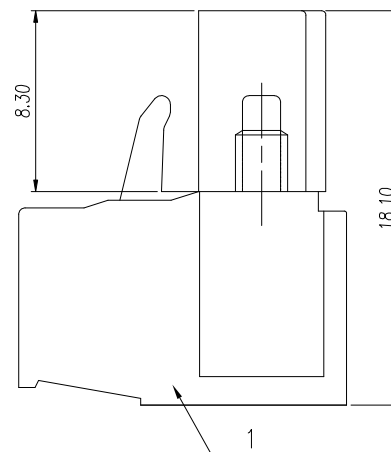

UL/CUL	技术 参数	
UL/CUL	Technical Data	

接线范围	Wire Range	
单/多芯线	Solid/Stranded [AWG]	28-12
耐电压	Withstanding Voltage	1600V/1Min

额定冲击电压 Impulse withstand voltagea	[KV]	4.0	4.0
导线截面 Conductor cross section		0.2-2.5	
硬质/柔性导线 Solid/ flexible	[mm ²]		

一般参数 Other Data	
间距 Pitch /极数 Poles	[mm]/[P] 5.0/02-24
剥线长度 Stripping Length	[mm] 7~8
螺丝 Screw/扭矩 Torque(Max)	[N.m] M3/0.5
工作温度 Operating temperature	[°C] -40~105

DES.	CY	DATE	25.03.13	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	YangHJ	DATE	25.03.13	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	JASON	DATE	25.03.13	SCALE	3:1	DRAWING TYPE: SP-03	REV	0

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	PART NO.: WJ2EDGKM-5.0-XXP-1Y-00A
--	--------------------------------------

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60