



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。 本公司保留对涉及发明、实用新型和外观专利的所有权利。

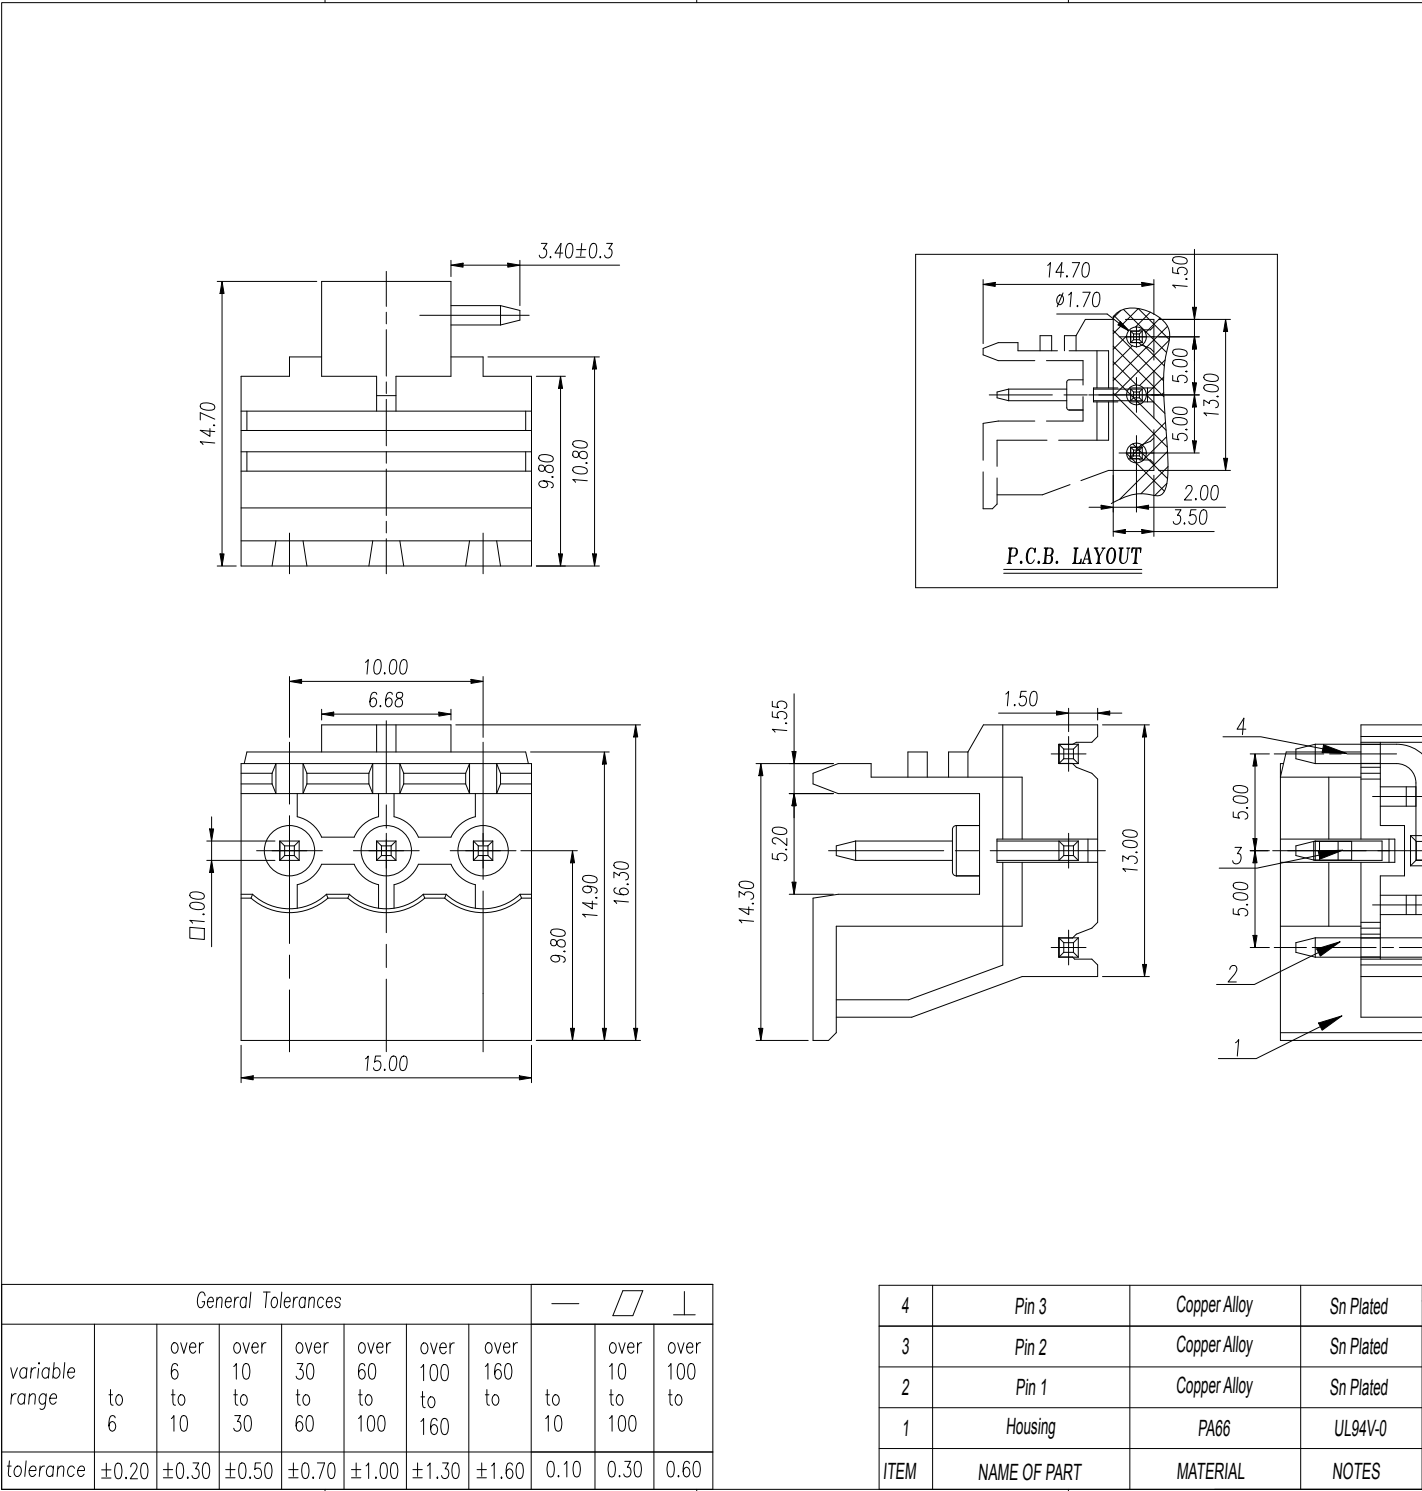

REVISION RECORD										
REV.	DESCRIPTION					ECN No.	APPROVED		DATE	
V0	新发行						YaoFei		23.10.23	
UL/CUL 技术 参数 UL/CUL Technical Data										
等 级		Use Group				B	C	D		
额定电压		Rated Voltage				[V]	300	-	300	
额定电流		Rated Current				[A]	15	-	10	
接线范围		Wire Range				-				
单/多芯线		Solid/Stranded								[AWG]
耐电压		Withstanding Voltage				1600V/1Min				
IEC 技术参数						IEC61984				
IEC Technical Data										
过电压类别		Overvoltage Category				III	III	II		
污染等级		Contamination Class				3	2	2		
额定电压		Rated Voltage				[V]	250	320	400	
额定电流		Rated Current				[A]	16	16	16	
额定冲击电压		Impulse withstand voltage				[KV]	4.0	4.0	4.0	
导线截面积		Conductor cross section				-				
硬质/柔性导线		Solid/ flexible								[mm²]
一般参数 Other Data										
间距 Pitch /极数 Poles		[mm] / [P]				5.0 / 03P				
工作温度		Operating temperature				[°C]	-40~105			
焊锡温度		Soldering temperature				260°C/5S				
引针尺寸		Pin Dimensions				[mm]	1.0*1.0			
PCB板孔径		PCB Hole Diameter				[mm]	Ø1.7			
符合RoHS环保要求										



YaoFei	DATE	23.10.23	UNITS	mm	THIRD ANGLE PROJECTION	
YangHJ	DATE	23.10.23	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
JASON	DATE	23.10.23	SCALE	2.5:1	DRAWING TYPE: SP-03	REV V0

 慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ2EDGRF-5.0-03P-1Y-00A