


## REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	24.05.11

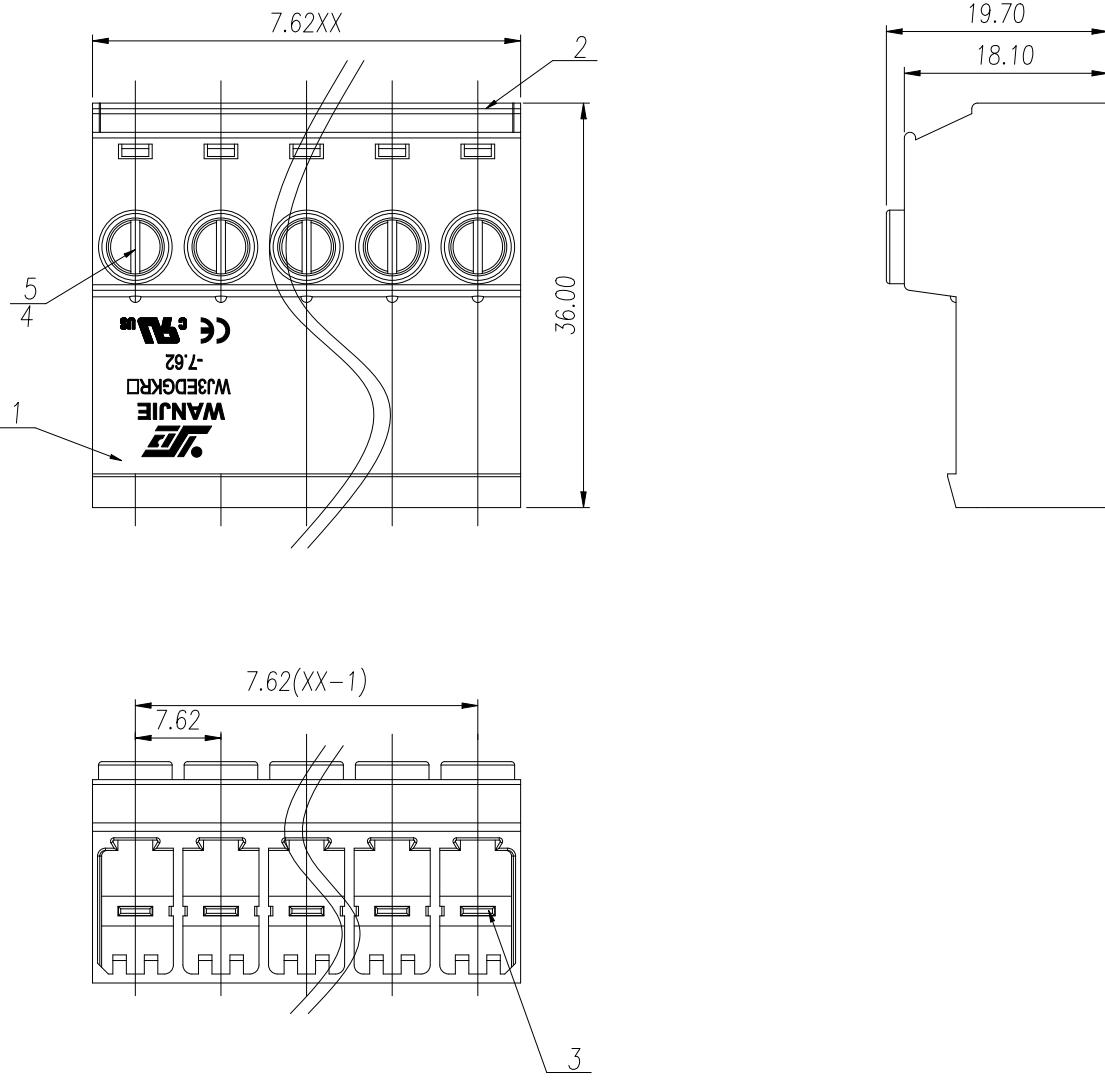

General Tolerances											
variable range	to	over	over	over	over	over	over	over	over	over	over
		6	10	30	60	100	160	10	100	100	100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

UL/CUL 技术参数		UL/CUL Technical Data					
等级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	600	600	/			
额定电流	Rated Current [A]	41	41	/			
接线范围 Wire Range		24-8					
单/多芯线 Solid/Stranded [AWG]							
耐电压 Withstanding Voltage	2200V/1Min						
IEC 技术参数		IEC61984					
IEC Technical Data							
过电压类别 Overvoltage Category	III	III	II				
污染等级 Contamination Class	3	2	2				
额定电压 Rated Voltage [V]	1000	1000	1000				
额定电流 Rated Current [A]	41	41	41				
额定冲击电压 Impulse withstand voltage [KV]	8.0	8.0	6.0				
导线截面积 Conductor cross section	0.2-6.0						
硬质/柔性导线 Solid/ flexible [mm <sup>2</sup> ]							
一般参数 Other Data							
间距 Pitch /极数 Poles [mm] / [P]	7.62 / 02-12						
剥线长度 Stripping Length [mm]	10						
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5						
工作温度 Operating temperature [°C]	-40~105						
符合RoHS环保要求							
5	Screw	Steel	M3/Zn Plated				
4	Cage	Copper Alloy	M3/Ni Plated				
3	Carrier	Copper Alloy	Sn Plated				
2	Cover	PA66	UL94V-0				
1	Housing	PA66	UL94V-0				
ITEM	NAME OF PART		MATERIAL	NOTES			
DES.	YuCZ	DATE	24.05.11	UNITS mm THIRD ANGLE PROJECTION			
CHK.	YangHJ	DATE	24.05.11	SIZE A4 TYPE: CUSTOMER DRAWING SHEET 1 of 1			
APP.	JASON	DATE	24.05.11	SCALE 1.5:1 DRAWING TYPE: SP-03 REV V0			
		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					
		PART NO.: WJ3EDGKR-7.62-XXP-1Y-00A					