


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.11.27

A

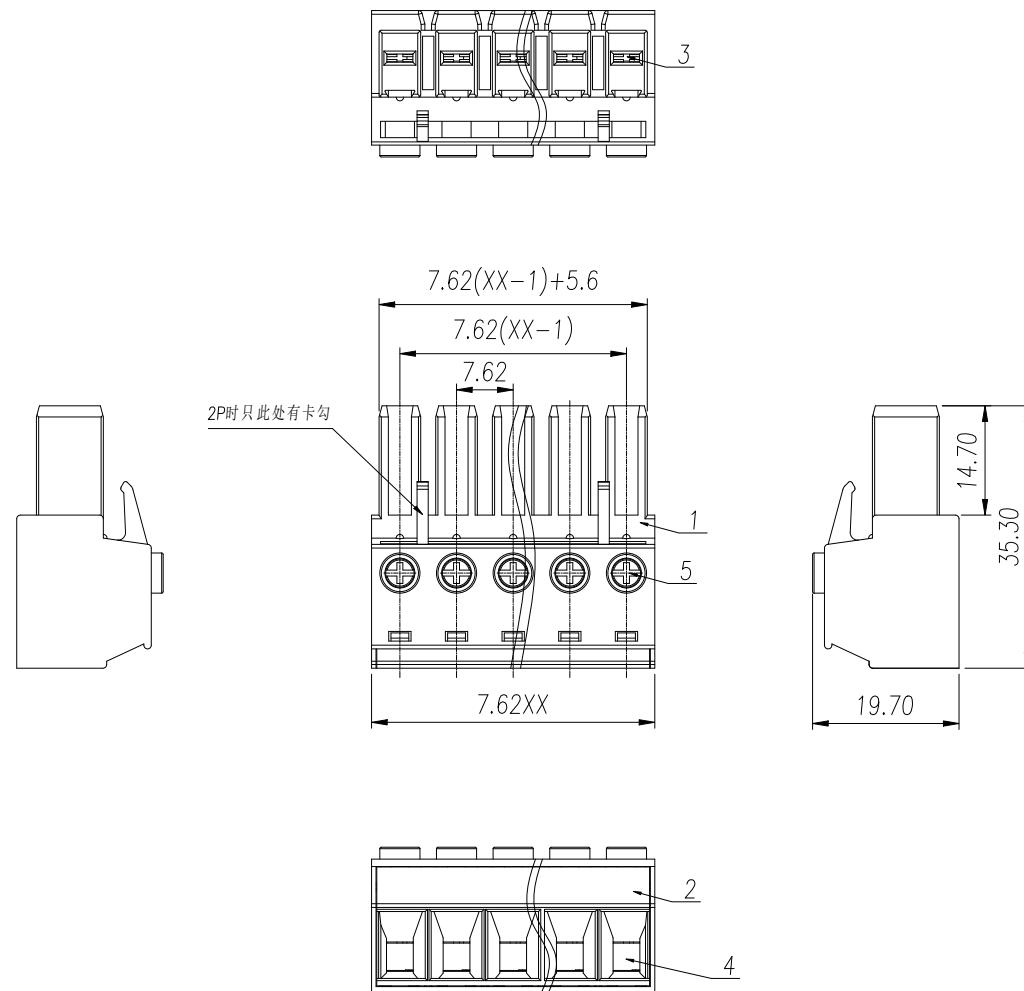

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	41	-	5
接线范围	Wire Range 单/多芯线 Solid/Stranded [AWG]	24-8		
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数 IEC Technical Data		IEC61984		
过电压类别	Overshoot Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [kV]	8.0	8.0	6.0
导线截面积	Conductor cross section 硬质/柔导线 Solid/ flexible [mm²]	0.2-6.0		
一般参数 Other Data				
间距	Pitch / 极数 Poles [mm] / [P]	7.62 / 02~12		
剥线长度	Stripping Length [mm]	10		
工作温度	Operating temperature [°C]	-40~105		
符合RoHS环保要求				
5	Screw	Steel	M3/Zn Plated	
4	Cage	Copper Alloy	M3/Ni Plated	
3	Clamp	Copper Alloy	Sn Plated	
2	Cover	PA66	UL94V-0	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	

DES.	YuCZ	DATE	23.11.27	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	23.11.27	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.27	SCALE	1:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ3EDGKH-7.62-XXP-1Y-00A	

FOR-0371 Rev.1.0

A

B

C

D