

1



2

3

4

5

6

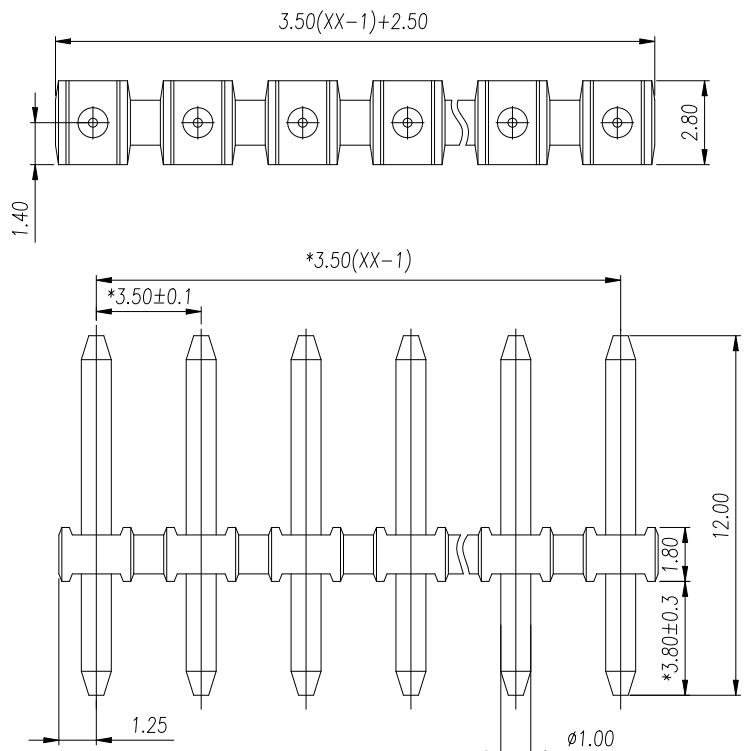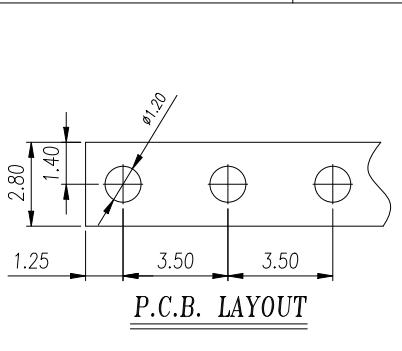

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ChenK	25.04.18

UL/CUL 技术参数			
UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]			
耐电压 Withstanding Voltage	1600V/1Min		
IEC 技术参数			
IEC Technical Data	IEC60947-7-4		
过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	160	250	250
额定电流 Rated Current [A]	8	8	8
额定冲击电压 Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section			
硬质/柔性导线 Solid/ flexible [mm ²]			
一般参数 Other Data			
间距 Pitch /极数 Poles [mm] / [P]	3.5 / 02~16		
剥线长度 Stripping Length [mm]	-		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		
工作温度 Operating temperature [°C]	-40~105		

General Tolerances

variable range	— □ ⊥									
	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0

DES.	ChenK	DATE	25.04.18	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	25.04.18	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	25.04.18	SCALE	4:1	DRAWING TYPE: SP-03	REV V0
						PART NO.:	WJ333J-3.5-XXP-1Y-00A

1

2

3

4

5

FOR-0371 Rev. 1.0