

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除特别声明外，未经许可，不得复制或传播。本公司保留对涉及发明、实用新型和外观设计的所有权利。

1

2

3






4

5

6

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.11.27

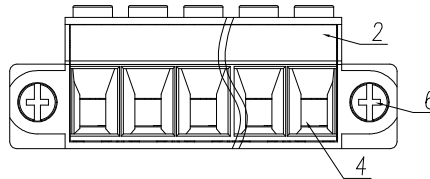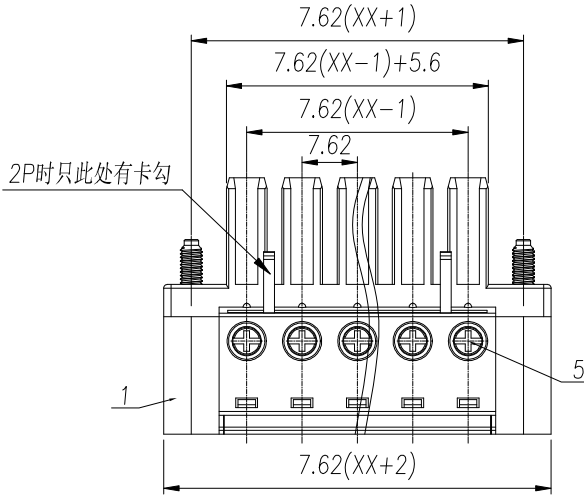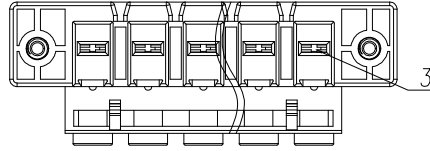

General Tolerances

								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

1

2

3

4

5

FOR-0371 Rev.1.0

UL/CUL 技术参数									
UL/CUL Technical Data									
等级	Use Group			B	C	D			
额定电压	Rated Voltage	[V]	300	-	300				
额定电流	Rated Current	[A]	41	-	10				
接线范围	Wire Range		24-8						
单/多芯线	Solid/Stranded	[AWG]							
耐电压	Withstanding Voltage		1600V/1Min						
IEC 技术参数					IEC61984				
IEC Technical Data									
过电压类别	Overvoltage Category		III	III	II				
污染等级	Contamination Class		3	2	2				
额定电压	Rated Voltage	[V]	1000	1000	1000				
额定电流	Rated Current	[A]	41	41	41				
额定冲击电压	Impulse withstand voltage		8.0	8.0	6.0				
导线截面积	Conductor cross section		0.2-6.0						
硬质/柔性导线	Solid/flexible	[mm²]							
一般参数		Other Data							
间距	Pitch /极数	Poles	[mm] / [P]	7.62 / 02~12					
剥线长度	Stripping Length		[mm]	10					
工作温度	Operating temperature		[°C]	-40~105					
符合RoHS环保要求									
6	Screw 2		Steel		M3/Zn Plated				
5	Screw 1		Steel		M3/Zn Plated				
4	Cage		Copper Alloy		M3/Ni Plated				
3	Clamp		Copper Alloy		Sn Plated				
2	Cover		PA66		UL94V-0				
1	Housing		PA66		UL94V-0				
ITEM	NAME OF PART		MATERIAL		NOTES				

DES.	YuCZ	DATE	23.11.27	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	23.11.27	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.27	SCALE	1:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ3EDGKHM-7.62-XXP-1Y-00A	