





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

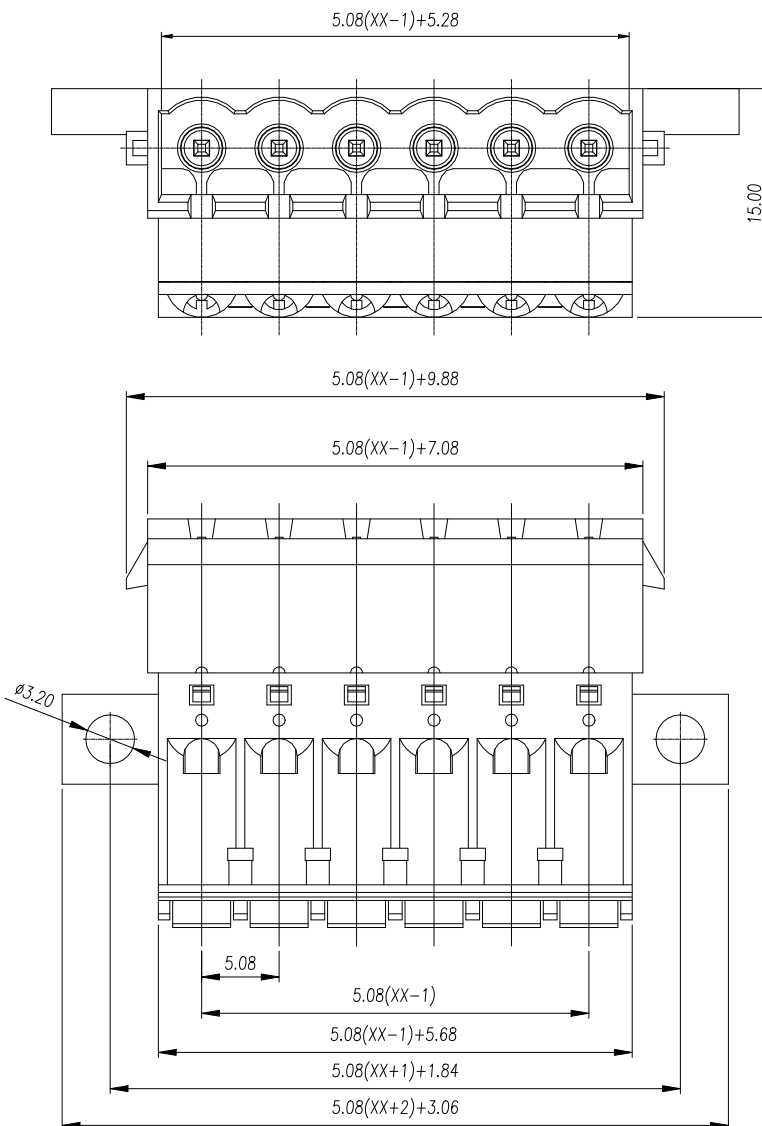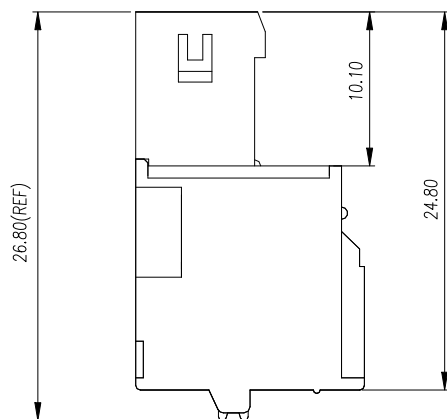

UL/CUL 技术参数	UL/CUL Technical Data				UL US	
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	10	-	10	
接线范围	Wire Range		28-12			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数	IEC Technical Data					IEC61984
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	320	320	630	
额定电流	Rated Current	[A]	12	12	12	
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0	
导线截面积	Conductor cross section		0.2-2.5			
硬质/柔性导线	Solid/flexible	[mm ²]				
材料	Material					
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflammability		UL94V-0			
导体材料	Contact Material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀锡 Sn Plated			
一般参数	Other Data					
间距	Pitch / 极数 Poles	[mm] / [P]	5.08 / 02-20			
剥线长度	Stripping Length	[mm]	7~8			
螺丝	Screw/扭矩 Torque(Max)	[N.m]	-			
工作温度	Operating temperature	[°C]	-40~105			
焊锡温度	Soldering temperature		-			
引脚尺寸	Pin Dimensions	[mm]	-			
PCB板孔径	PCB Hole Diameter	[mm]	-			

linear dimension(Tolerances Standard GB/T 14486-2008)




variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 2:1



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

第三视角/THIRD ANGLE PROJECTION 版本 / REV V0



名称 / TITLE WJ2EDGKDRG-5.08-XXP-1Y-100A