
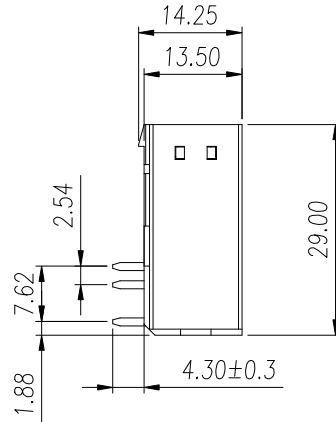
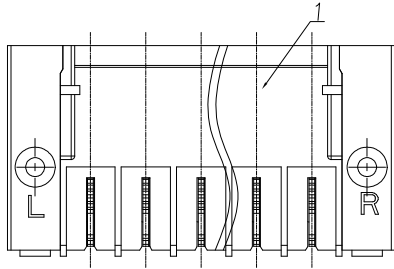

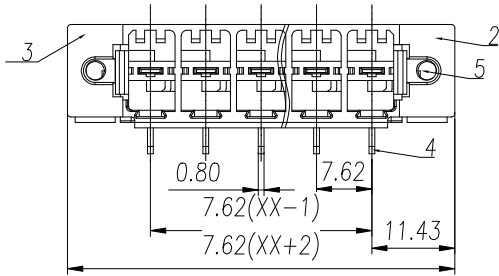


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。采用新型和外观专利的所有权利。

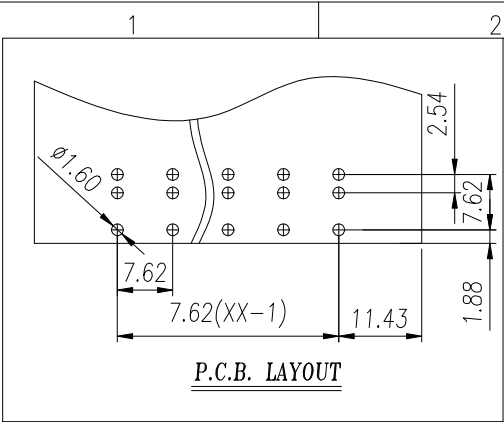

General Tolerances								—	▤	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.11.27

UL/CUL 技术参数			
UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	41	41	10
接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-		
耐电压 Withstanding Voltage	1600V/1Min		

IEC 技术参数	IEC61984		
IEC Technical Data			
过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	630	630	1000
额定电流 Rated Current [A]	41	41	41
额定冲击电压 Impulse withstand voltage [KV]	6	6	6

导线截面积	Conductor cross section	
硬质/柔性导线	Solid/ flexible [mm²]	-
一般参数 Other Data		
间距	Pitch [mm]	7.62
极数	Poles [P]	02~12P
工作温度	Operating temperature [°C]	-40~105
焊锡温度	Soldering temperature	260°C/5S
符合RoHS环保要求		

5	NUT	Copper Alloy	M3
4	PIN	Copper Alloy	Sn Plated
3	Left Housing	PA66	UL94V-0
2	Right Housing	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YuCZ	DATE	23.11.27	UNITS	mm	THIRD ANGLE PROJECTION	⊕
CHK.	YangHJ	DATE	23.11.27	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.27	SCALE	1:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ3EDGRRHM-7.62-XXP-1Y-00A	