

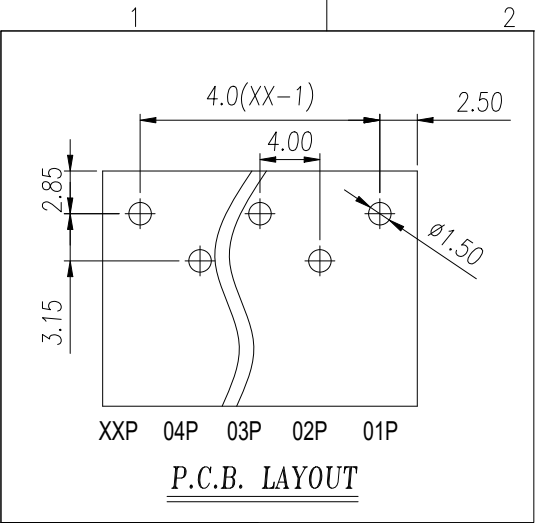


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除专利、实用新型、外观设计、复制、利用、交流本文件内容外，其他任何形式之复制、传播、利用、交流本文件内容均受法律保护，未经许可，不得转载、复制或传播。本公司保留对涉及发明、实用新型和外观设计的所有权利。

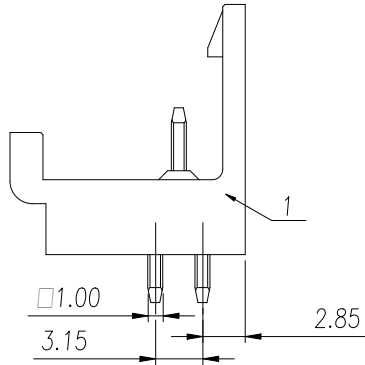

线数P	DIM A (mm)
2/3	4.0
4/5	8.0
6/7	12.0
8/9	16.0
10/11	20.0
12/13	24.0
14/15	28.0
16/17	32.0
18/19	36.0
20/21	40.0
22/23	44.0
24	48.0

General Tolerances								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

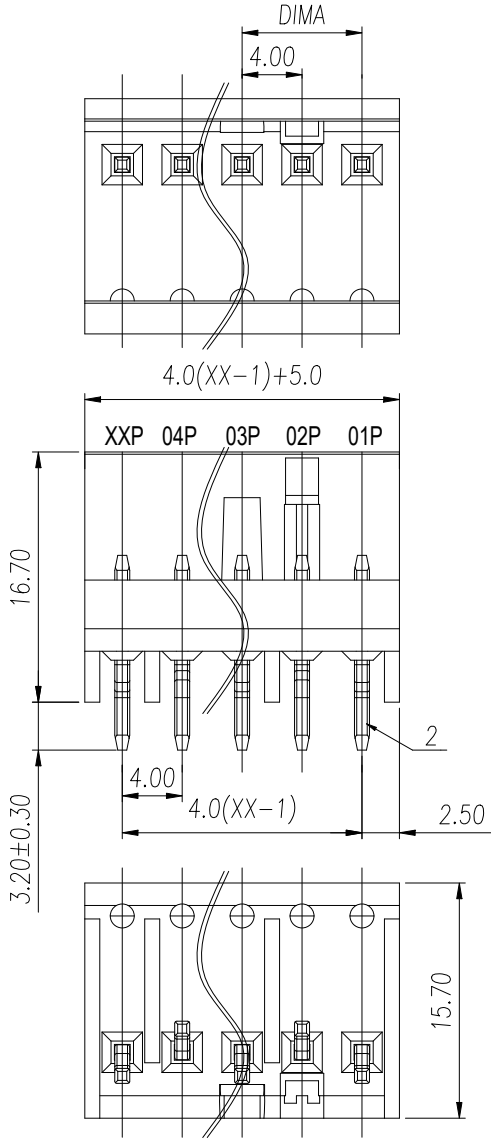

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	24.01.15

UL/CUL 技术参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	/	300
额定电流	Rated Current [A]	10	/	10
接线范围	Wire Range	/		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	17.5		
额定冲击电压	Impulse withstand voltage [KV]	4.0		
导线截面积	Conductor cross section	/		
硬卧/柔性导线	Solid/ flexible [mm²]			
一般参数 Other Data				
间距	Pitch [mm]	4.0		
极数	Poles [P]	02~24		
工作温度	Operating temperature [°C]	-40~105		
引针尺寸	Pin Dimensions [m.m]	1.0*1.0		
符合RoHS环保要求				
2	Pin	Copper Alloy	Sn Plated	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	

DES.	YuCZ	DATE	24.05.10	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	24.05.10	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	JASON	DATE	24.05.10	SCALE	2:1	DRAWING TYPE: SP-03	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ2EDGJ-4.0-XXP-1Y-00A	
						REV	V0