
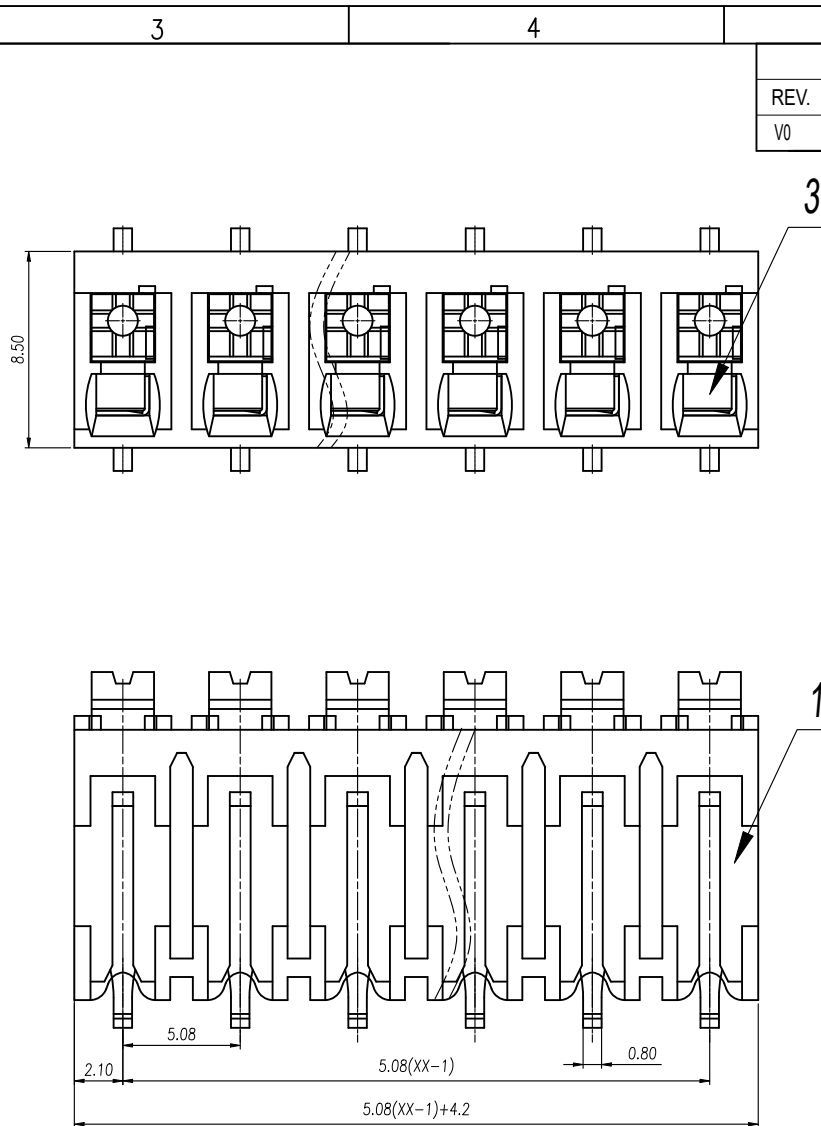
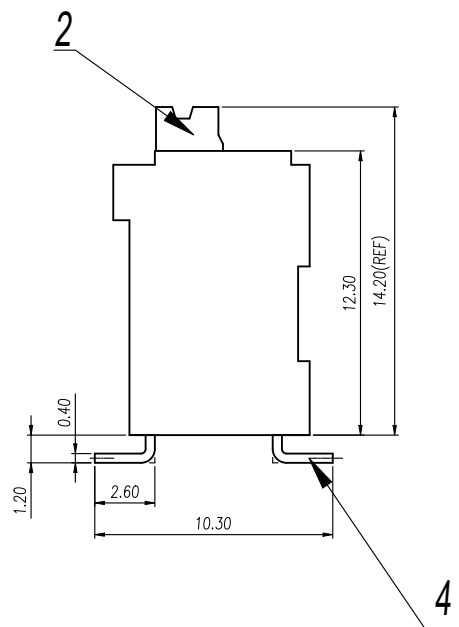


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经许可外，复制或传播本文件内容，或在本文件内容中涉及之发明、实用新型或外观设计的所有权利，均归本公司所有。未经本公司许可，擅自复制或传播本文件内容，或在本文件内容中涉及之发明、实用新型或外观设计的所有权利，均归本公司所有。

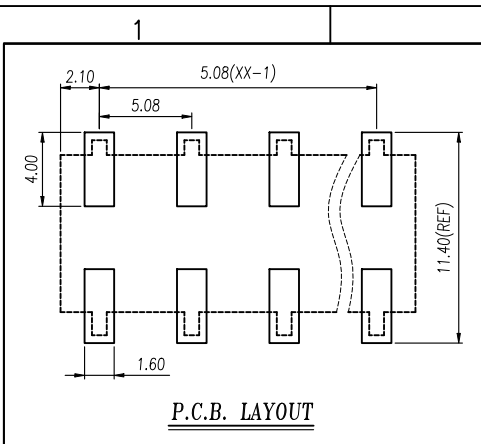

General Tolerances								—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

4	Pin header	Copper Alloy	Sn Plated
3	Spring	Stainless steel	/
2	Button	LCP	UL94V-0
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5					6										
REVISION RECORD															
REV.		ESCRPTION				ECN No.		APPROVED		DATE					
V0		新发行						Wubw		24.07.04					
3		UL/CUL 技术参数													
		UL/CUL Technical Data													
1		等 级 Use Group				B		C		D					
		额定电压 Rated Voltage [V]				300		-		300					
		额定电流 Rated Current [A]				10		-		10					
		接线范围 Wire Range				24-16									
		单/多芯线 Solid/Stranded [AWG]													
		耐电压 Withstanding Voltage				1600V/1Min									
		IEC 技术参数				IEC60947-7-4									
		IEC Technical Data													
		过电压类别 Overvoltage Category				III		III		II					
		污染等级 Contamination Class				3		2		2					
		额定电压 Rated Voltage [V]				250		320		500					
		额定电流 Rated Current [A]				17.5		17.5		17.5					
		额定冲击电压 Impulse withstand voltagea [KV]				4.0		4.0		4.0					
		导线截面积 Conductor cross section				0.2-1.5									
		硬质/柔性导线 Solid/ flexible [mm²]													
		材 料 Material													
		绝缘材料 Insulation Material				LCP									
		阻燃等级 Imflammability				UL94V-0									
		导体材料 Contactor Material				铜合金 Copper alloy									
		导体表面镀层 Contactive Coating				镀锡 Sn Plated									
		一般参数 Other Data													
		间距 Pitch /极数 Poles [mm] / [P]				5.08/2~24									
		工作温度 Operating temperatur [°C]				-40~105									
		剥线长度 Stripping Length [mm]				7~8									
		焊锡温度 Soldering temperature				285°C/5S									
		引针尺寸 Pin Dimensions [mm]				0.8*0.4									
		PCB板孔径 PCB Hole Diameter [mm]				-									
DES.		Wubw		DATE		24.07.04		UNITS		mm		THIRD ANGLE PROJECTION			
K.		HuHT		DATE		24.07.04		SIZE		A4		TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
P.		Jason		DATE		24.07.04		SCALE		2:1		DRAWING TYPE: SP-03		REV V0	
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD												PART NO.: WJ212VS-THR-5.08-XXP-1Y-00A			