

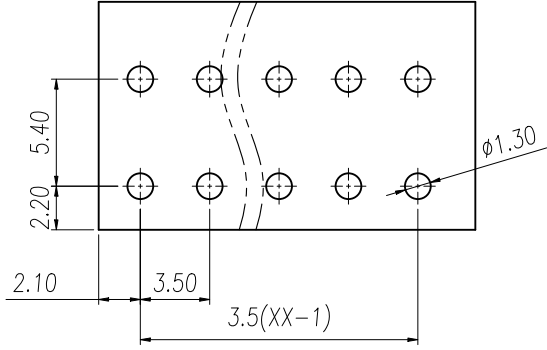
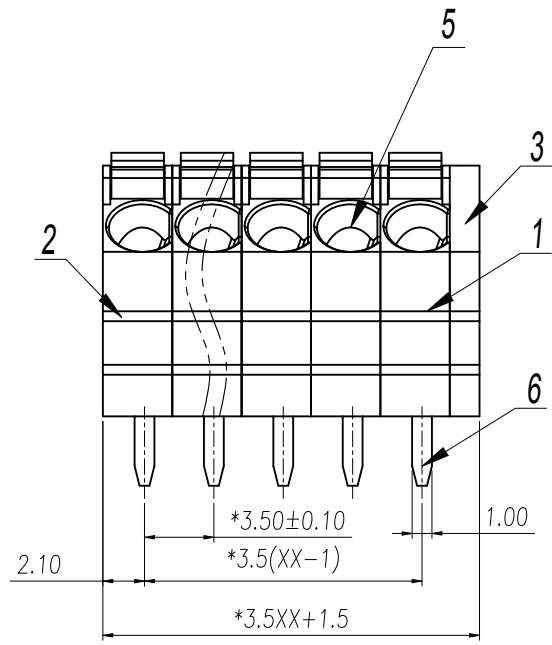


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权,否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

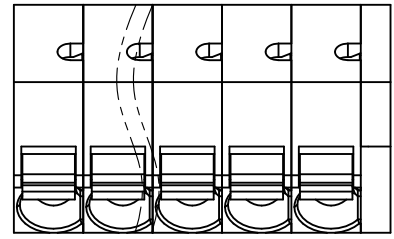

P.C.B. LAYOUT

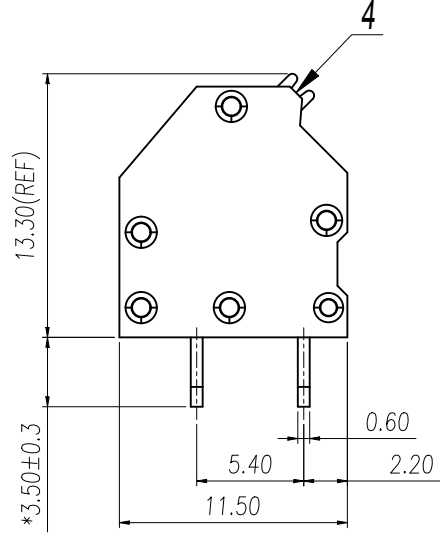

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

6	Pin Header	Copper Alloy	Sn Plated
5	Spring	Stainless steel	-
4	Button	POM	UL94V-HB
3	Cover	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	Wubw	DATE	24.07.05	UNITS	mm	THIRD ANGLE PROJECTION			
CHK.	HuHT	DATE	24.07.05	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1		
APP.	Jason	DATE	24.07.05	SCALE	2:1	DRAWING TYPE: SP-03	REV	V0	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.:	WJ252-3.5-XXP-1Y-00A		

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		Wubw	24.07.05

UL/CUL 技术参数		UL/CUL Technical Data			cUL [®] us	
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	10	-	10	
接线范围	Wire Range		28-16			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数		IEC60947-7-4				
IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	160	160	320	
额定电流	Rated Current	[A]	14	14	14	
额定冲击电压	Impulse withstand voltagea	[KV]	4.0	4.0	4.0	
导线截面积	Conductor cross section		0.2-1.5			
硬质/柔性导线	Solid/ flexible	[mm²]				
材料		Material				
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflammability		UL94V-0			
导体材料	Contactior Material		铜合金 Copper alloy			
导体镀层	Contactive Coating		镀锡 Sn Plated			
一般参数		Other Data				
间距	Pitch	[mm]	3.5			
极数	Poles	[P]	02~24			
剥线长度	Stripping Length	[mm]	8-9			
螺丝	Screw		-			
扭矩	Torque(Max)	[N.m]	-			
工作温度	Operating temperature	[°C]	-40~105			
引针尺寸	Pin Dimensions	[m.m]	0.6*1.0			
PCB板孔径	PCB Hole Diameter	[m.m]	Ø1.3			