

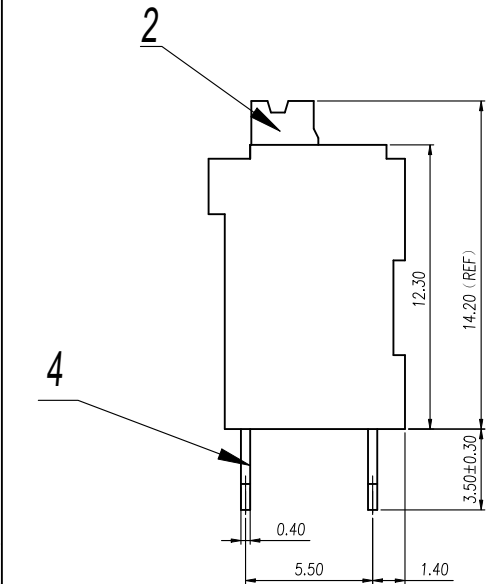
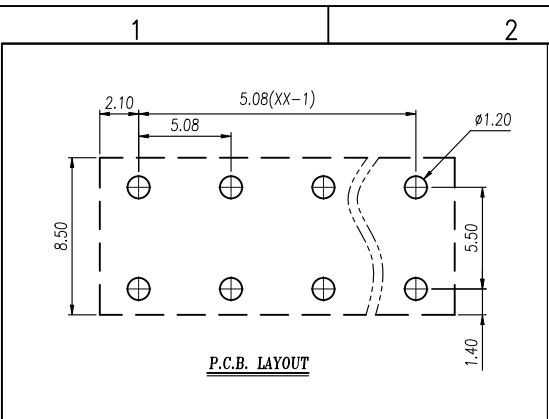


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经许可的翻印、复制或传播外，擅自复制或传播本文件内容，侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

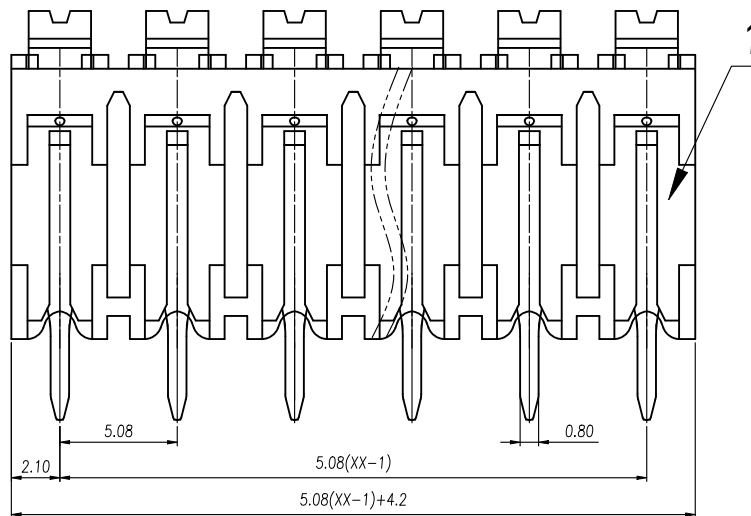

General Tolerances								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

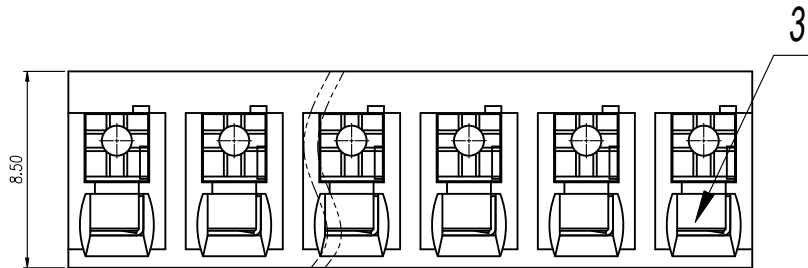

4	Pin header	Copper Alloy	Sn Plated
3	Spring	Stainless steel	/
2	Button	LCP	UL94V-0
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		Wubw	24.07.04
UL/CUL 技术参数 UL/CUL Technical Data		UL®us		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围	Wire Range	24-16		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数 IEC Technical Data		IEC60947-7-4		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltagea [KV]	4.0	4.0	4.0
导线截面积	Conductor cross section	0.2-1.5		
硬质/柔性导线	Solid/flexible [mm²]			
材料		Material		
绝缘材料	Insulation Material	LCP		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contactior Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数		Other Data		
间距	Pitch /极数 Poles [mm] / [P]	5.08/2~24		
工作温度	Operating temperatur [°C]	-40~105		
剥线长度	Stripping Length [mm]	7~8		
焊锡温度	Soldering temperature	285°C/5S		
引针尺寸	Pin Dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.2		
DES.	Wubw	DATE	24.07.04	UNITS mm
CHK.	HuHT	DATE	24.07.04	SIZE A4
APP.	Jason	DATE	24.07.04	SCALE 2:1
THIRD ANGLE PROJECTION		⊕		
TYPE: CUSTOMER DRAWING		SHEET 1 of 1		
DRAWING TYPE: SP-03		REV V0		
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		PART NO.: WJ212V-THR-5.08-XXP-1Y-00A		

1

2

3

4

5

FOR-0371 Rev.1.0