
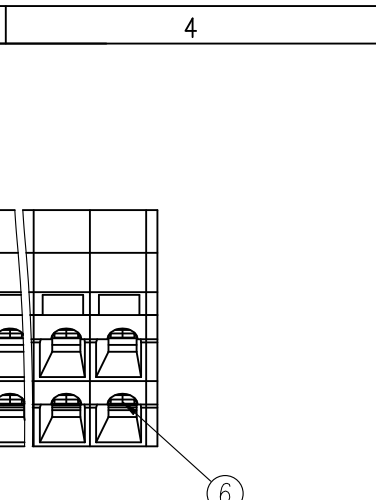
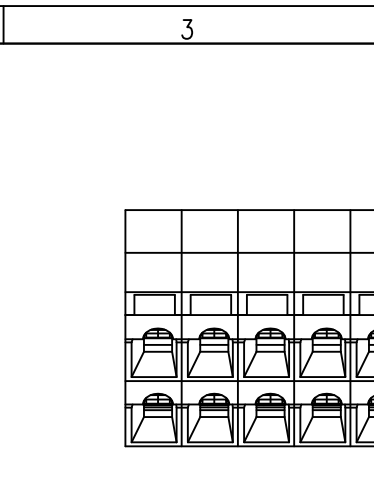


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经许可外，复制或传播本文件内容，或未经许可擅自使用本文件内容，均属于侵权行为。本公司保留对侵权行为的追诉权。

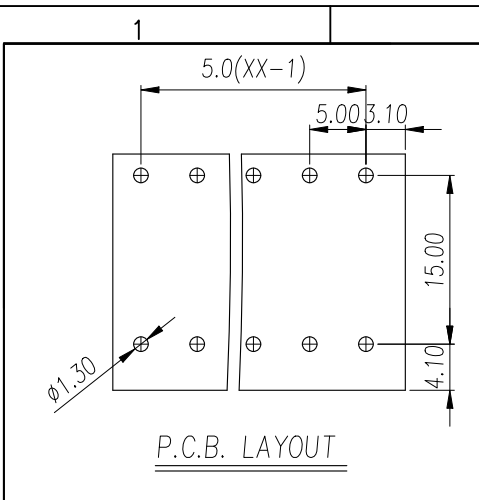

5				6			
REVISION RECORD							
REV.	ESCRPTION			ECN No.	APPROVED	DATE	
V0	新发行				WuBW	24.06.24	
UL/CUL 技术参数 UL/CUL Technical Data							
等 级		Use Group		B	C	D	
额定电压		Rated Voltage [V]		300	-	300	
额定电流		Rated Current [A]		10	-	10	
接线范围		Wire Range		28-12			
单/多芯线		Solid/Stranded [AWG]					
耐电压		Withstanding Voltage		1600V/1Min			
IEC 技术参数 IEC Technical Data				IEC60947-7-4			
过电压类别		Overvoltage Category		III	III	II	
污染等级		Contamination Class		3	2	2	
额定电压		Rated Voltage [V]		250	320	630	
额定电流		Rated Current [A]		21	21	21	
额定冲击电压		Impulse withstand voltagea [KV]		4.0	4.0	4.0	
导线截面积		Conductor cross section		0.2~2.5			
硬质/柔性导线		Solid/ flexible [mm²]					
材 料 Material							
绝缘材料		Insulation Material		PA66			
阻燃等级		Imflammability		UL94V-0			
导体材料		Contactor Material		铜合金 Copper alloy			
导体表面镀层		Contactive Coating		镀锡 Sn Plated			
一般参数 Other Data							
间距 Pitch /极数		Poles [mm] / [P]		5.0/ 2*2~2*24			
工作温度		Operating temperatur [°C]		-40~105			
剥线长度		Stripping Length [mm]		5~6			
焊锡温度		Soldering temperature		260°C/5S			
引针尺寸		Pin Dimensions [mm]		0.7*0.7			
PCB板孔径		PCB Hole Diameter [mm]		Ø1.3			
DES.	WuBW	DATE	24.06.24	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.06.24	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	Jason	DATE	24.06.24	SCALE	2:1	DRAWING TYPE: SP-03	
						REV	V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ245T2-5.0-2*XXP-1Y-00A		

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60