
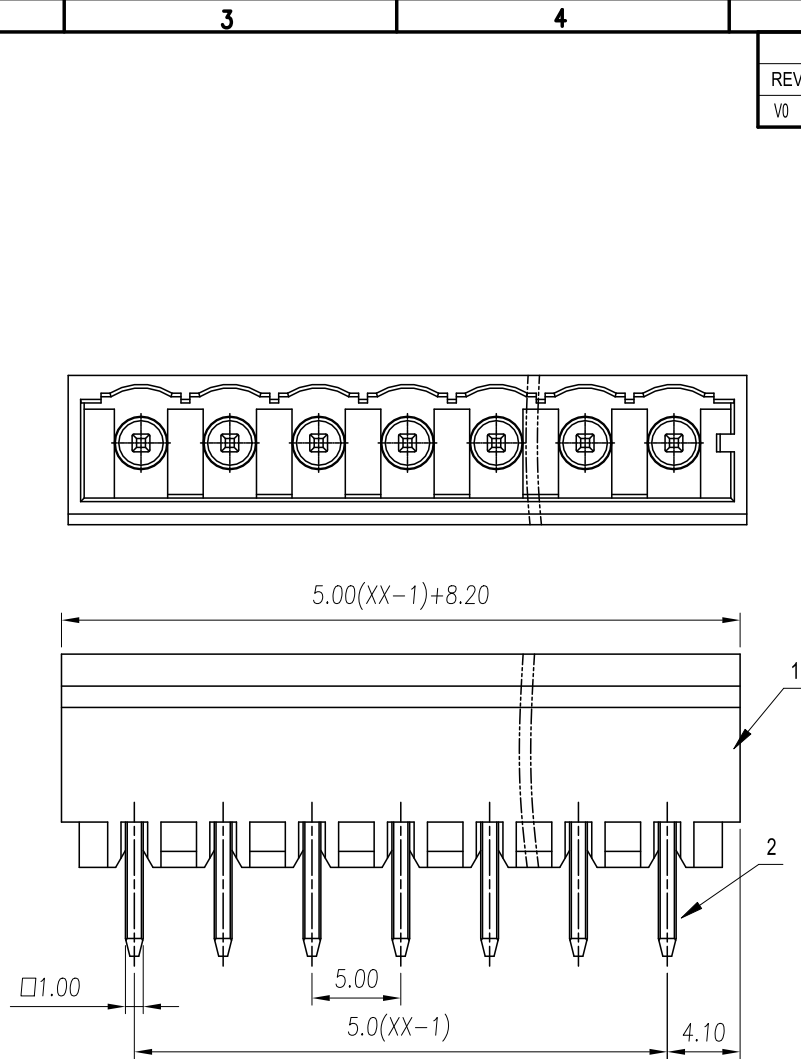
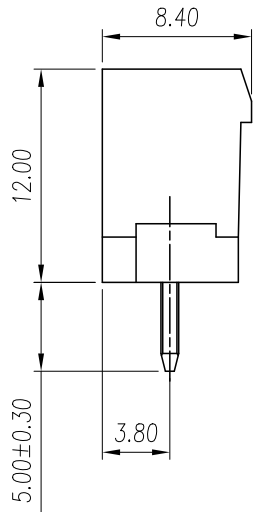


Transfer or duplication of this document or part or its contents or provision of information of its contents on printed matter without authorization is prohibited. Violation of this rule for compensation. All rights reserved for patent, utility model or design registrations. 本文件及图样之内容，未经许可，不得复制或传播。本公司保留所有权利。 未经授权，不得复制或传播。 侵权必究。

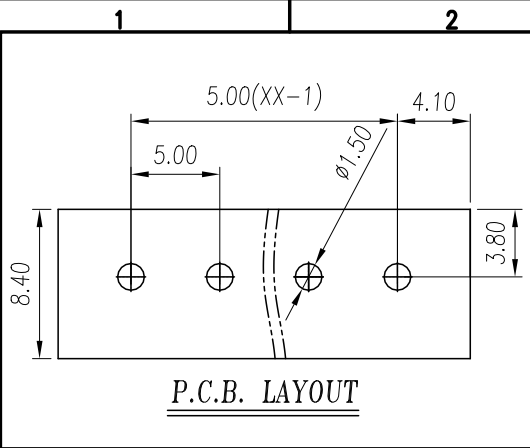

General Tolerances								— □ ⊥		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

2	Pin header	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5		REVISION RECORD				6	
REV.	ESCRIPTION		ECN No.	APPROVED	DATE		
V0	新发行			ZhaoXY	24.01.23		
UL/CUL 技术参数 UL/CUL Technical Data			UL US				
等 级 Use Group			B	C	D		
额定电压 Rated Voltage [V]			300	-	300		
额定电流 Rated Current [A]			15	-	10		
接线范围 Wire Range			/				
单/多芯线 Solid/Stranded [AWG]							
耐电压 Withstanding Voltage			1600V/1Min				
IEC 技术参数 IEC Technical Data			IEC61984				
过电压类别 Overvoltage Category			III	III	II		
污染等级 Contamination Class			3	2	2		
额定电压 Rated Voltage [V]			320	320	630		
额定电流 Rated Current [A]			12	12	12		
额定冲击电压 Impulse withstand voltagea [KV]			4	4	4		
导线截面积 Conductor cross section			/				
硬质/柔性导线 Solid/ flexible [mm²]							
材 料 Material							
绝缘材料 Insulation Material			PA66				
阻燃等级 Imflammability			UL94V-0				
导体材料 Contactor Material			铜合金 Copper alloy				
导体表面镀层 Contactive Coating			镀锡 Sn Plated				
一般参数 Other Data							
间距 Pitch /极数 Poles [mm] / [P]			5.0 / 02~24				
工作温度 Operating temperatur [°C]			-40~105				
焊锡温度 Soldering temperature			260°/5S				
引针尺寸 Pin Dimensions [mm]			1.0*1.0				
PCB板孔径 PCB Hole Diameter [mm]			φ1.5				
ZhaoXY	DATE	24.01.23	UNITS	mm	THIRD ANGLE PROJECTION		
HuHT	DATE	24.01.23	SIZE	A4	TYPE: CUSTOMER DRAWING		
Jason	DATE	24.01.23	SCALE	2:1	DRAWING TYPE: SP-03		
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ0402-01XX-1Y-00A		