

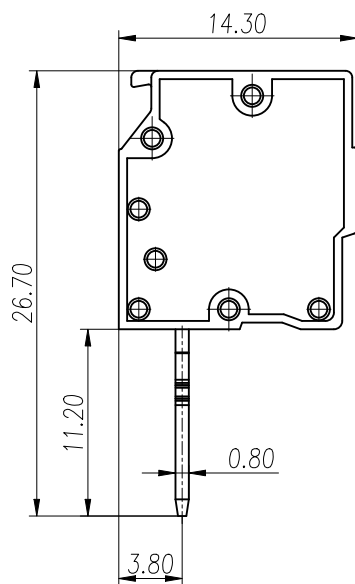
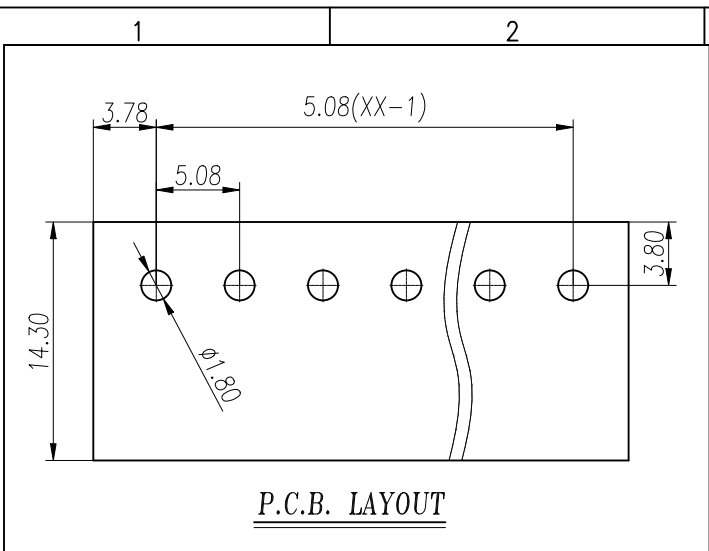



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容。 侵犯者将承担赔偿责任。 本公司保留对专利及发明、实用新型和外观设计的所有权利。

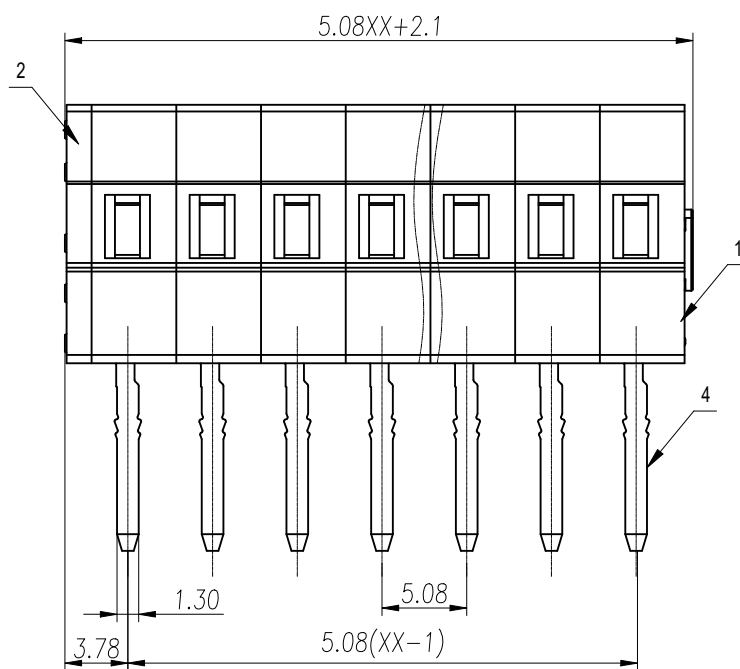

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

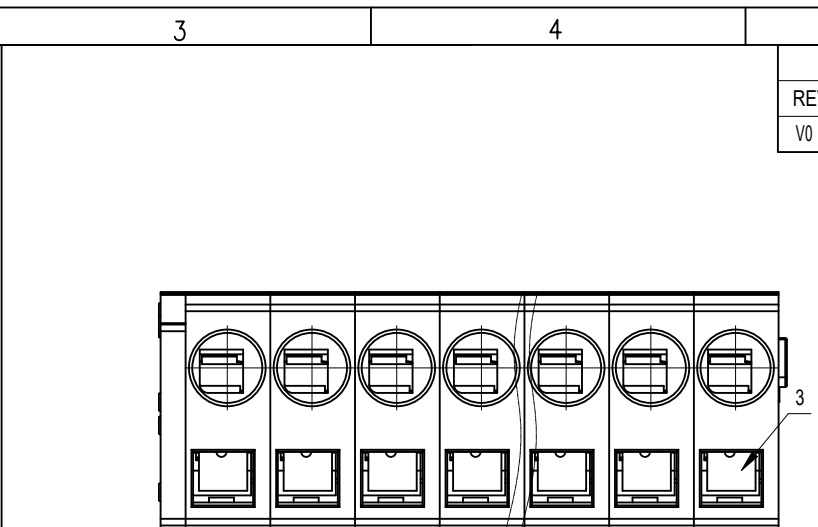

4	Pin header	Copper Alloy	Sn Plated
3	Spring	Stainless steel	/
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5					6							
REVISION RECORD												
REV.		ESCRPTION			ECN No.		APPROVED		DATE			
V0		新发行					WangZF		24.12.05			
		UL/CUL 技术参数										
		UL/CUL Technical Data										
		等 级		Use Group		B		C		D		
		额定电压		Rated Voltage		[V]		300		-		300
		额定电流		Rated Current		[A]		15		-		10
		接线范围		Wire Range		28-12						
		单/多芯线		Solid/Stranded								[AWG]
		耐电压		Withstanding Voltage		1600V/1Min						
		IEC 技术参数			IEC61984							
		IEC Technical Data										
		过电压类别		Overvoltage Category		III		III		II		
		污染等级		Contamination Class		3		2		2		
		额定电压		Rated Voltage		[V]		320		320		630
		额定电流		Rated Current		[A]		12		12		12
		额定冲击电压		Impulse withstand voltagea		[KV]		4		4		4
		导线截面积		Conductor cross section		0.25-2.5						
		硬质/柔性导线		Solid/ flexible								[mm²]
		材 料			Material							
绝缘材料		Insulation Material		PA66								
阻燃等级		Imflammability		UL94V-0								
导体材料		Contactor Material		铜合金 Copper alloy								
导体表面镀层		Contactive Coating		镀锡 Sn Plated								
一般参数			Other Data									
间距 Pitch /极数		Poles		[mm] / [P]		5.08 / 02~24						
工作温度		Operating temperatur		[°C]		-40~105						
剥线长度		Stripping Length		[mm]		8-9						
焊锡温度		Soldering temperature		260°C/5S								
引针尺寸		Pin Dimensions		[mm]		1.3*0.8						
PCB板孔径		PCB Hole Diameter		[mm]		Ø1.8						
WangZF		DATE	24.12.05	UNITS	mm	THIRD ANGLE PROJECTION						
HuHT		DATE	24.12.05	SIZE	A4	TYPE: CUSTOMER DRAWING			SHEET 1 of 1			
Jason		DATE	24.12.05	SCALE	2:1	DRAWING TYPE: SP-03			REV V0			
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ0504-01XX-1Y-00A						



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO.,LTD

PART NO.:
WJ0504-01XX-1Y-00A