

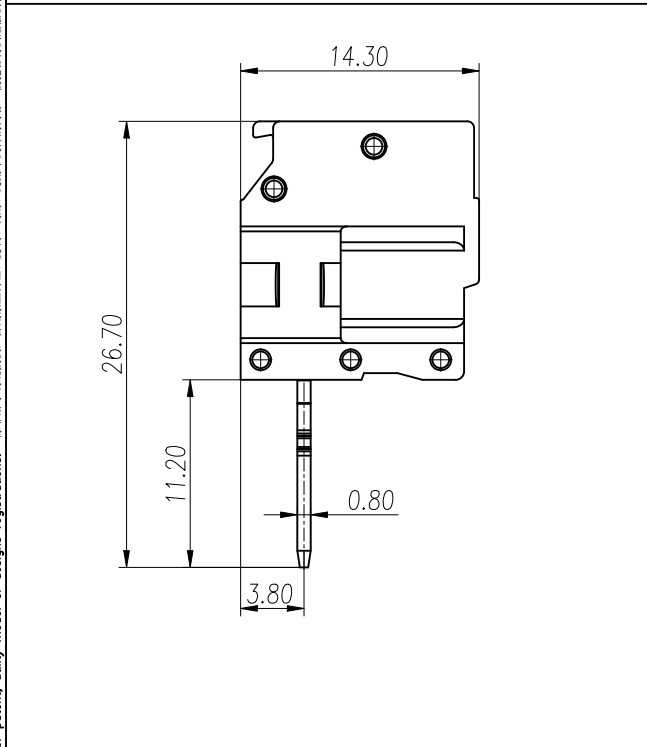



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担赔偿责任。 本公司保留对专利及发明、实用新型和外观设计的所有权利。

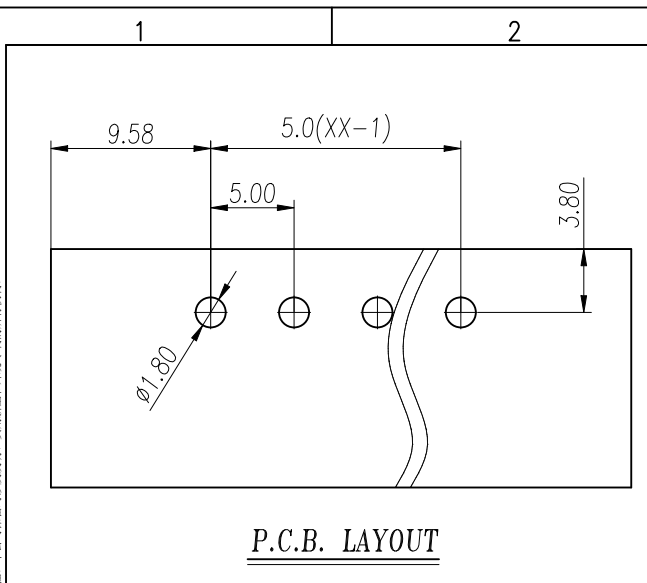

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

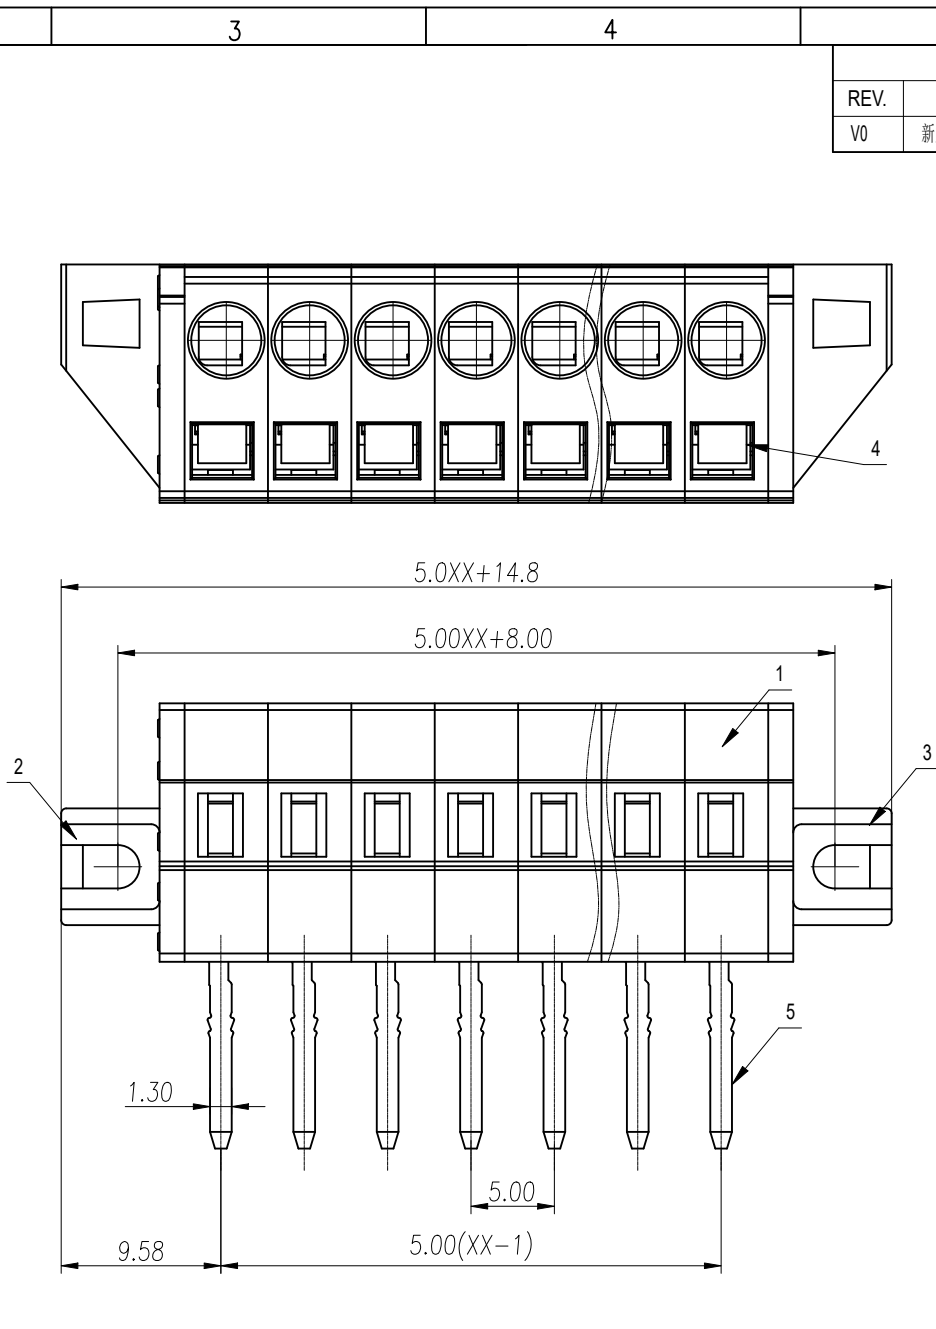

5	Pin header	Copper Alloy	Sn Plated
4	Spring	Stainless steel	/
3	Cover2	PA66	UL94V-0
2	Cover1	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5					6									
REVISION RECORD														
REV.	ESCRPTION				ECN No.		APPROVED	DATE						
V0	新发行						WangZF	24.12.05						
					UL/CUL 技术参数 UL/CUL Technical Data									
					等 级 Use Group		B		C		D			
					额定电压 Rated Voltage [V]		300		-		300			
					额定电流 Rated Current [A]		15		-		10			
					接线范围 Wire Range		28-12							
					单/多芯线 Solid/Stranded [AWG]									
					耐电压 Withstanding Voltage		1600V/1Min							
					IEC 技术参数 IEC Technical Data					IEC61984				
					过电压类别 Overvoltage Category		III		III		II			
					污染等级 Contamination Class		3		2		2			
额定电压 Rated Voltage [V]		320		320		630								
额定电流 Rated Current [A]		12		12		12								
额定冲击电压 Impulse withstand voltagea [KV]		4		4		4								
导线截面积 Conductor cross section		0.25-2.5												
硬质/柔性导线 Solid/ flexible [mm²]														
材 料 Material														
绝缘材料 Insulation Material		PA66												
阻燃等级 Imflammability		UL94V-0												
导体材料 Contactor Material		铜合金 Copper alloy												
导体表面镀层 Contactive Coating		镀锡 Sn Plated												
一般参数 Other Data														
间距 Pitch /极数 Poles [mm] / [P]		5.0 / 02~24												
工作温度 Operating temperatur [°C]		-40~105												
剥线长度 Stripping Length [mm]		8-9												
焊锡温度 Soldering temperature		260°C/5S												
引针尺寸 Pin Dimensions [mm]		1.3*0.8												
PCB板孔径 PCB Hole Diameter [mm]		Ø1.8												
WangZF	DATE	24.12.05	UNITS	mm	THIRD ANGLE PROJECTION									
HuHT	DATE	24.12.05	SIZE	A4	TYPE: CUSTOMER DRAWING				SHEET 1 of 1					
Jason	DATE	24.12.05	SCALE	2:1	DRAWING TYPE: SP-03				REV	V0				
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ0404-03XX-1Y-00A									

THIRD ANGLE PROJECTION

TYPE: CUSTOMER DRAWING

DRAWING TYPE: SP-03

REV V0

1

2

3

4

5

FOR-0371 Rev.1.0