

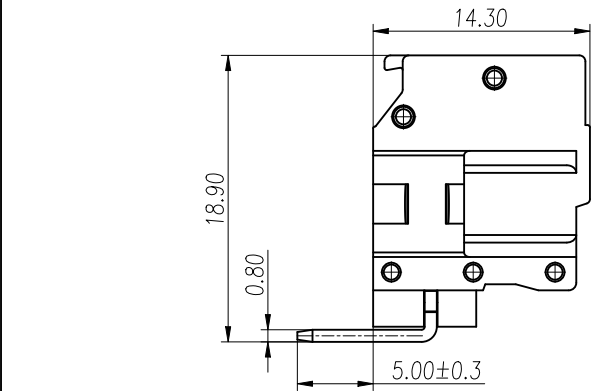


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权,否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担赔偿责任。本公司保留对专利及发明、实用新型和外观设计的所有权利。

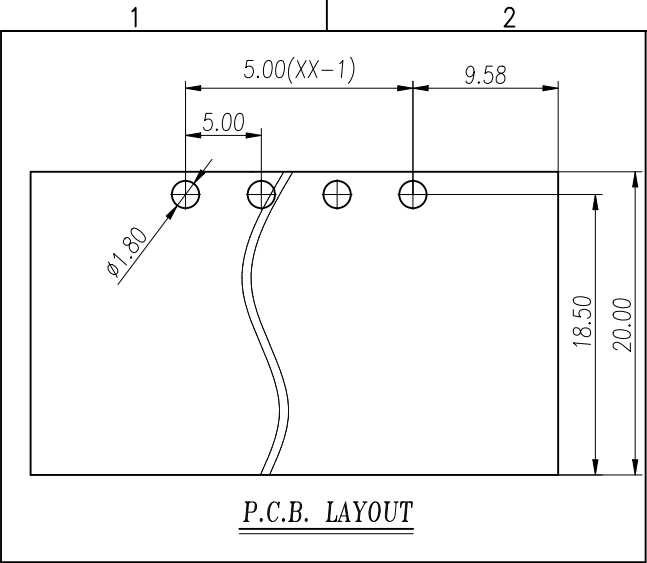

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

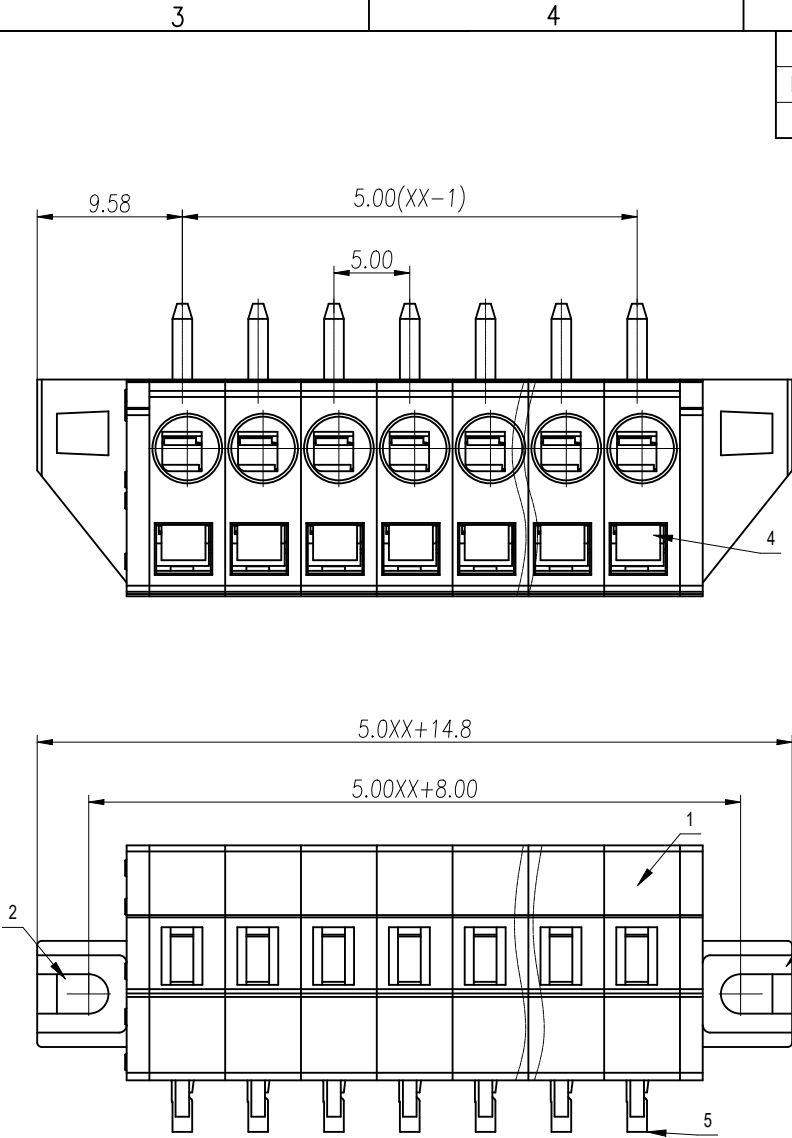

5					6				
REVISION RECORD									
REV.	ESCRIPTION				ECN No.	APPROVED		DATE	
V0	新发行					WangZF		24.12.05	
UL/CUL 技术参数 UL/CUL Technical Data 等 级 Use Group 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG] 耐电压 Withstanding Voltage IEC 技术参数 IEC Technical Data 过电压类别 Overvoltage Category 污染等级 Contamination Class 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 额定冲击电压 Impulse withstand voltagea [KV] 导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²] 材 料 Material 绝缘材料 Insulation Material 阻燃等级 Imflammability 导体材料 Contactor Material 导体表面镀层 Contactive Coating 一般参数 Other Data 间距 Pitch /极数 Poles [mm]/[P] 工作温度 Operating temperatur [°C] 剥线长度 Stripping Length [mm] 焊锡温度 Soldering temperature 引针尺寸 Pin Dimensions [mm] PCB板孔径 PCB Hole Diameter [mm]					UL®us B C D 300 - 300 15 - 10 28-12 1600V/1Min IEC61984 III III II 3 2 2 320 320 630 12 12 12 4 4 4 0.25-2.5 PA66 UL94V-0 铜合金 Copper alloy 镀锡 Sn Plated 5.0 / 02~24 -40~105 8-9 260°C/5S 1.3*0.8 Ø1.8				