


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经许可，否则不得复制或传播本文件内容。未经许可，擅自复制或传播本文件内容，将承担法律责任。本公司保留对专利及发明、实用新型和外观设计的所有权利。

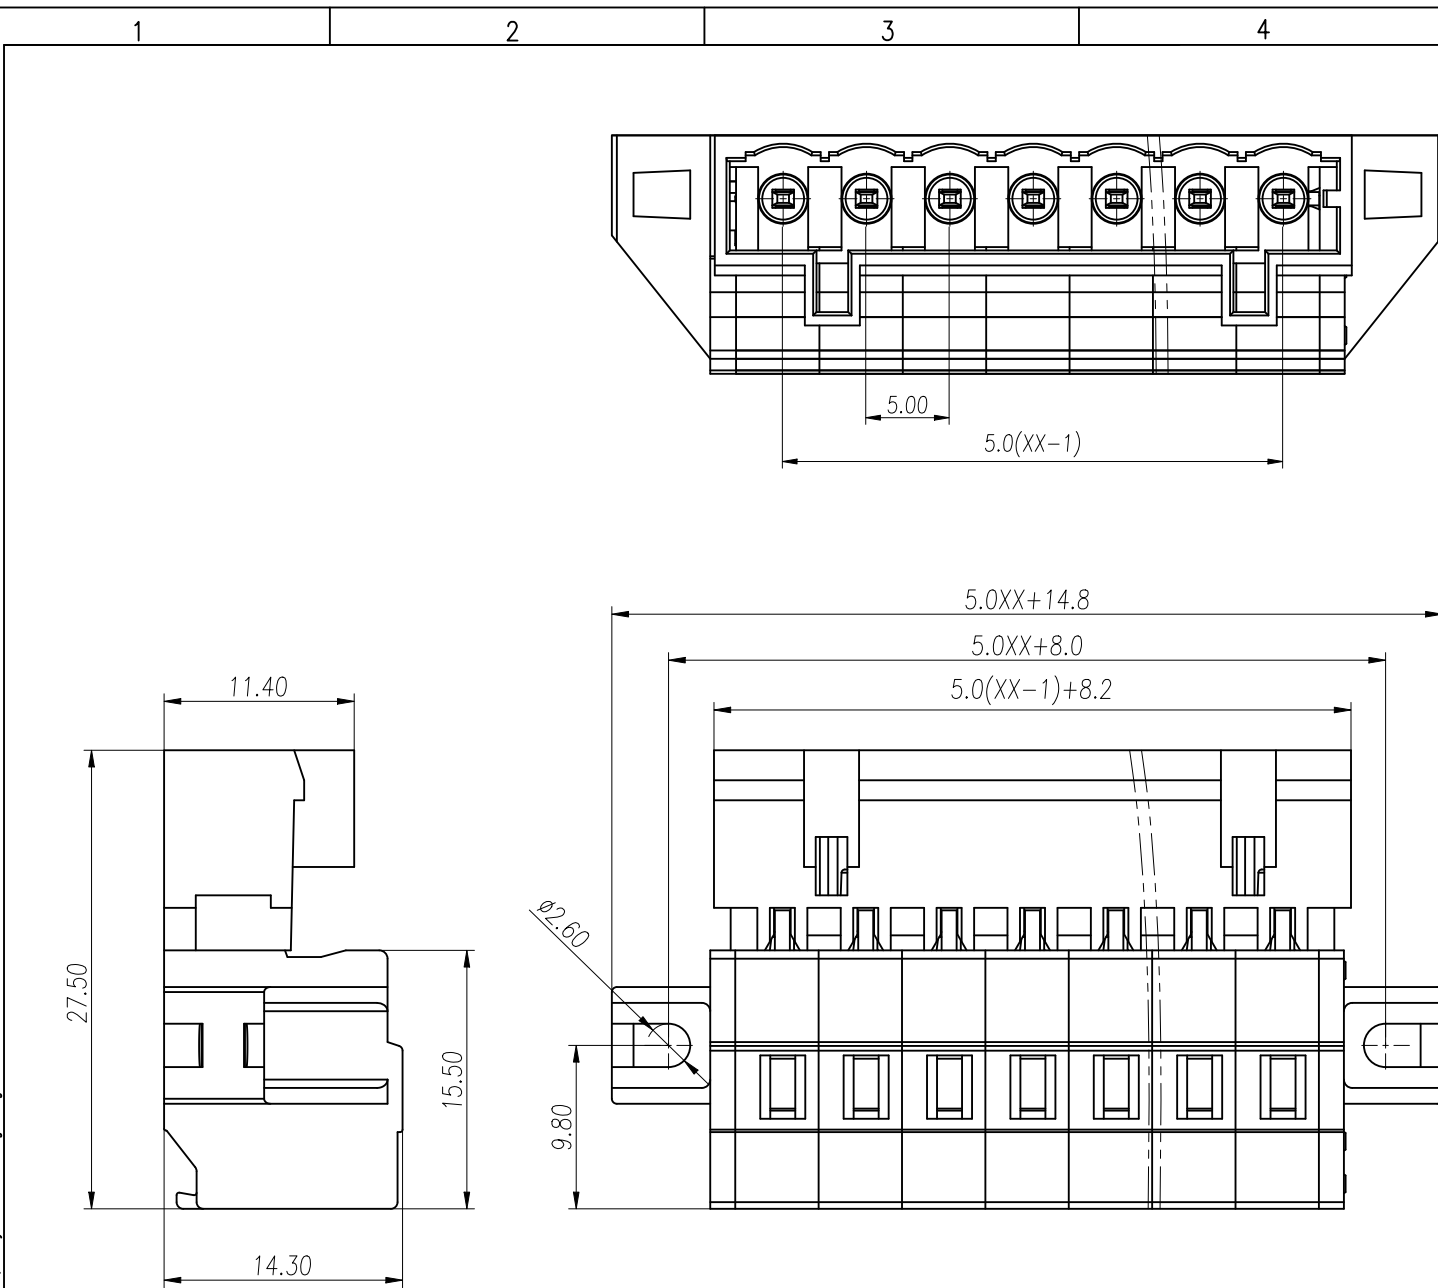

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

6	Pin header	Copper Alloy	Sn Plated
5	Spring	Stainless steel	/
4	Cover2	PA66	UL94V-0
3	Cover1	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5					6				
REVISION RECORD									
REV.	ESCRPTION				ECN No.	APPROVED		DATE	
V0	新发行					WangZF		24.12.05	
UL/CUL 技术参数 UL/CUL Technical Data									
等 级		Use Group			B	C	D		
额定电压		Rated Voltage [V]			300	-	300		
额定电流		Rated Current [A]			15	-	10		
接线范围		Wire Range			28-12				
单/多芯线		Solid/Stranded [AWG]							
耐电压		Withstanding Voltage			1600V/1Min				
IEC 技术参数 IEC Technical Data					IEC61984				
过电压类别		Overvoltage Category			III	III	II		
污染等级		Contamination Class			3	2	2		
额定电压		Rated Voltage [V]			320	320	630		
额定电流		Rated Current [A]			12	12	12		
额定冲击电压		Impulse withstand voltagea [KV]			4	4	4		
导线截面积		Conductor cross section			0.25-2.5				
硬质/柔性导线		Solid/ flexible [mm²]							
材 料					Material				
绝缘材料		Insulation Material			PA66				
阻燃等级		Imflammability			UL94V-0				
导体材料		Contactor Material			铜合金 Copper alloy				
导体表面镀层		Contactive Coating			镀锡 Sn Plated				
一般参数					Other Data				
间距		Pitch / 极数		Poles [mm] / [P]	5.0 / 02~24				
工作温度		Operating temperatur [°C]			-40~105				
剥线长度		Stripping Length [mm]			8-9				

WangZF	DATE	24.12.05	UNITS	mm	THIRD ANGLE PROJECTION		
HuHT	DATE	24.12.05	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1
Jason	DATE	24.12.05	SCALE	2:1	DRAWING TYPE: SP-03		REV V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ0403-06XX-1Y-00A		
FOR-0371 Rev.1.0							