

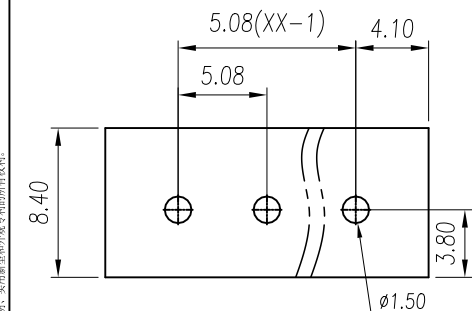
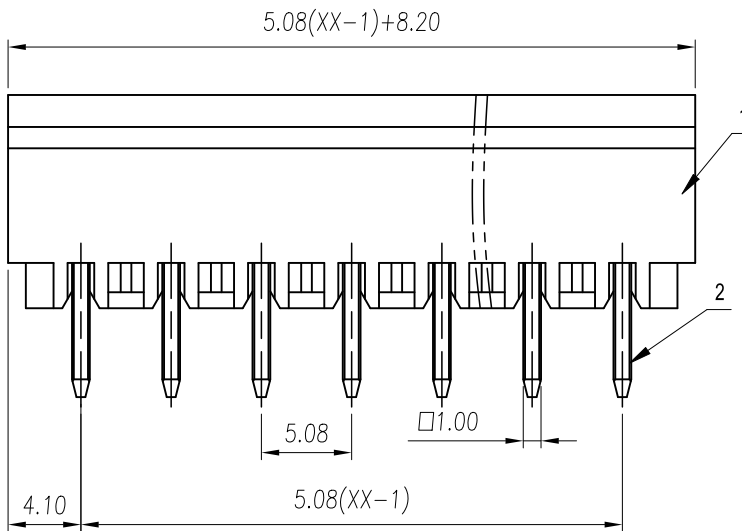


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经书面许可，任何复制或传播本文件内容均属于侵权行为。本公司保留所有权利。未经许可，不得复制或传播本文件内容。本公司保留所有权利。

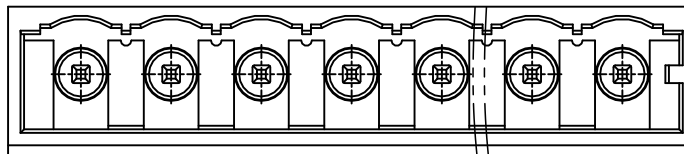

P.C.B. LAYOUT

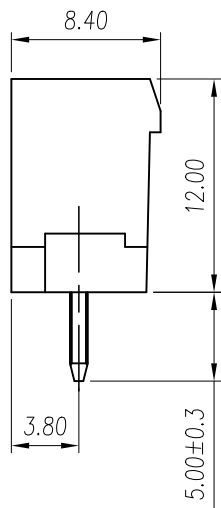

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

2	Pin header	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.01.23	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.01.23	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.01.23	SCALE	2:1	DRAWING TYPE: SP-03	REV V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ0502-01XX-1Y-00A

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.01.23

UL/CUL 技术参数

UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range	/		
单/多芯线	Solid/Stranded [AWG]	/		
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数

IEC Technical Data

IEC61984

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltagea [KV]	4	4	4

导线截面积	Conductor cross section	/		
硬质/柔性导线	Solid/flexible [mm ²]	/		

材料 Material

绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contactor Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		

一般参数 Other Data

间距 Pitch /极数 Poles	[mm] / [P]	5.08 / 02~24		
工作温度	Operating temperatur [°C]	-40~105		
焊锡温度	Soldering temperature	260°/5S		
引脚尺寸	Pin Dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	1.5		