

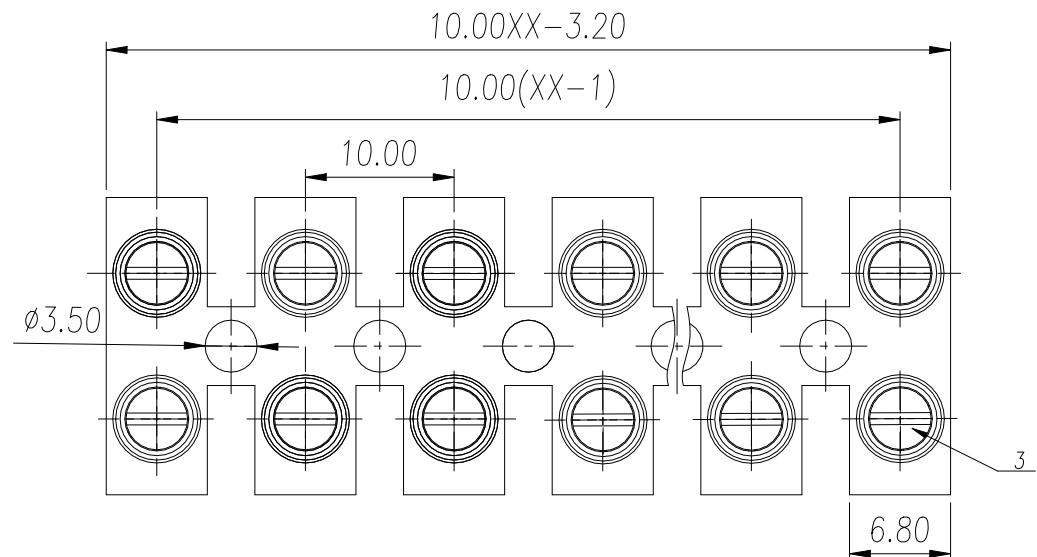


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	23.10.12

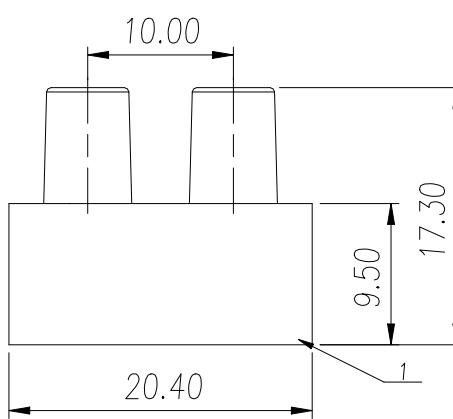

额定电压/ Rated voltage	300V	450V
额定电流/ Rated current	30A	24A
接触电阻/ Contact resistance	20mΩ	
绝缘电阻/ Insulation resistance	500MΩ/DC500V	
使用线径/ Wire range	20~10AWG	2.5mm²
耐电压/ Wrth standing voltage	AC 1600V/1 Min	
机械性能/ Mechanical		
扭矩/Torque	0.5Nm(4.5Lb.in)	
温度范围/ Temp. Range	-40°C~+105°C	
剥线长度/ Strip Length	7-8mm	
尺寸/ Dimensions		
间距/ Pitch	10.0mm	
极数/ Poles	2~12p	

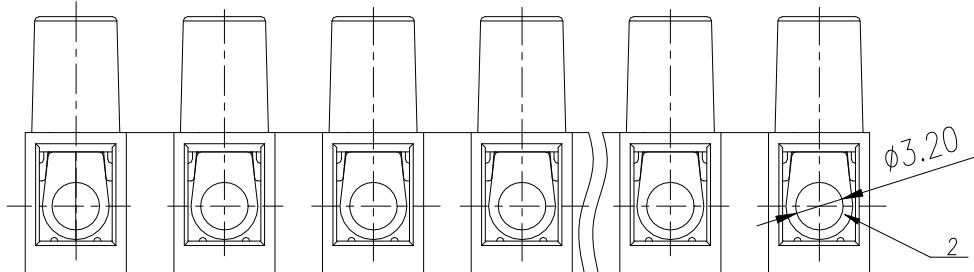

General Tolerances

variable range	to	— □ ⊥									
		over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

ITEM	NAME OF PART	MATERIAL	NOTES	DES.	WangP	DATE	23.10.12	UNITS	mm	THIRD ANGLE PROJECTION	REV	HEET 1 of 1
3	Screw	Steel	M3	CHK.	YangHJ	DATE	23.10.12	SIZE	A4	TYPE: CUSTOMER DRAWING		
2	Cage	Copper Alloy	M3/Ni Plated	APP.	JASON	DATE	23.10.12	SCALE	2:1	DRAWING TYPE: SP-03	REV	V0
1	Housing	PA66	UL94V-2									
				WANJIE	慈溪市万捷电子有限公司		CIXI WANJIE ELECTRONIC CO., LTD		PART NO.: MY10H-1.2-10.0-XXP-1Y-00A			