
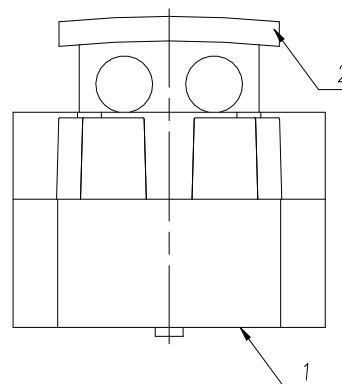


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。

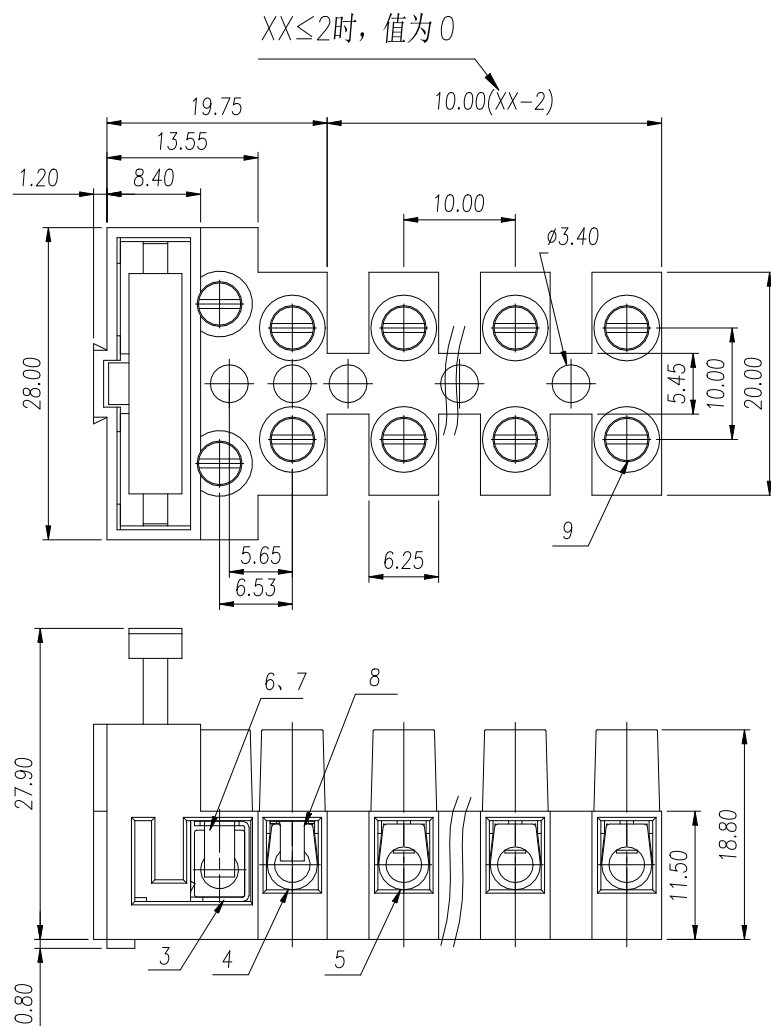

9	Screw	Steel	M3
8	Spring	Stainless Steel	
7	Spring	Copper Alloy	Ni Plated
6	Spring	Copper Alloy	Ni Plated
5	Cage	Copper Alloy	M3/Ni Plated
4	Cage	Copper Alloy	M3/Ni Plated
3	Cage	Copper Alloy	M3/Ni Plated
2	Button	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REV.		DESCRIPTION		ECN No.		APPROVED		DATE	
V0		新发行				WangP		23.10.19	

参考标准/ Standard	UL
额定电压/ Rated voltage	300V
额定电流/ Rated current	15A
接触电阻/ Contact resistance	20mΩ
绝缘电阻/ Insulation resistance	500MΩ/DC500V
使用线径/ Wire range	22~14AWG
耐 电 压/ Wrth standing voltage	AC 1600V/1 Min
机 械 性 能/ Mechanical	
扭矩/ Torque	0.5Nm(4.5Lb.in)
温度范围/ Temp.Range	-40°C~+105°C
瞬间温度/ Temp.Range	+260°C 5Sec
剥线长度/ Steip Length	7-8mm
尺 寸/ Dimensions	
间 距/ Pitch	10.0mm
极 数/ Poles	02~05p

S.	WangP	DATE	23.10.19	UNITS	mm	THIRD ANGLE PROJECTION		
K.	YangHJ	DATE	23.10.19	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
P.	JASON	DATE	23.10.19	SCALE	1.5:1	DRAWING TYPE: SP-03	REV	V0

	慈溪市万捷电子有限公司	PART NO.: MY510-XXP-1Y-00A
	CIXI WANJIE ELECTRONIC CO., LTD	

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60