
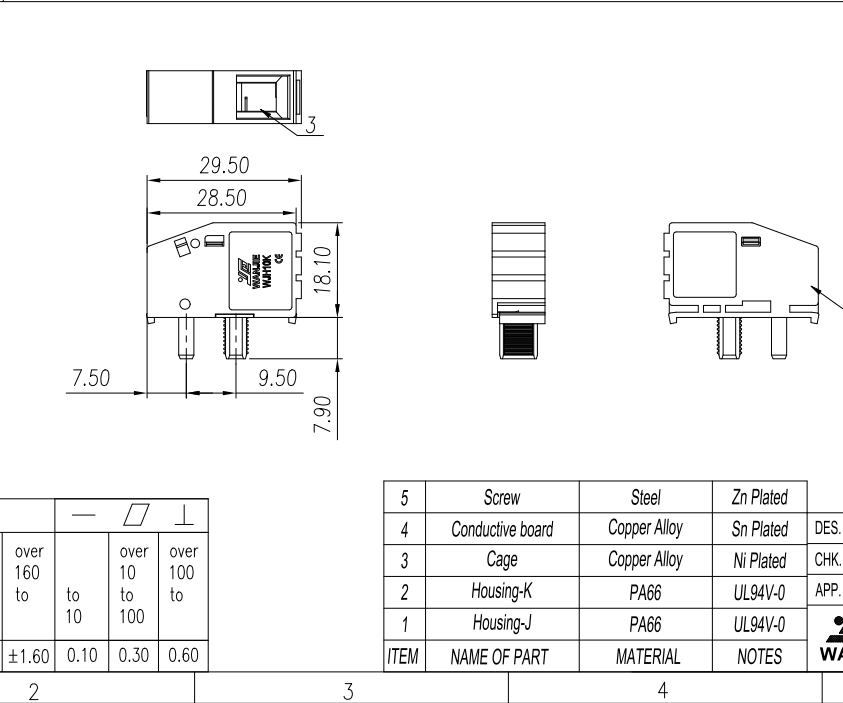
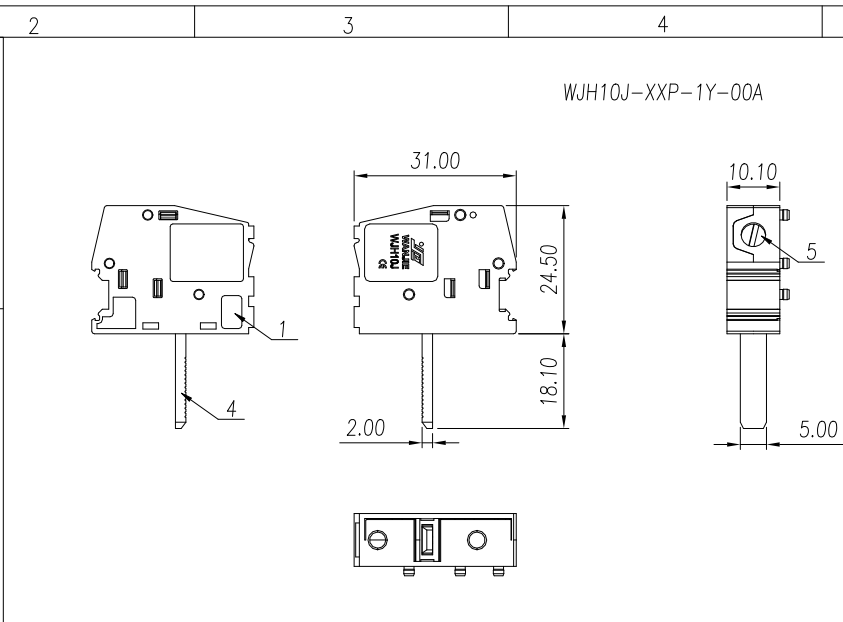
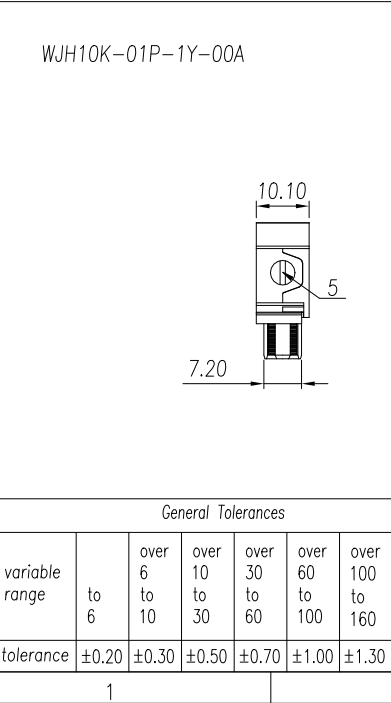


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除 本 册 给 予 明 确 授 权 外， 任 何 复 制、 翻 印、 交 叉 本 文 件 的 内 容， 均 属 违 法 行 为， 必 须 承 担 法 律 责 任。 本 公 司 保 留 对 本 文 件 所 有 权 利。

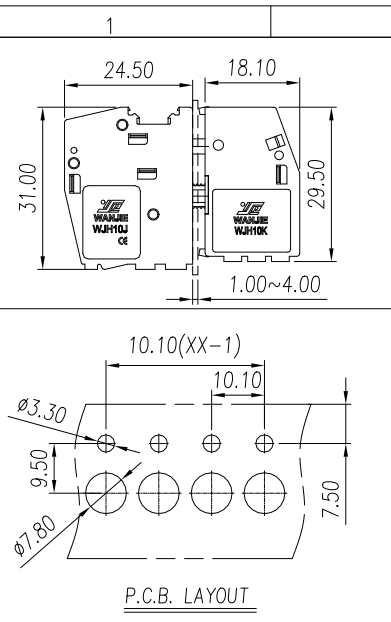

5		7						
REVISION RECORD								
REV.	DESCRIPTION		ECN No.	APPROVED	DATE			
V0	新发行			YuCZ	25.12.29			
		A						
UL/CUL 技术参数						UL1059		
UL/CUL Technical Data								
等 级	Use Group					B	C	D
额定电压	Rated Voltage [V]					300	150	300
额定电流	Rated Current [A]					65	65	10
接线范围	Wire Range					24-6		
单/多芯线	Solid/Stranded [AWG]							
耐电压	Withstanding Voltage					1600V/1Min		
IEC 技术参数						IEC61984		
IEC Technical Data								
过电压类别	Overvoltage Category	III	III	II				
污染等级	Contamination Class	3	2	2				
额定电压	Rated Voltage [V]	400	500	1000				
额定电流	Rated Current [A]	57	57	57				
额定冲击电压	Impulse withstand voltage [KV]	6.0	6.0	6.0				
导线截面积		0.5-16						
Conductor cross section								
硬质/柔性导线	Solid/ flexible [mm²]							
材 料		Material						
绝缘材料	Insulation Material	PA66						
阻燃等级	Imflammability	UL94V-0						
导体材料	Contactor Material	铜合金 Copper alloy						
导体表面镀层	Contactive Coating	镀锡 Sn Plated						
一般参数		Other Data						
间距	Pitch /极数 Poles [mm] / [P]	10.10/XX=01P						
剥线长度	Stripping Length [mm]	10						
螺丝	Screw/ 扭矩 Torque(Max) [N.m]	M4/1.2						
工作温度	Operating temperature [°C]	-40~105						
符合RoHS环保要求								
YuCZ	DATE	25.12.29	UNITS	mm	THIRD ANGLE PROJECTION			
YangHJ	DATE	25.12.29	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 2		
JASON	DATE	25.12.29	SCALE	5:6	DRAWING TYPE: SP-03	REV V0		
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJH10-XXP-1Y-00A			
5		FOR-0371 Rev.1.0						