

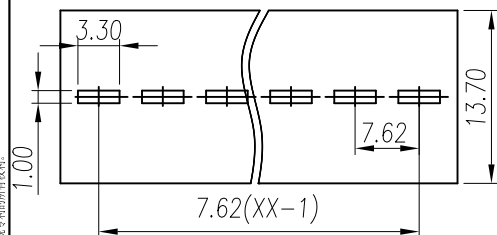


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经授权复制或传播本文件内容，或未经许可使用或传播本文件内容，将构成侵权并承担赔偿责任。本公司保留所有权利，包括但不限于专利、实用新型及外观设计。

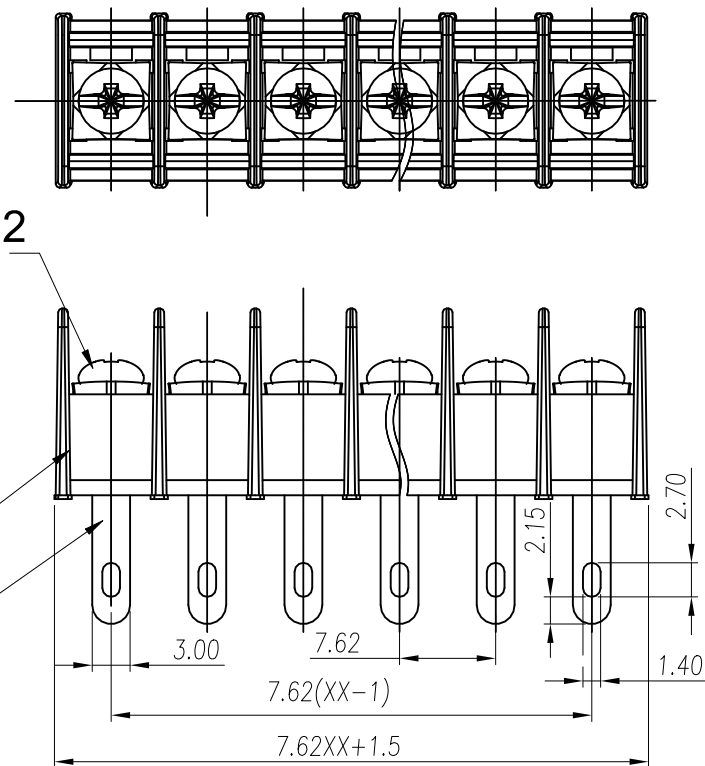

P.C.B. LAYOUT

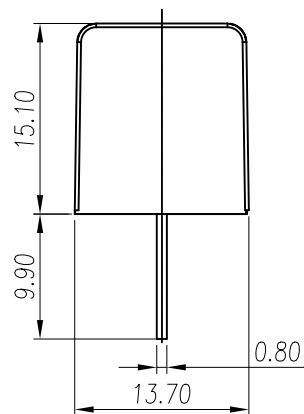

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical

额定电压/Rated voltage

300V

额定电流/Rated current

20A

接触电阻/Contact resistance

20mΩ

绝缘电阻/Insulation resistance

500MΩ/DC500V

使用线径/Wire range

22~14AWG

耐电压/With standing voltage

AC 1600V/1 Min

机械性能/Mechanica

扭矩/Torque

0.5Nm(4.5Lb.in)

温度范围/Temp.Range

-40°C~+105°C

瞬时温度/MAX Soldering

+260°C, for 5 Sec

尺寸/Dimensions

间距/Pitch

7.62mm

极数/Poles

2~26p

3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M3 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

General Tolerances								— □ ⊥		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ25H-XXP-1Y-00A	

FOR-0371 Rev.1.0