
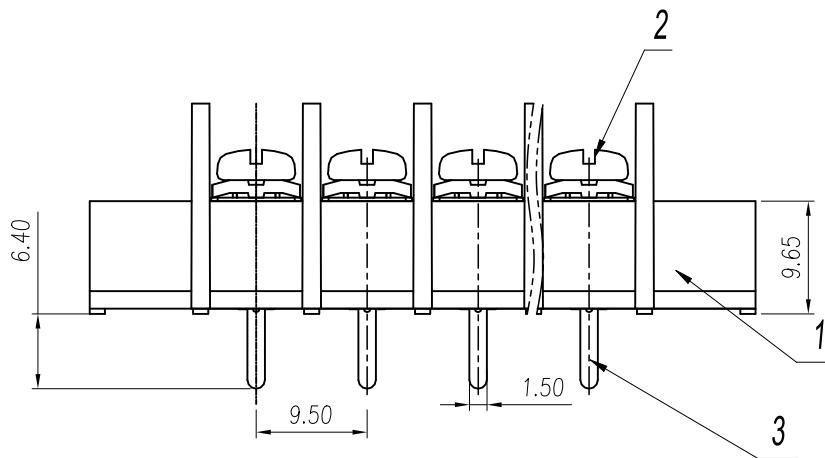
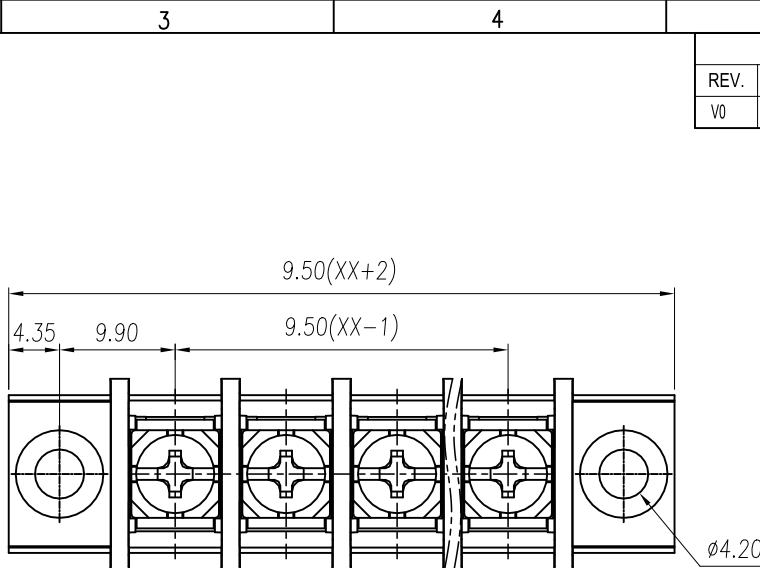
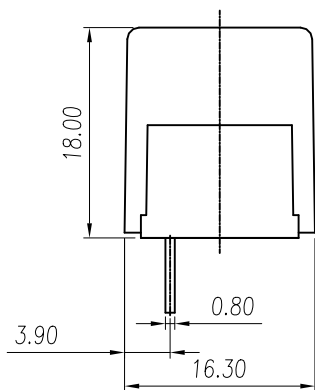


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经授权复制或传播本文件内容，或在本文件内容基础上进行发明、实用新型或外观设计，均属于侵权行为，公司将依法追究其法律责任。

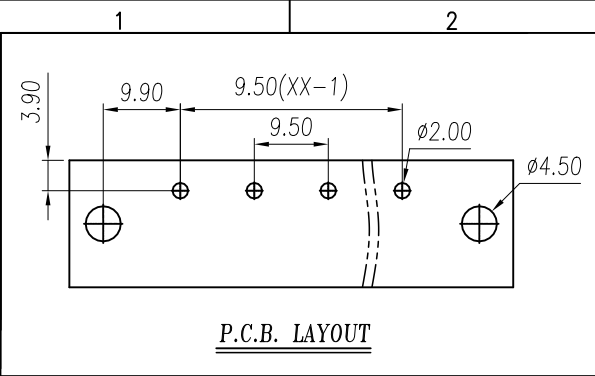

电 气 性 能/Electrical	
额定电压 /Rated voltage	300V
额定电流 /Rated current	20A
接触电阻 /Contact resistance	20mΩ
绝缘电阻 /Insulation resistance	500MΩ/DC500V
使用线径 /Wire range	22~12AWG
耐 电 压/With standing voltage	AC 1600V/1 Min
机 械 性 能/Mechanica	
扭 矩/Torque	1.2Nm(10.6Lb.in)
温度范围 /Temp.Range	-40°C~+105°C
瞬时温度 /MAX Soldering	+260°C, for 5 Sec
尺 寸/Dimensions	
间 距/Pitch	9.5mm
极 数/Poles	2~22p

3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

General Tolerances							— □ ⊥		
variable range	to	over	over	over	over	over	to	over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	to 10	10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ45SM-XXP-1Y-00A	

FOR-0371 Rev.1.0