

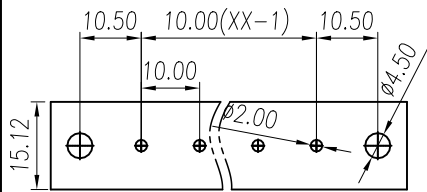
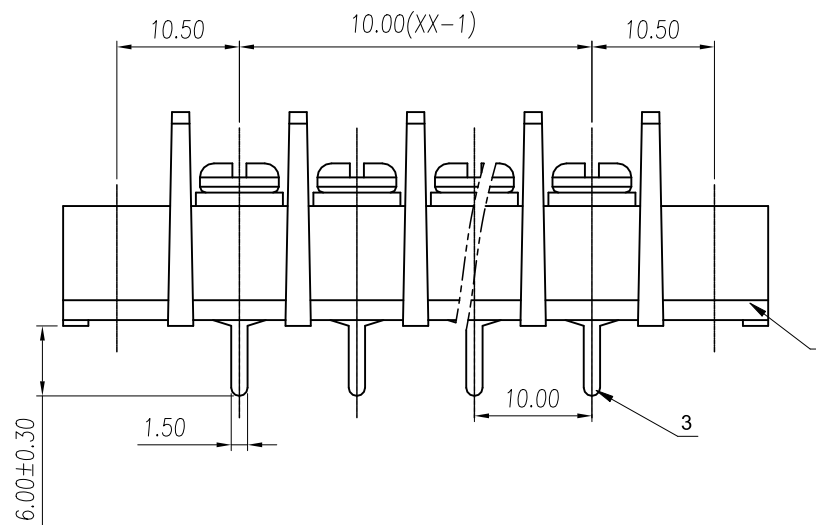


[illegible]

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

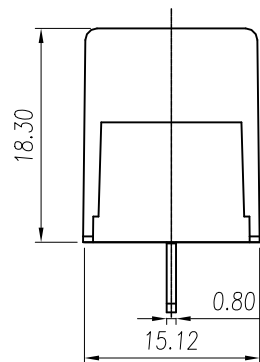

P.C.B. LAYOUT

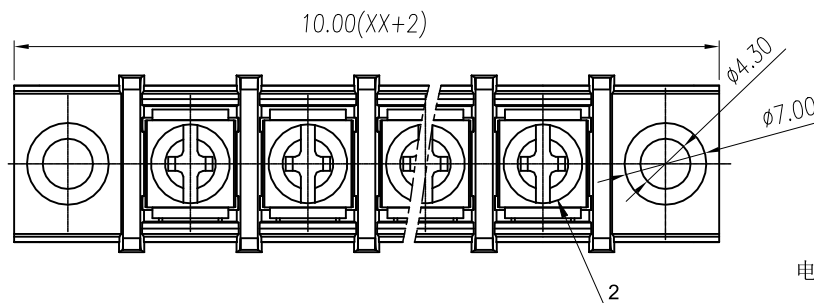

电气性能/Electrical

额定电压/Rated voltage	300V
--------------------	------

额定电流/Rated current	25A
--------------------	-----

接触电阻/Contact resistance	20mΩ
-------------------------	------

绝缘电阻/Insulation resistance	500MΩ/DC500V
----------------------------	--------------

使用线径/Wire range 22~12

耐电压/With standing voltage	AC 1600V/1 Min
---------------------------	----------------

机械性能/Mechanica

扭 矩/Torque 1.2Nm(10.6Lb.in)

温度范围/Temp.Range -40°C~+105°C

瞬时温度/MAX Soldering +260°C, for 5 Sec

尺寸/Dimensions

间距/Pitch 10.0mm

极数/Poles 2~22p

3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV	V1



WANJI

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ55CM-XXP-1Y-00A

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60