
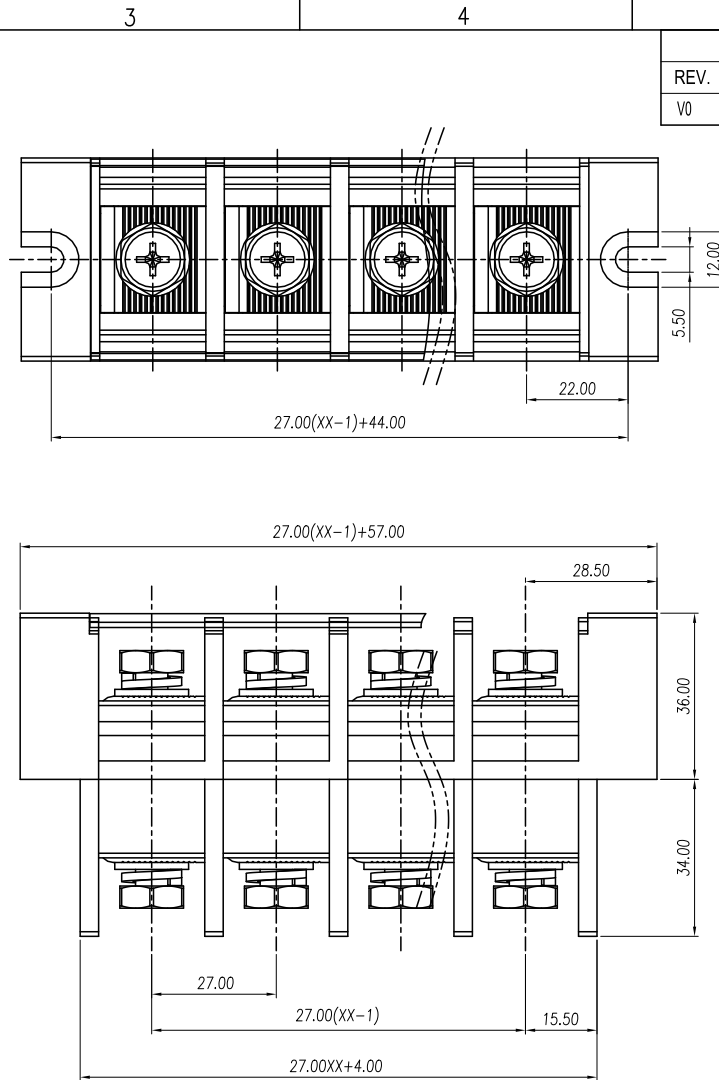
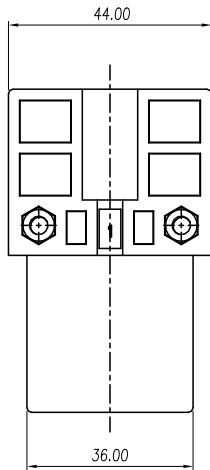


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交还本文档的内容, 侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

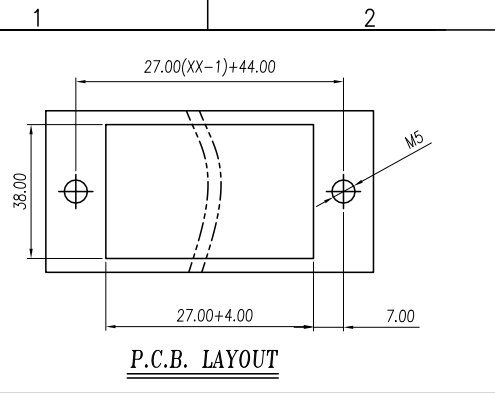

5

6

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical

额定电压 /Rated voltage	600V
额定电流 /Rated current	170A
接触电阻 /Contact resistance	20mΩ
绝缘电阻 /Insulation resistance	1000MΩ/DC500V
使用线径 /Wire range	10~2/0AWG
耐电压 /With standing voltage	AC 2200V/1 Min

机械性能/Mechanica

扭矩/Torque	6.0N.m
温度范围 /Temp.Range	-40°C~+130°C
瞬时温度 /MAX Soldering	+260°C, for 5 Sec

尺寸/Dimensions

间距/Pitch	27.0mm
极数/Poles	01~15p

5

4

3

2

1

ITEM	NAME OF PART	MATERIAL	NOTES
5	Cover	PC	UL94V-2
4	Nut	Steel	M8 Steel Zn plated
3	Current carrier	Copper Alloy	Sn Plated
2	Screws	Steel	M8 Steel Zn plated
1	Housing	PBT	UL94V-0

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

DES. ZhaoXY

CHK. HuHT

APP. Jason

DATE 24.04.01

DATE 24.04.01

DATE 24.04.01

UNITS mm

SIZE A4

SCALE 2:1

THIRD ANGLE PROJECTION

TYPE: CUSTOMER DRAWING

DRAWING TYPE: SP-03

REV V1

WJ

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:

WJ10C-27.0-XXP-1Y-00A

FOR-0371 Rev.1.0