

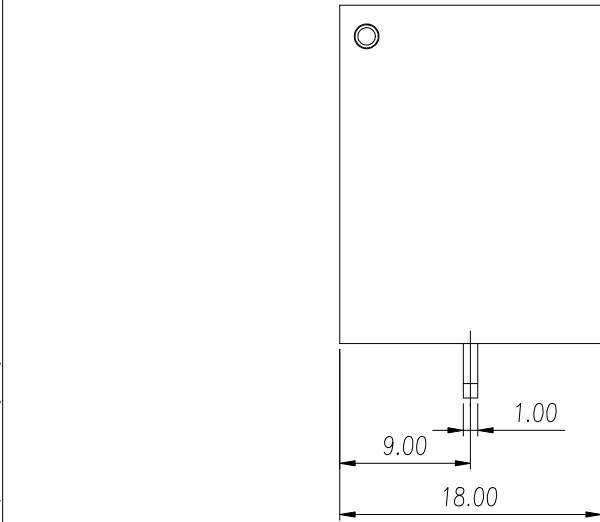
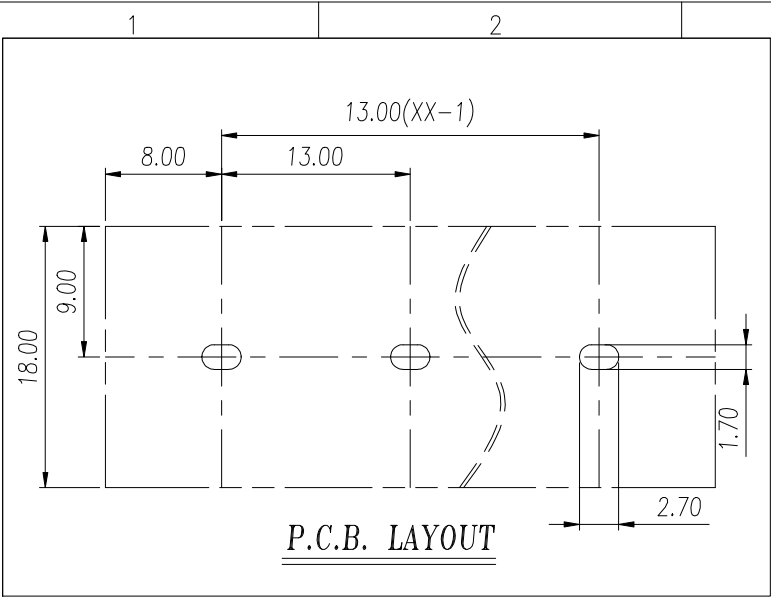


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

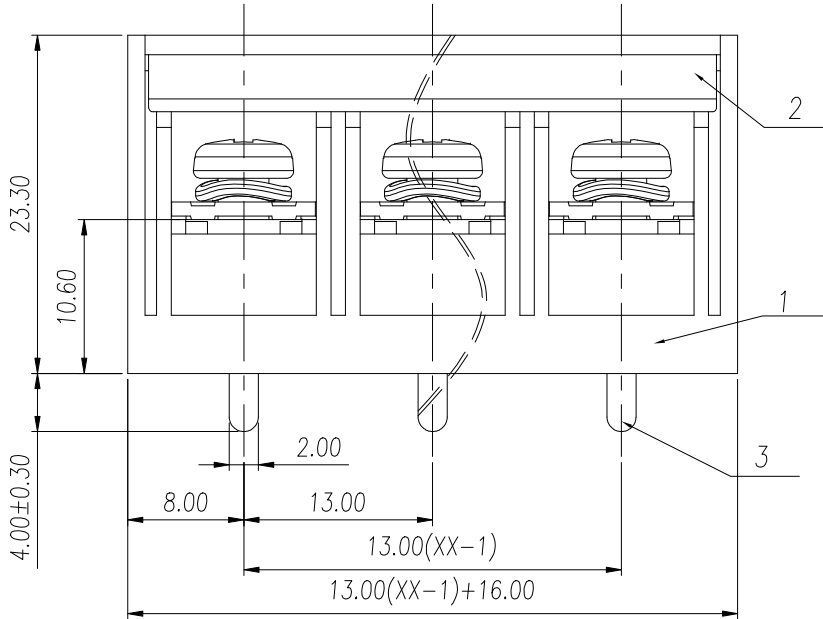

General Tolerances										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

1 2 3 4 5 6

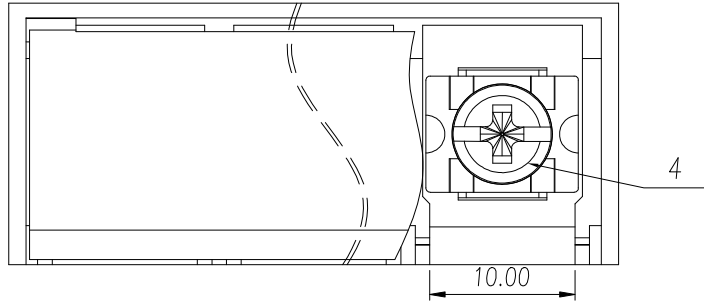

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	24.04.30

UL/CUL 技术 参数			UL1059		
UL/CUL Technical Data					
等 级	Use Group		B	C	D
额定电压	Rated Voltage [V]		600	600	600
额定电流	Rated Current [A]		40	40	5
接线范围	Wire Range		22-8		
单/多芯线	Solid/Stranded [AWG]				
耐电压	Withstanding Voltage		2200V/1Min		
IEC 技术参数					
IEC Technical Data					
过电压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage [V]		800	800	1000
额定电流	Rated Current [A]		40	40	40
额定冲击电压	Impulse withstand voltage [KV]		8.0	8.0	8.0
导线截面积	Conductor cross section		4		
硬质/柔性导线	Solid/ flexible [mm²]				
一般参数 Other Data					
间距 Pitch / 极数 Poles	[mm] / [P]		13.0 / 2~18		
剥线长度	Stripping Length [mm]		10-11		
螺丝 Screw/扭矩 Torque(Max)	[N.m]		M4/1.2		
工作温度	Operating temperature [°C]		-30~120		
焊锡温度	Soldering temperature		260°C/5S		
符合RoHS环保要求					
4	Screw		Steel	M4/Ni Plated	
3	Pin		Copper Alloy	M4/Sn Plated	
2	Cover		PC	UL94V-2	
1	Housing		PBT	UL94V-0	
ITEM	NAME OF PART		MATERIAL	NOTES	

DES.	YuCZ	DATE	24.04.30	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	24.04.30	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	24.04.30	SCALE	2:1	DRAWING TYPE: SP-03	REV V0

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	PART NO.: WJ908-13.0-XXP-1Y-00A
--	--	--	------------------------------------

5 6 FOR-0371 Rev.1.0