

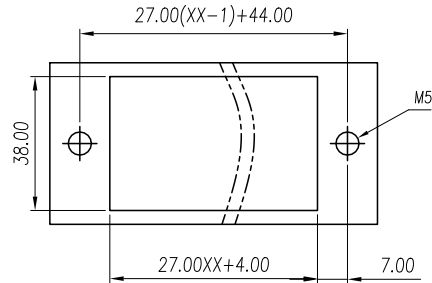
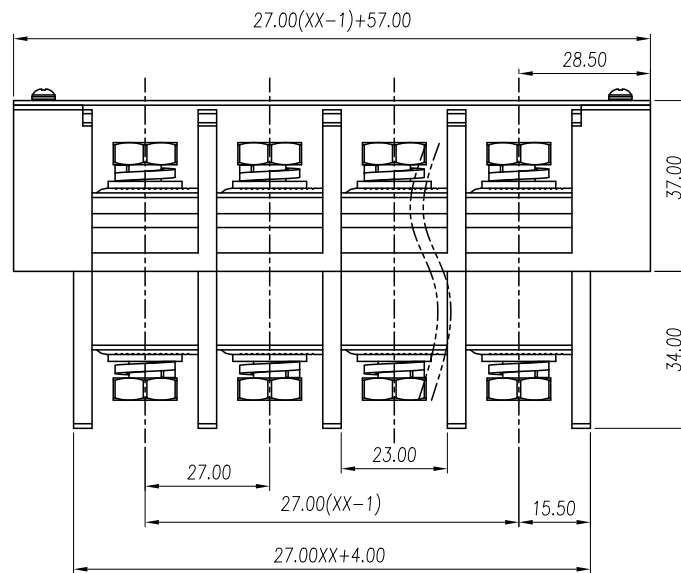


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations.
除非经本公司书面许可, 否则禁止以任何形式复制、利用、交流本文件的内容。未经书面许可擅自复制或交流, 使用者将承担相关法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

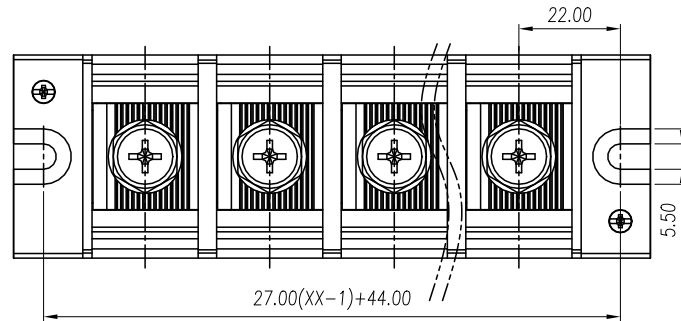

P.C.B. LAYOUT

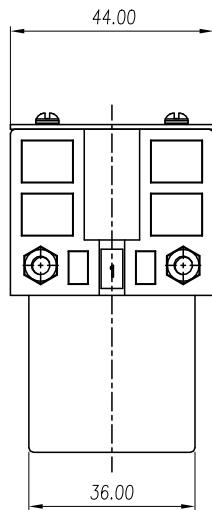

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical	
额定电压 /Rated voltage	600V
额定电流 /Rated current	170A
接触电阻 /Contact resistance	20mΩ
绝缘电阻 /Insulation resistance	1000MΩ/DC500V
使用线径 /Wire range	10~2/0AWG
耐电压 /With standing voltage	AC 2200V/1 Min
机械性能/Mechanica	
扭矩/Torque	6.0N.m
温度范围 /Temp.Range	-40°C~+130°C
瞬时温度 /MAX Soldering	+260°C, for 5 Sec
尺寸/Dimensions	
间距/Pitch	27.0mm
极数/Poles	01~15p

5	Cover	PC	UL94V-2
4	Nut	Steel	M8 Steel Zn plated
3	Current carrier	Copper Alloy	Sn Plated
2	Screws	Steel	M8 Steel Zn plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ10L-27.0-XXP-1Y-00A	

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	— □ ⊥		
								to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60