



慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术 参数 (UL1059)				
UL/CUL Technical Data				
等 级	Use Group	B	C	F
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	20	20	20
耐电压	Withstanding Voltage	2200V/1Min		
接线范围	Wire Range	26-12		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数 (IEC60947-7-1)				
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage [V]	500		
额定电流	Rated Current [A]	20		
额定冲击电压	Impulse withstand voltagea [KV]	6		
导线截面积 Conductor cross section				
单芯	Solid [mm²]	0.2-4		
柔性导线	flexible [mm²]	0.2-2.5		
柔性导线带冷压头	flexible with ferrule [mm²]	0.2-2.5		
材 料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data				
连接点数	connection points	6		
剥线长度	Stripping Length [mm]	8-10		
导轨类型	Type of rail	DIN 35		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	--		
工作温度	Operating temperatur [°C]	-40~105		



5.2

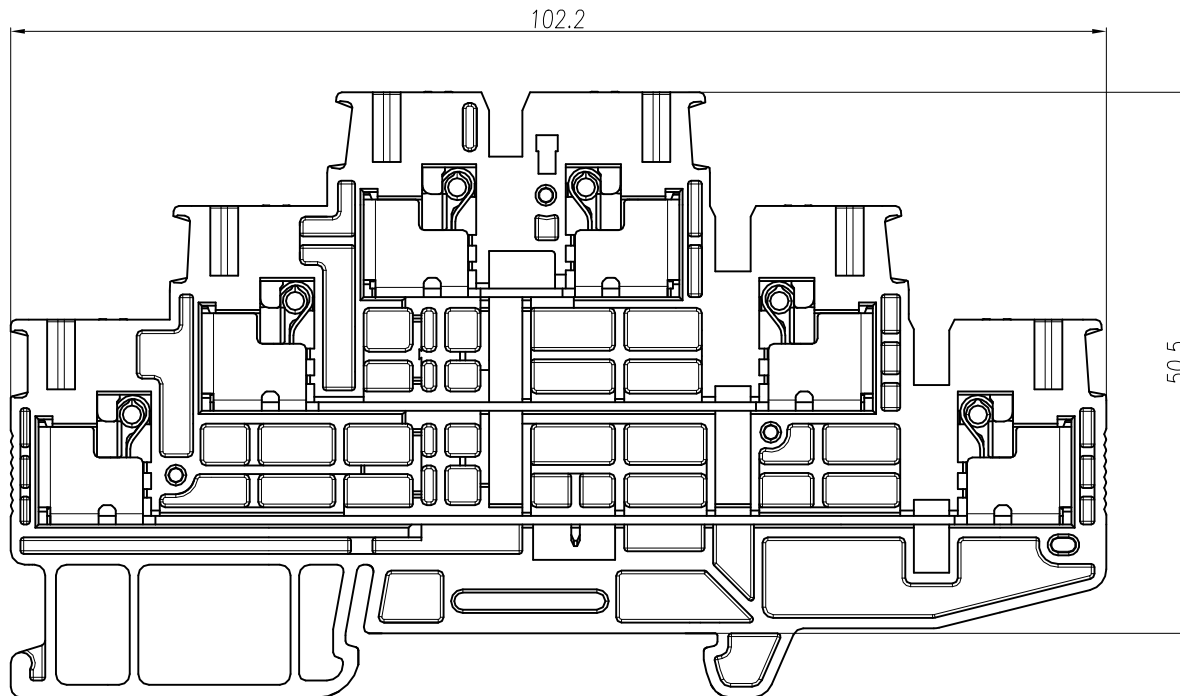

50.5

56.5



linear dimension(Tolerances Standard GB/T 14486-2008)										红色/Red	GUV2.5-302-RD-00A
										黄色/Yellow	GUV2.5-302-YE-00A
										绿色/Green	GUV2.5-302-GN-00A
										橙色/Oeange	GUV2.5-302-OG-00A
										蓝色/Blue	GUV2.5-302-BU-00A
										灰色/Gray	GUV2.5-302-GY-00A
										颜色/Colour	订货号 /Order No.
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	第三视角/THIRD ANGLE PROJECTION		版本 / REV	V0-1
						名称 / TITLE		GUV2.5-302-XX-00A	
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD									