





慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术 参数 (UL1059)				
UL/CUL Technical Data				
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	40	40	5
耐电压	Withstanding Voltage	2200V/1Min		
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]	20-8		
IEC 技术参数 (IEC60947-7-1)				
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage [V]	1000		
额定电流	Rated Current [A]	41		
额定冲击电压	Impulse withstand voltagea [KV]	8		
导线截面积 Conductor cross section				
单芯	Solid [mm²]	0.5-10		
柔性导线	flexible [mm²]	0.5-6		
柔性导线带冷压头	flexible with ferrule [mm²]	0.5-6		
材 料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data				
连接点数	connection points	2		
剥线长度	Stripping Length [mm]	10-12		
导轨类型	Type of rail	DIN 35		
螺丝	Screw/扭矩 Torque(Max) [N.m]	--		
工作温度	Operating temperatur [°C]	-40-105		

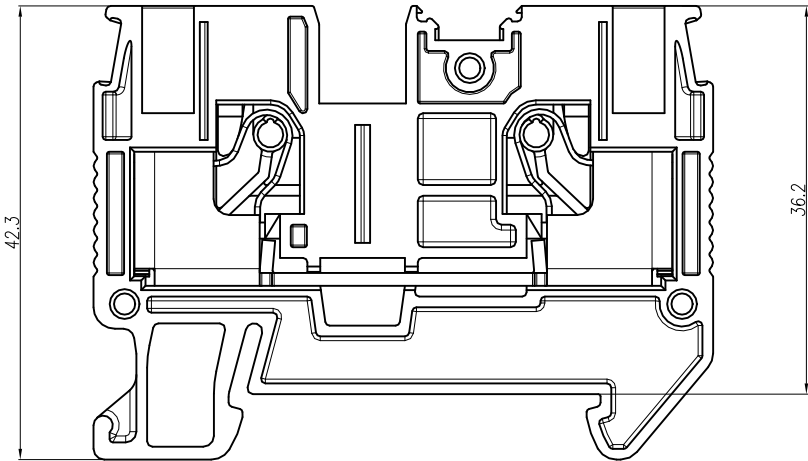

linear dimension(Tolerances Standard GB/T 14486-2008)										—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to			
	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		
	tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	
										红色/Red	GUV6-102-RD-00A	
										黑色/Black	GUV6-102-BK-00A	
										黄色/Yellow	GUV6-102-YE-00A	
										绿色/Green	GUV6-102-GN-00A	
										橙色/Orange	GUV6-102-OG-00A	
										蓝色/Blue	GUV6-102-BU-00A	
										灰色/Gray	GUV6-102-GY-00A	
										颜色/Colour	订货号 /Order No.	

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	V0
						名称 / TITLE		GUV6-102-XX-00A	
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD									