



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数 (UL1059)
UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	40	40	5
耐电压	Withstanding Voltage	2200V/1Min		
接线范围	Wire Range	20-8		
单/多芯线	Solid/Stranded [AWG]			



IEC 技术参数 (IEC60947-7-1)
IEC Technical Data

过电压类别	Overvoltage Category	III
污染等级	Contamination Class	3
额定电压	Rated Voltage [V]	1000
额定电流	Rated Current [A]	41
额定冲击电压	Impulse withstand voltagea [KV]	8

导线截面积	Conductor cross section	
单芯	Solid [mm ²]	0.5-10
柔性导线	flexible [mm ²]	0.5-6
柔性导线带冷压头	flexible with ferrule [mm ²]	0.5-6

材料	Material	
绝缘材料	Insulation Material	PA66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactor Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀锡 Sn Plated

一般参数	Other Data	
连接点数	connection points	3
剥线长度	Stripping Length [mm]	10-12
导轨类型	Type of rail	DIN 35
螺丝	Screw/扭矩 Torque(Max) [N.m]	--
工作温度	Operating temperatur [°C]	-40~105

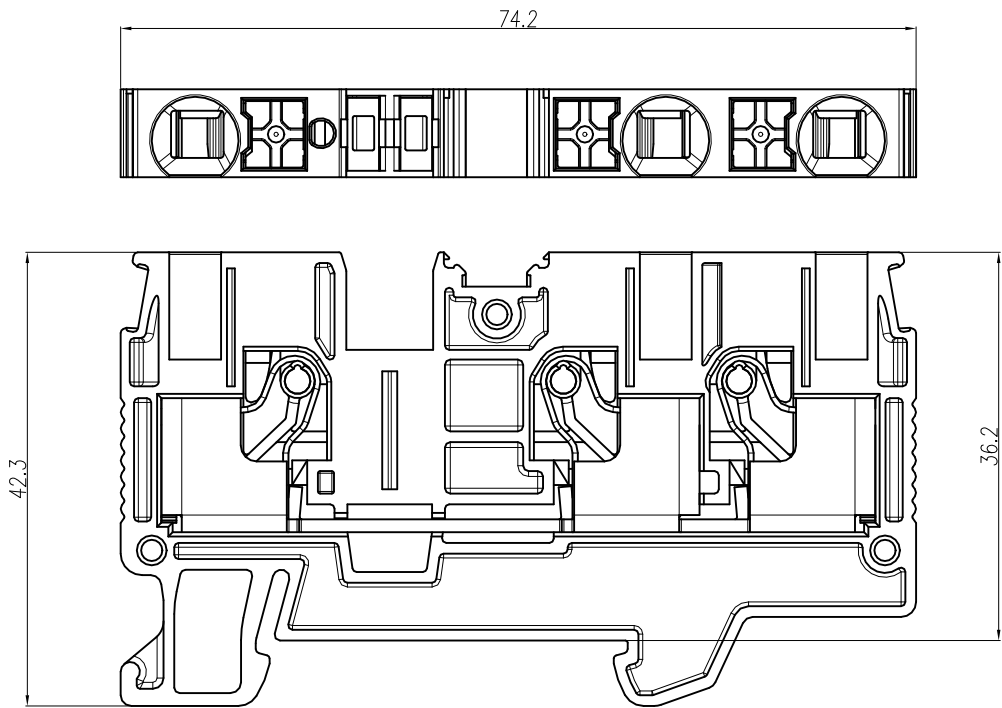

linear dimension(Tolerances Standard GB/T 14486-2008)										—  		红色/Red	GUV6-103-RD-00A
												黑色/Black	GUV6-103-BK-00A
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	to 100	黄色/Yellow	GUV6-103-YE-00A		
										绿色/Green	GUV6-103-GN-00A		
										橙色/Orange	GUV6-103-OG-00A		
										蓝色/Blue	GUV6-103-BU-00A		
										灰色/Gray	GUV6-103-GY-00A		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	颜色/CoIour	订货号 /Order No.	

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	GUV6-103-XX-00A	