




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

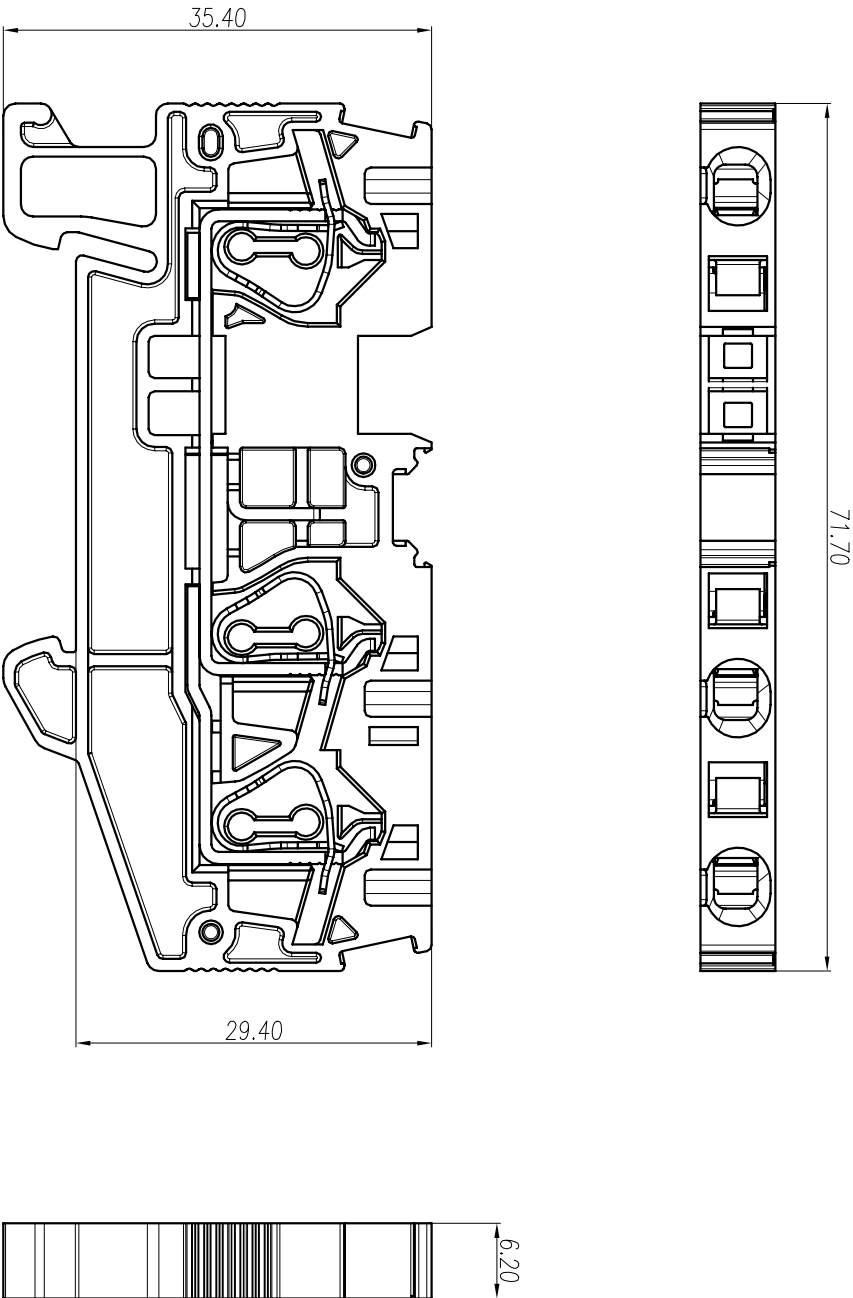

UL/CUL 技术参数 (UL1059)			
UL/CUL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage	V	600 600 600
额定电流	Rated Current	A	30 30 5
耐电压	Withstanding Voltage		2200V/1Min
接线范围	Wire Range		
单/多芯线	Solid/Stranded	AWG	24-10
IEC 技术参数 (IEC8947-1)			
IEC Technical Data			
过电压类别	Overvoltage Category		III
污染等级	Contamination Class		3
额定电压	Rated Voltage	V	800
额定电流	Rated Current	A	32
额定冲击电压	Impulse withstand voltage	kV	8
导线截面积	Conductor cross section		
单芯	Solid	mm ²	0.2-6.0
柔性导线	flexible	mm ²	0.2-4.0
柔性导线带压头	flexible with ferrule	mm ²	0.2-4.0
材料	Material		
绝缘材料	Insulation Material		PA66
阻燃等级	Inflammability		UL94V-0
导体材料	Conductor Material		铜合金 Copper alloy
导体表面镀层	Conductive Coating		镀锡 Sn Plated
一般参数 Other Data			
连接点数	connection points		3
剥线长度	Stripping Length	mm	8-10
导线类型	Type of rail		DIN 35
螺丝	Screw/扭矩 Torque(N·m)		-
工作温度	Operating temperatur	℃	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)												—		□		┴	
variable range	tolerance to 6 to 10	over 6	over 10	over 30	over 60	over 100	over 160	over 160	over 10	over 100	over 100						
		to 6	to 10	to 30	to 60	to 100	to 160	to 160	to 10	to 100	to 100						
		to 6	to 10	to 30	to 60	to 100	to 160	to 160	to 10	to 100	to 100						
		to 6	to 10	to 30	to 60	to 100	to 160	to 160	to 10	to 100	to 100						
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±1.60	0.10	0.30	0.60						
颜色/colour												红色/Red		GLS4-103-RO-004			
												黑色/Black		GLS4-103-BK-004			
												黄色/Yellow		GLS4-103-YE-004			
												绿色/Green		GLS4-103-GH-004			
												橙色/Orange		GLS4-103-OG-004			
												蓝色/Blue		GLS4-103-BL-004			
												灰色/Gray		GLS4-103-GY-004			
												订货号/Order No.					