



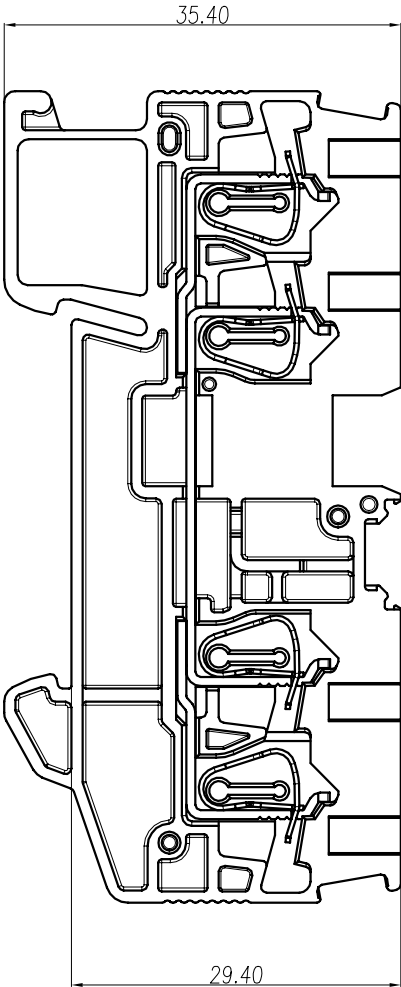

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

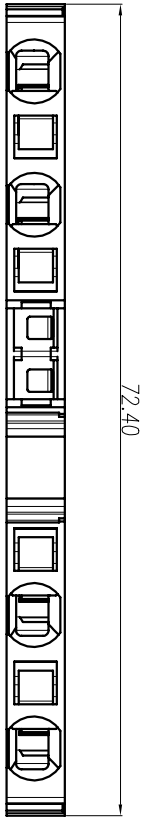

UL/CUL 技术参数 (UL1059)			
UL/CUL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage	M	600 600 600
额定电流	Rated Current	A	20 20 5
耐电压	Withstanding Voltage		2200V/1Min
接线范围	Wire Range		
单芯芯线	Solid/Stranded	[AWG]	26-12
IEC 技术参数 (IEC60947-7-12)		IEC 60947-7-1	
IEC Technical Data			
过电压类别	Overvoltage Category		III
污染等级	Contamination Class		3
额定电压	Rated Voltage	V	800
额定电流	Rated Current	A	24
额定冲击电压			
Impulse withstand voltage	[kV]		8
导线截面积	Conductor cross section		
单芯	Solid	[mm ²]	0.2-4.0
柔性导线	flexible	[mm ²]	0.2-2.5
柔性导线带冷压头	flexible with ferrule	[mm ²]	0.2-2.5
材料			
绝缘材料	Insulation Material		PA66
阻燃等级	Inflammability		UL94V-0
导体材料	Conductor Material		铜合金 Copper alloy
导体表面镀层	Conductive Coating		镀锡 Sn Plated
一般参数			
连接点数	connection points		4
剥线长度	Stripping Length	[mm]	8-10
导线类型	Type of rail		DIN 35
螺丝	Screw/Torque	[N.m]	-
工作温度	Operating temperatur	[°C]	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over	over	over	over	over	over	over	over	over	over	over
variable range	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to 10	10 to 100	100 to 100	100 to 100	100 to 100	100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	0.60

红色/Red	GUS2.5-104-RD-00A
黑色/Black	GUS2.5-104-BK-00A
黄色/Yellow	GUS2.5-104-YE-00A
绿色/Green	GUS2.5-104-GN-00A
橙色/Orange	GUS2.5-104-OG-00A
蓝色/Blue	GUS2.5-104-BU-00A
灰色/Gray	GUS2.5-104-GY-00A

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称 / TITLE	GUS2.5-104-XX-00A				版本 / REV
					V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD