





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数 (UL1050)

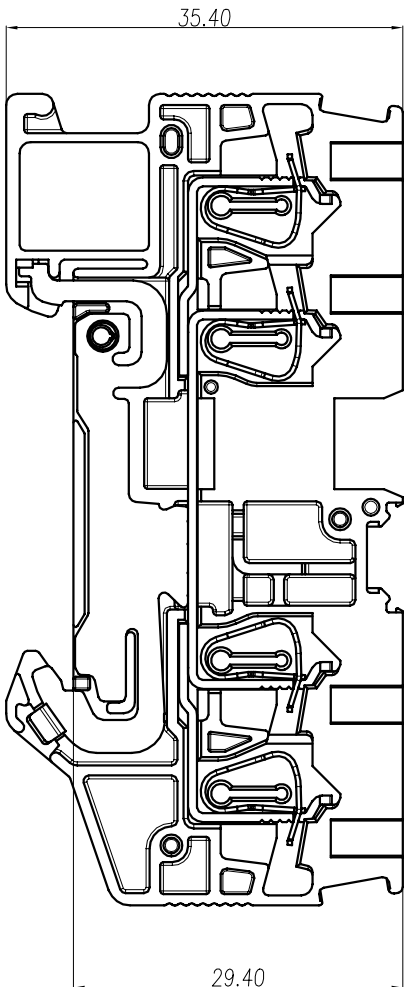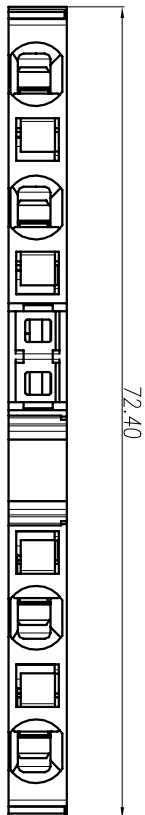

UL/CUL 技术参数 (UL1050)	UL/CUL Technical Data	等级	Use Group	B	C	D
额定电压	Rated Voltage	[V]		-	-	-
耐电压	Withstanding Voltage			2200V/Min		
连接范围	Wire Range					
单芯芯线	Solid/Stranded	[AWG]		26-12		
IEC 技术参数 (IEC60947-7-12)	IEC Technical Data					
过电压类别	Overvoltage Category			III		
污染等级	Contamination Class			3		
额定电压	Rated Voltage	[V]		-		
额定冲击电压	Rated impulse withstand voltage	[kV]		8		
导线截面积	Conductor cross section					
单芯	Solid	[mm ²]		0.2-4.0		
柔性导线	flexible	[mm ²]		0.2-2.5		
柔性导线带压头	flexible with ferrule	[mm ²]		0.2-2.5		

材料	Material	绝缘材料	Insulation Material	阻燃等级	Inflammability	导体材料	Conductor Material	导体表面处理层	Conductive Coating
			PA66		UL94V-0		铜合金 Copper alloy		镀锡 Sn Plated
一般参数	Other Data								
连接点数	connection points		4						
剥线长度	Stripping Length	[mm]	8-10						
导线类型	Type of rail		DIN 35						
螺丝	Screw/扭矩 Torque(Nm)	[Nm]	-						
工作温度	Operating temperatur	[°C]	-40-105						

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	tolerance	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 0.60
±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

黄绿色 / green-Yellow	颜色 / Colour	GUS2.5-104-PE-00A	订货号 / Order No.
--------------------	-------------	-------------------	-----------------

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 1:1



第三视角 / THIRD ANGLE PROJECTION

版本 / REV V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 / TITLE

GUS2.5-104-PE-00A