





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

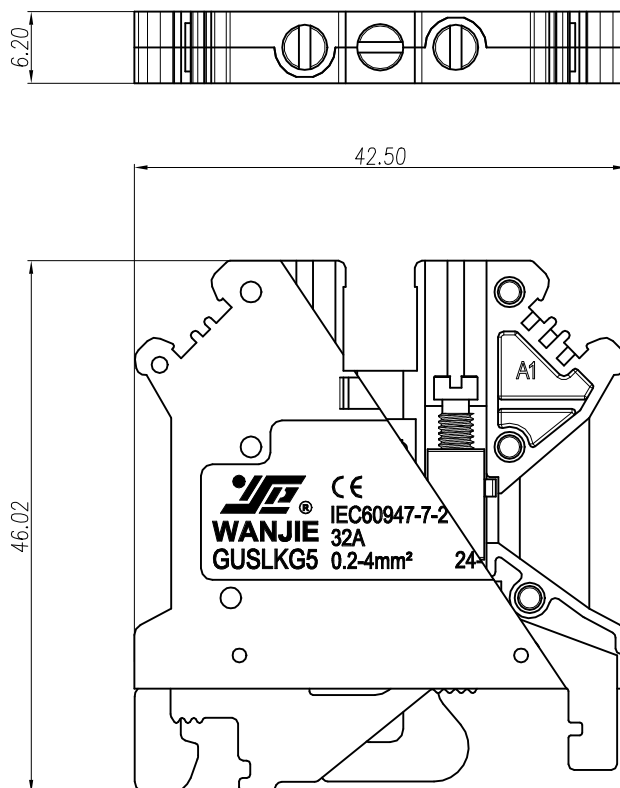

UL/CUL 技术参数 (UL1059)		UL/CUL Technical Data		
接线范围	Wire Range	单/多芯线	Solid/Stranded [AWG]	
				24-10
IEC 技术参数 (IEC60947-7-2)		IEC Technical Data		
过电压类别	Overvoltage Category			III
污染等级	Contamination Class			3
导线截面积		Conductor cross section		
单芯	Solid	[mm²]		0.2-6
柔性导线	flexible	[mm²]		0.2-4
柔性导线带冷压头	flexible with ferrule	[mm²]		0.2-0.25
材料		Material		
绝缘材料	Insulation Material			PA66
阻燃等级	Imflammability			UL94 V-0
导体材料	Contacting Material			铜合金 Copper alloy
导体表面镀层	Contactive Coating			镀镍 Ni Plated
一般参数		Other Data		
连接点数	connection points			2
剥线长度	Stripping Length	[mm]		8
导轨类型	Type of rail			DIN 35/DIN 32
螺丝	Screw/扭矩	Torque(Max) [N·m]		M3/0.6-0.8
工作温度	Operating temperatur	[°C]		-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

黄绿色 /green-yellow	GUSLKG5-102-PE-00A
颜色 /Colour	订货号 /Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	GUSLKG5-102-PE-00A	