




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

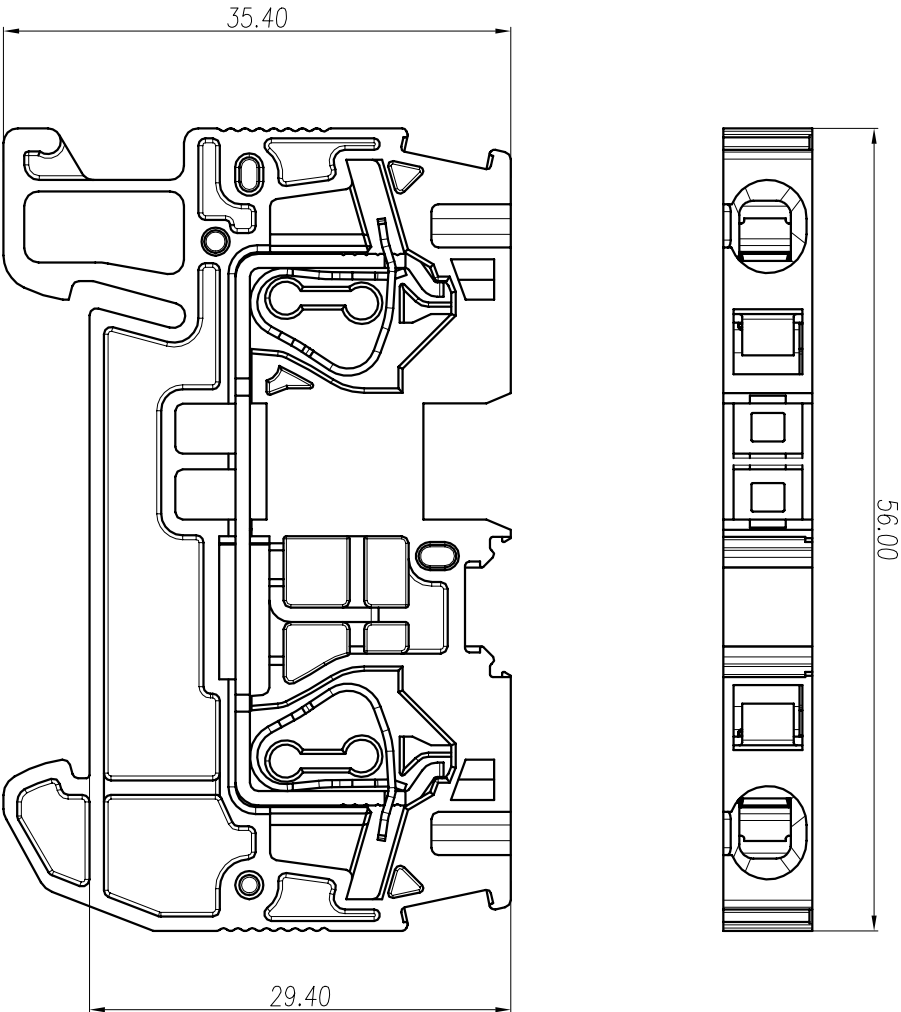

UL/CUL 技术参数 (UL1059)			
UL/CUL Technical Data			
等级	Use Group	B	C
额定电压	Rated Voltage	600	600
额定电流	Rated Current	30	30
耐电压	Withstanding Voltage	2200V/1Min	
接线紧固	Wire Range		
单/多芯线	Solid/Stranded	24-10	
IEC 技术参数 (IEC8947-1)			
IEC Technical Data			
过电压类别	Overvoltage Category		III
污染等级	Contamination Class		3
额定电压	Rated Voltage		800
额定电流	Rated Current		32
额定冲击电压	Impulse withstand voltage		8
导线截面积	Conductor cross section		
单芯	Solid		0.2-6.0
柔性导线	flexible		0.2-4.0
柔性导线带冲压头	flexible with ferrule		0.2-4.0
材料			
绝缘材料	Insulation Material		PA66
阻燃等级	Inflammability		UL94V-0
导体材料	Conductor Material		铜合金 Copper alloy
导体表面镀层	Conductive Coating		镀锡 Sn Plated
一般参数			
连接点数	connection points		2
剥线长度	Stripping Length		8-10
导线类型	Type of rail		DIN 35
螺丝	Screw Torque(N·m)		-
工作温度	Operating temperatur		-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)												—		□		└	
variable range	to 6 to 10 to 30 to 60 to 100 to 160	over 6	over 10	over 30	over 60	over 100	over 160			over 10	over 100						
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60		0.10	0.30	0.60						
颜色/color												红色/red		GLS4-102-RO-004			
												黑色/black		GLS4-102-BK-004			
												黄色/yellow		GLS4-102-YE-004			
												绿色/green		GLS4-102-GH-004			
												橙色/orange		GLS4-102-OC-004			
												蓝色/blue		GLS4-102-BL-004			
												灰色/gray		GLS4-102-GY-004			
颜色/color												订货号/Order No.					