




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

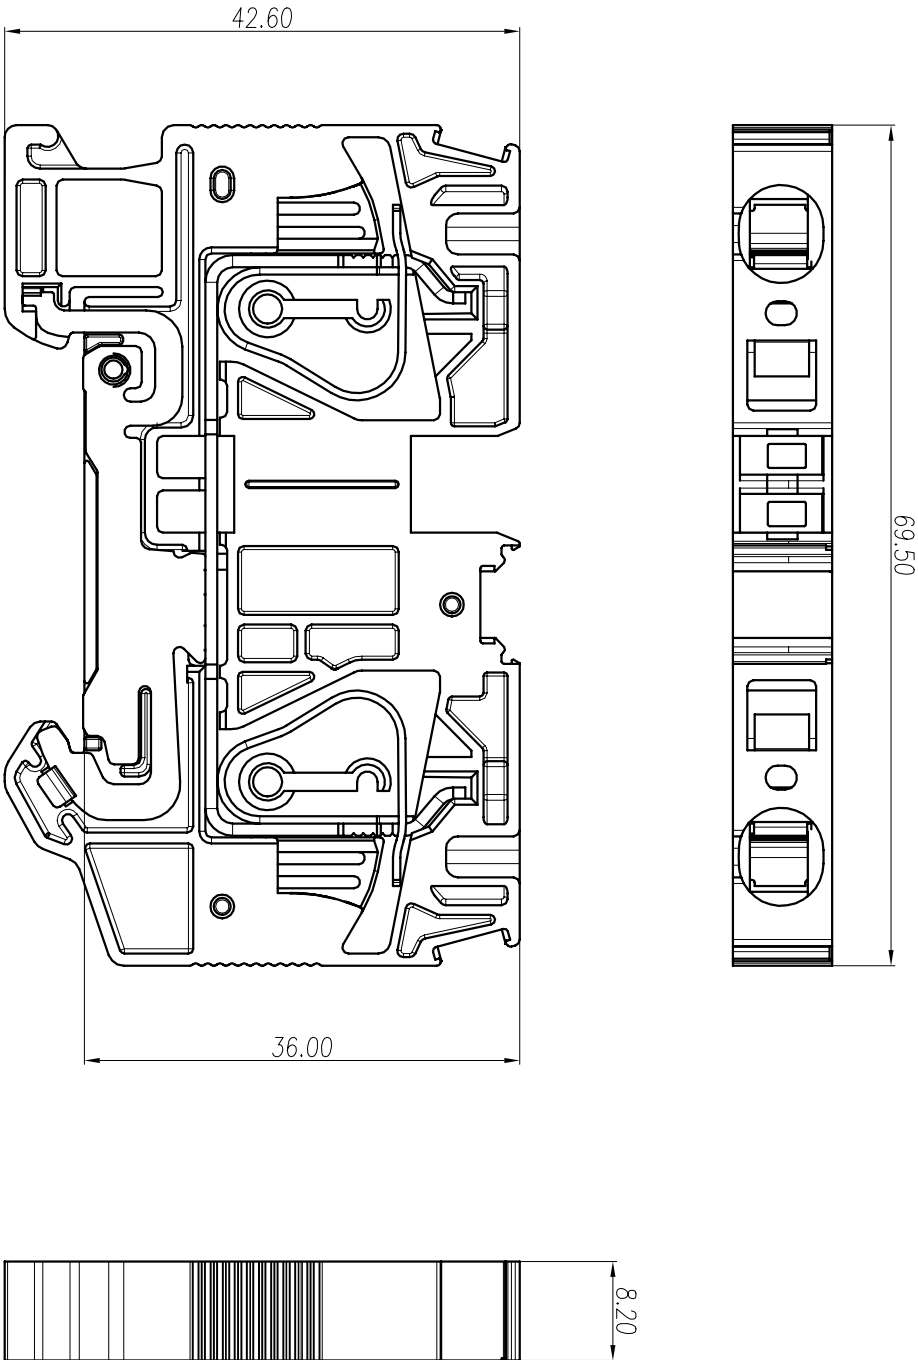

UL/CUL 技术参数 (UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage	V	-	-
耐电压	Withstanding Voltage	2200V/1Min		
接线范围	Wire Range	24-8		
单/多芯线	Solid/Stranded	[AWG]		
IEC 技术参数 (IEC60947-2)				
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage	V		
额定冲击电压	Impulse withstand voltage	[kV]		
导线横截面积	Conductor cross section	mm²		
单芯	Solid	0.2-10.0		
柔性导线	flexible	[mm²]		
柔性导线带冲压头	flexible with ferrule	[mm²]		
材料				
绝缘材料	Insulation Material	PA66		
阻燃等级	Inflammability	UL94V-0		
导体材料	Conductor Material	铜合金 Copper alloy		
导体表面镀层	Conductive Coating	镀锡 Sn Plated		
一般参数				
连接点数	connection points	2		
剥线长度	Stripping Length	[mm]		
导线类型	Type of rail	DIN 35		
螺丝	Screw Torque(Max)	[N.m]		
工作温度	Operating temperatur	[°C]		

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over	to	over	to	over	to	over	to	over	to
6	10	10	30	30	60	60	100	100	160	160	10
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	0.60

黄绿色 green-yellow	GUS6-102-PE-00A
颜色/colour	订货号/Order No.

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称/TITLE	GUS6-102-PE-00A				
版本/REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD