




慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

| REVISION RECORD |             |         |          |
|-----------------|-------------|---------|----------|
| REV.            | DESCRIPTION | ECN No. | APPROVED |
|                 |             |         |          |
|                 |             |         |          |
|                 |             |         |          |
|                 |             |         |          |

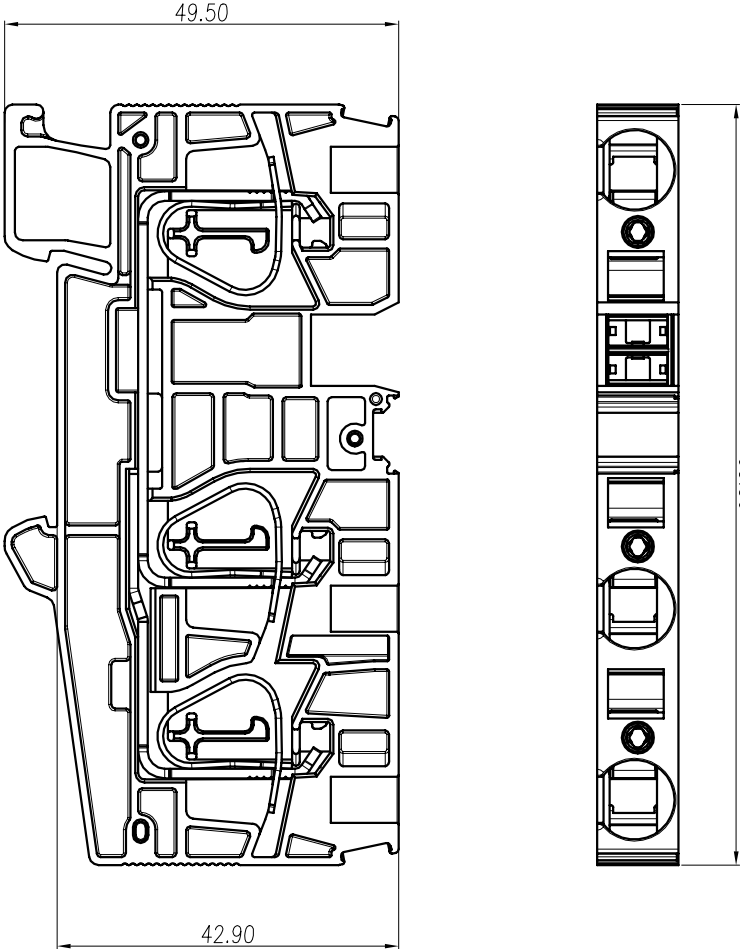

| UL/CUL 技术参数 (UL1059)  |                         |                 |                  |
|-----------------------|-------------------------|-----------------|------------------|
| UL/CUL Technical Data |                         |                 |                  |
| 等级                    | Use Group               | B               | C D              |
| 额定电压                  | Rated Voltage           | V               | 600 600 800      |
| 额定电流                  | Rated Current           | A               | 65 65 5          |
| 耐电压                   | Withstanding Voltage    |                 | 2200V/1Min       |
| 接线范围                  | Wire Range              |                 |                  |
| 单/多芯线                 | Solid/Stranded          | AWG             | 24-6             |
| IEC 技术参数 (IEC8947-1)  |                         |                 |                  |
| IEC Technical Data    |                         |                 |                  |
| 过电压类别                 | Overvoltage Category    |                 | III              |
| 污染等级                  | Contamination Class     |                 | 3                |
| 额定电压                  | Rated Voltage           | V               | 1000             |
| 额定电流                  | Rated Current           | A               | 57               |
| 额定冲击电压                | Rated impulse voltage   | kV              | 8                |
| 导线截面积                 | Conductor cross section |                 |                  |
| 单芯                    | Solid                   | mm <sup>2</sup> | 0.2-16.0         |
| 柔性导线                  | flexible                | mm <sup>2</sup> | 0.2-10.0         |
| 柔性导线带冲压头              | flexible with ferrule   | mm <sup>2</sup> | 0.25-10.0        |
| 材料                    | Material                |                 |                  |
| 绝缘材料                  | Insulation Material     |                 | PA66             |
| 阻燃等级                  | Inflammability          |                 | UL94V-0          |
| 导体材料                  | Conductor Material      |                 | 铜合金 Copper alloy |
| 导体表面镀层                | Conductive Coating      |                 | 镀锡 Sn Plated     |
| 一般参数 Other Data       |                         |                 |                  |
| 连接点数                  | connection points       |                 | 3                |
| 剥线长度                  | Stripping Length        | mm              | 18               |
| 导引类型                  | Type of rail            |                 | DIN 35           |
| 螺丝                    | Screw/Torque            | N.m             | -                |
| 工作温度                  | Operating temperatur    | °C              | -40~105          |

| linear dimension (tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |                |                |                 |                 |                 |
|--------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|----------------|----------------|-----------------|-----------------|-----------------|
| — 0.10 0.30 0.60                                       |       |              |               |               |                |                 |                |                |                 |                 |                 |
| variable range                                         | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to 10 | over 10 to 100 | over 100 to 100 | over 100 to 100 | over 100 to 100 |
|                                                        | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to 10 | over 10 to 100 | over 100 to 100 | over 100 to 100 | over 100 to 100 |
|                                                        | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to 10 | over 10 to 100 | over 100 to 100 | over 100 to 100 | over 100 to 100 |
|                                                        | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to 10 | over 10 to 100 | over 100 to 100 | over 100 to 100 | over 100 to 100 |
|                                                        | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to 10 | over 10 to 100 | over 100 to 100 | over 100 to 100 | over 100 to 100 |
| tolerance                                              | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60          | 0.10           | 0.30            | 0.60            | 0.60            |
| 颜色/Color                                               |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 红色/Red                                                 |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 黑色/Black                                               |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 黄色/Yellow                                              |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 绿色/Green                                               |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 橙色/Orange                                              |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 蓝色/Blue                                                |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 灰色/Gray                                                |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 颜色/Color                                               |       |              |               |               |                |                 |                |                |                 |                 |                 |
| 订货号/Order No.                                          |       |              |               |               |                |                 |                |                |                 |                 |                 |

| 单位/UNITS                    | mm               | 尺寸/SIZE | A4 | 比例/SCALE | 1:1 |
|-----------------------------|------------------|---------|----|----------|-----|
| 第三视角/THIRD ANGLE PROJECTION |                  |         |    |          |     |
| 名称/TITLE                    | GUS10-103-XX-00A |         |    |          |     |
| 版本/REV                      | V0               |         |    |          |     |



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD