


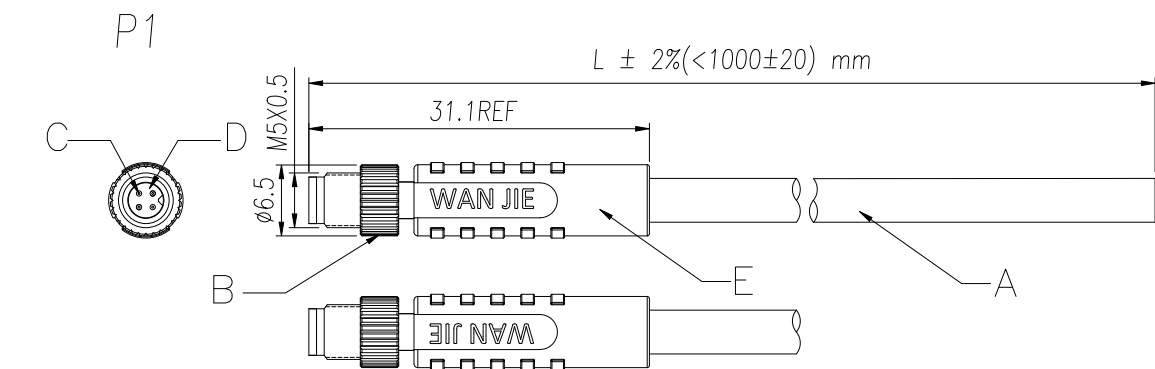

Contacts Pin 数	3Pin	4Pin
Coding 编码	 A-Coding	 A-Coding
Rated Current 额定电流	1A	1A
Rated Voltage 额定电压	60V	60V
Wire Range 线范围	26AWG	26AWG
PART NO. 品名 (0.15m):	M05-A03-ST0-M02-BCC-015	M05-A04-ST0-M02-BCC-015
PART NO. 品名 (1.0m):	M05-A03-ST0-M02-BCC-100	M05-A04-ST0-M02-BCC-100
PART NO. 品名 (2.0m):	M05-A03-ST0-M02-BCC-200	M05-A04-ST0-M02-BCC-200
PART NO. 品名 (3.0m):	M05-A03-ST0-M02-BCC-300	M05-A04-ST0-M02-BCC-300
PART NO. 品名 (5.0m):	M05-A03-ST0-M02-BCC-500	M05-A04-ST0-M02-BCC-500
Customized. 定制化:	M05-A03-ST0-M02-BCC-XXX	M05-A04-ST0-M02-BCC-XXX

M05-A XX-ST0-M02-BCC-XXX
Pin Number:03,04
Cable Length L:
050=0.5m;100=1.0m; 10M=10m;

3Pin
P1 Wirelist
1 brown
3 blue
4 black

4Pin
P1 Wirelist
1 brown
2 White
3 blue
4 black

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2021.08.25

IEC 技术参数		IEC61076-2-105
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	60
额定电流	Rated Current [A]	1
导线截面积	Conductor cross section	0.14
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	26
单/多芯线	Solid/Stranded [AWG]	
材料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated 铜镀镍
符合RoHS环保要求		

E		PUR	Molded With Black PUR	G	5
D		Housing	A-Coding Male,Black PA66	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M5X0.5,Brass With Nickel Plated	pcs	1
A		Cable	UL2464 26AWG Black PVC Jacket	mm	XXX
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

			慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M05-AXX-ST0-M02-BCC-XXX		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No : ---		Drawing No.:	SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION	PAGE
	6~30	±0.2	CHK.		DATE				1 of 1
	>30	±2%			DATE	SIZE	A4		
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级:外部公开	