

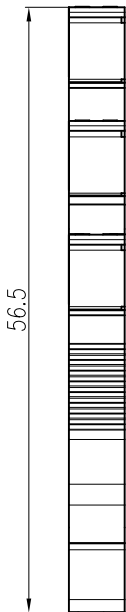


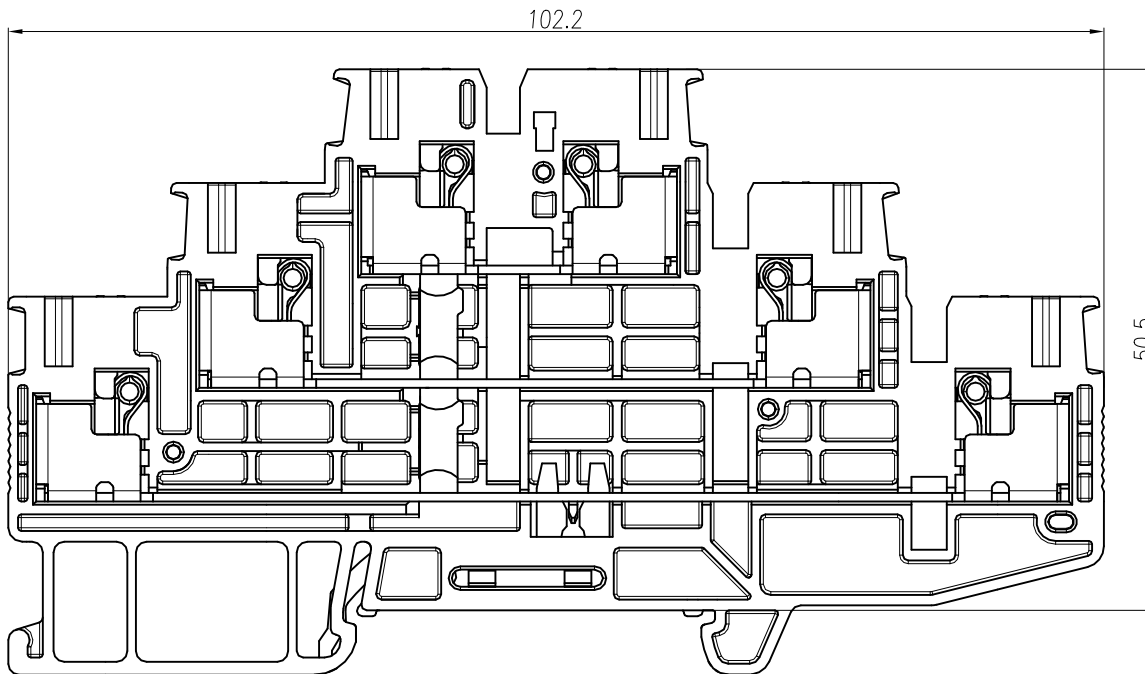

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

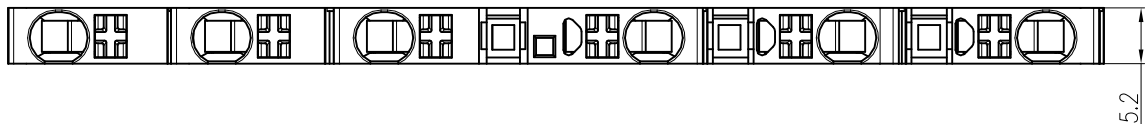

UL/CUL 技术参数 (UL1059) UL/CUL Technical Data							
等级	Use Group		B	C	F		
额定电压	Rated Voltage	[V]	-	-	-		
耐电压	Withstanding Voltage				2200V/1Min		
接线范围	Wire Range				26-12		
单/多芯线	Solid/Stranded	[AWG]					
IEC 技术参数 (IEC60947-7-2) IEC Technical Data							
过电压类别	Overvoltage Category				III		
污染等级	Contamination Class				3		
额定电压	Rated Voltage	[V]			-		
额定冲击电压	Impulse withstand voltagea	[KV]			6		
导线截面积	Conductor cross section						
单芯	Solid	[mm ²]			0.2-4		
柔性导线	flexible	[mm ²]			0.2-2.5		
柔性导线带冷压头	flexible with ferrule	[mm ²]			0.2-2.5		
材料 Material							
绝缘材料	Insulation Material				PA66		
阻燃等级	Imflammability				UL94V-0		
导体材料	Contact Material				铜合金 Copper alloy		
导体表面镀层	Contactive Coating				镀锡 Sn Plated		
一般参数 Other Data							
连接点数	connection points				6		
剥线长度	Stripping Length	[mm]			8-10		
导轨类型	Type of rail				DIN 35		
螺丝	Screw/扭矩 Torque(Max)	[N.m]			-		
工作温度	Operating temperatur	[°C]			-40-105		

linear dimension(Tolerances Standard GB/T 14486-2008)										—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

黄绿色/Green-Yellow	GUV2.5-302-PE-00A
颜色/Colour	订货号 /Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	V0-1
						名称 / TITLE	GUV2.5-302-PE-00A	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD