



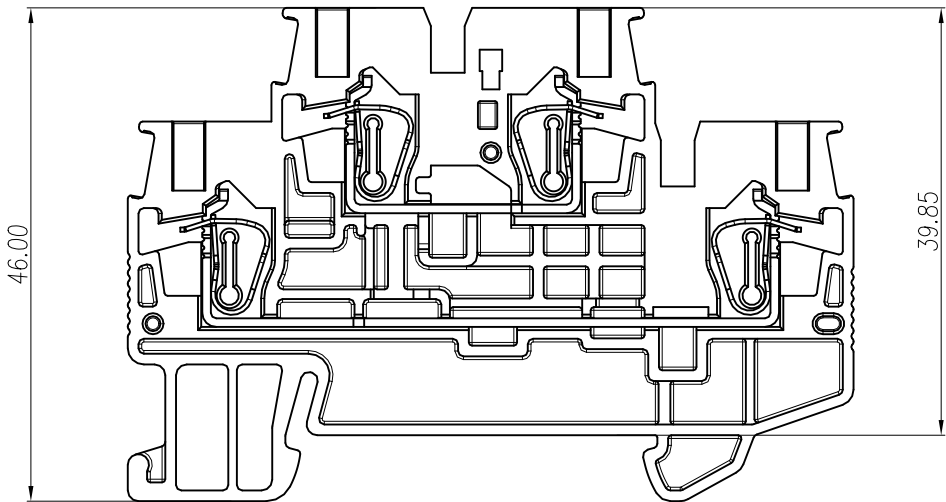

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

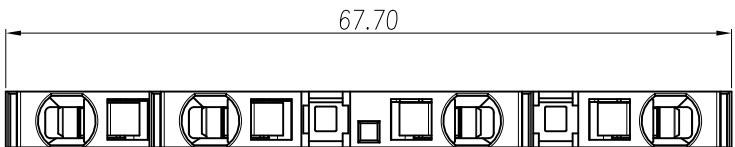

UL/CUL 技术 参数 (UL1059)					
UL/CUL Technical Data					
等 级	Use Group	B	C	D	
额定电压	Rated Voltage	[V]	300	300	600
额定电流	Rated Current	[A]	20	20	5
耐电压	Withstanding Voltage	1600V/1Min			
接线范围	Wire Range	26-12			
单/多芯线	Solid/Stranded	[AWG]			
IEC 技术参数 (IEC60947-7-1)					
IEC Technical Data					
过电压类别	Overvoltage Category	III			
污染等级	Contamination Class	3			
额定电压	Rated Voltage	[V]	500		
额定电流	Rated Current	[A]	22		
额定冲击电压	Impulse withstand voltagea	[KV]	6		
导线截面积 Conductor cross section					
单芯	Solid	[mm ²]	0.2-4		
柔性导线	flexible	[mm ²]	0.2-2.5		
柔性导线带冷压头	flexible with ferrule	[mm ²]	0.2-2.5		
材 料 Material					
绝缘材料	Insulation Material	PA66			
阻燃等级	Imflammability	UL94V-0			
导体材料	Contactior Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀锡 Sn Plated			
一般参数 Other Data					
连接点数	connection points	4			
剥线长度	Stripping Length	[mm]	8-10		
导轨类型	Type of rail	DIN 35			
螺丝 Screw/扭矩	Torque(Max)	[N.m]	--		
工作温度	Operating temperatur	[°C]	-40~105		

红色/Red	GUS2.5-202-RD-00A
黑色/Black	GUS2.5-202-BK-00A
黄色/Yellow	GUS2.5-202-YE-00A
绿色/Green	GUS2.5-202-GN-00A
橙色/Orange	GUS2.5-202-OG-00A
蓝色/Blue	GUS2.5-202-BU-00A
灰色/Gray	GUS2.5-202-GY-00A
颜色/Color	订货号 /Order NO.

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	GUS2.5-202-XX-00A	