




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

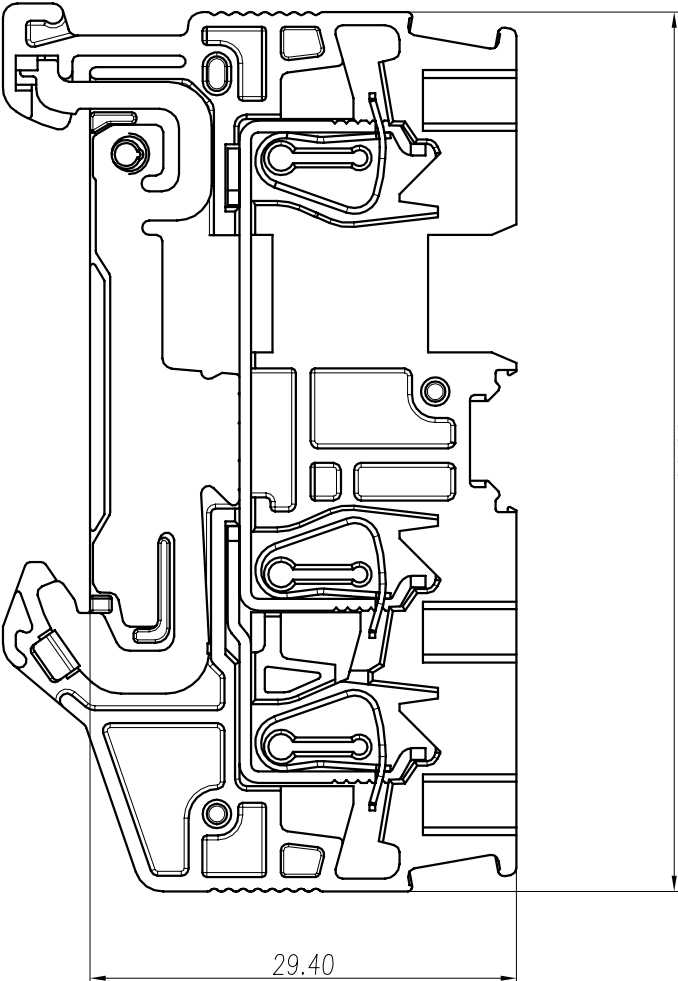

UL/CUL 技术参数 (UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage	V	-	-
耐电压	Withstanding Voltage	1600V/1Min		
接线范围	Wire Range	26-14		
单/多芯线	Solid/Stranded	[AWG]		
IEC 技术参数 (IEC8947-2)				
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage	V		
额定冲击电压	Rated impulse voltage	KV		
导线横截面积	Conductor cross section	mm ²		
单芯	Solid	0.2-1.5		
柔性导线	flexible	0.2-1.5		
柔性导线带冲压头	flexible with ferrule	0.2-1.5		
材料				
绝缘材料	Insulation Material	PA66		
阻燃等级	Inflammability	UL94V-0		
导体材料	Conductor Material	铜合金 Copper alloy		
导体表面镀层	Conductive Coating	镀锡 Sn Plated		
一般参数				
连接点数	connection points	3		
剥线长度	Stripping Length	8-10		
导线类型	Type of rail	DIN 35		
螺丝	Screw Torque(Max)	N.m		
工作温度	Operating temperatur	℃		

linear dimension(Tolerances Standard GB/T 14486-2008)									
variable range	to	over	to	over	to	over	to	over	to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

黄绿色 green-yellow	GUS1.5-103-PE-00A
颜色 Color	订货号 Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称 / TITLE	GUS1.5-103-PE-00A				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD



版本 / REV	V0
----------	----